


5767114-6 Product Details

[Share](#) |
 [Print](#) |
 [Email](#)

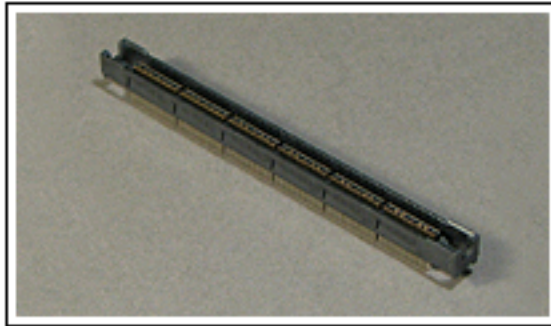

5767114-6

TE Internal Number: 5767114-6

[Active](#)

.025 [0.64] Centerline Matched Impedance Connector (MICTOR)

[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Connector
- Connector Style = Receptacle
- Mated Stack Height (Vertical) = 6.60 mm, 9.00 mm, 10.92 mm, 12.57 mm, 15.62 mm, 17.96 mm, 18.00 mm, 18.75 mm, 20.00 mm, 21.60 mm, 22.86 mm, 27.00 mm, 27.80 mm, 29.00 mm, 31.90 mm
- 228 Positions
- Vertical Mount Angle

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) |
 [Request Sample](#) |
 [Find Similar Products](#) |
 [Buy Product](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • RECEPTACLE ASSEMBLY, VERTICAL, .025[0.64]CL, GULL WI... (PDF, English) <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • None Available <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information • High Speed MICTOR Cable Assemblies <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	--

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Product Type = Connector • Mount Angle = Vertical <p>Dimensions:</p> <ul style="list-style-type: none"> • Mated Stack Height (Vertical) (mm [in]) = 6.60 [0.260], 9.00 [0.354], 10.92 [0.430], 12.57 [0.495], 15.62 [0.615], 17.96 [0.707], 18.00 [0.709], 18.75 [0.738], 20.00 [0.785], 21.60 [0.850], 22.86 [0.900], 27.00 [1.062], 27.80 [1.093], 29.00 [1.143], 31.90 [1.255] <p>Body Features:</p> <ul style="list-style-type: none"> • Number of Positions = 228 • Vacuum Cover = With <p>Contact Features:</p> <ul style="list-style-type: none"> • Contact Plating, Mating Area, Material = Gold or Palladium Nickel or Performance Based <p>Housing Features:</p> <ul style="list-style-type: none"> • Connector Style = Receptacle 	<p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Reflow solder capable to 245°C, Reflow solder capable to 260°C • RoHS/ELV Compliance History = Always was RoHS compliant <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • PCB Thickness, Recommended (mm [in]) = 1.57 [0.062] <p>Packaging Features:</p> <ul style="list-style-type: none"> • Packaging Method = Pocket Tape <p>Other:</p> <ul style="list-style-type: none"> • Ground Bus Lead Type = Barbless • Brand = AMP
---	--

Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

Customer Support

- [Email or Chat With Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage your Account](#)

Keep Me Informed

Receive TE News, Events & Technology Updates