


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION, 19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
FI	25				K	REACTIVATED:-4; EC ON20-0045-98	21 AUG98	DD / EH

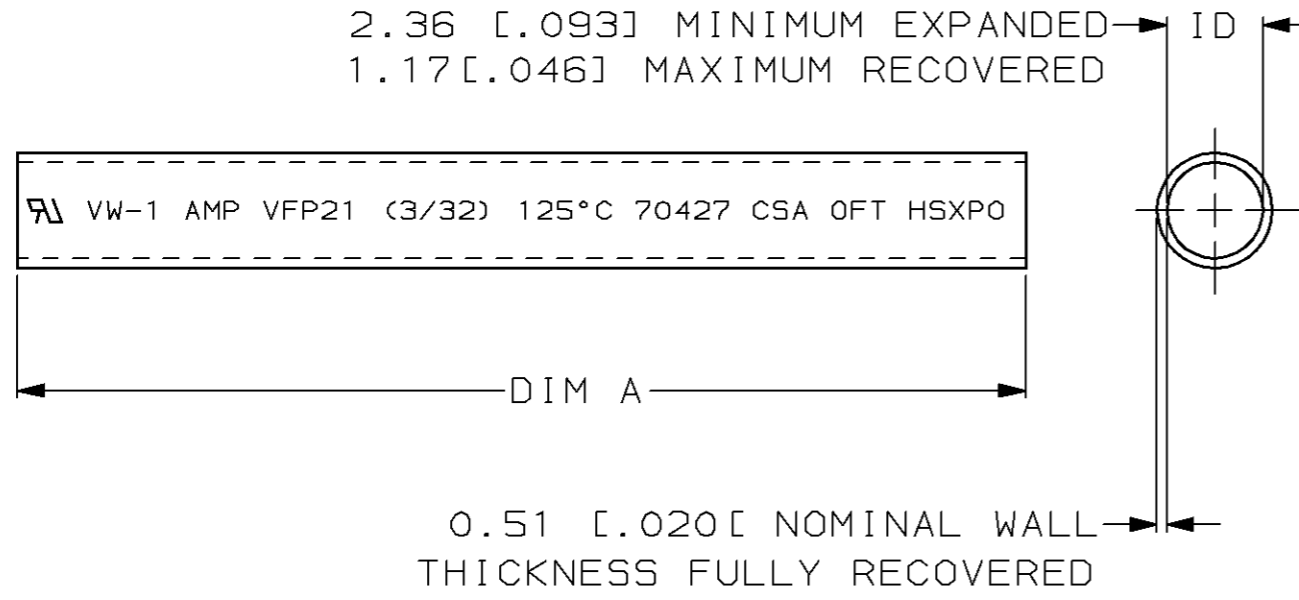

- 1 TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED.
- 2 TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600V AND MEETS VW-1 FLAME TEST.
- 3 TUBING VFP21 IS CSA CERTIFIED AND MEETS OFT FLAME TEST.
- 4 TUBING FP21 IS UNMARKED AND MEETS REQUIREMENTS OF MIL-I-23053/5-103-0.
- 5 WEIGHT PER LINEAR FOOT: 304.8 mm: .86 GRAM/.002 POUND.

4	4	4	1219.2±12.7 [48.00±.50]	1-603323-6
4	4	4	152.4 m [500 FEET] MINIMUM	603323-6
1	2 3	4	152.4 m [500 FEET] MINIMUM	603323-5
			304.8±3.05 [12.00±.12]	603323-4
			1219.2±12.7 [48.00±.50]	603323-1
MARKING	SEE NOTES		DIM A	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± -	DR 6-10-94 W CHANDLER	AMP AMP Incorporated Harrisburg, PA 17105-3608	
	CHK 1-30-95 D HUSSEY		
	APPD 2-15-95 D KAAT		
	APPD 2-15-95 F HARNED		
	PRODUCT SPEC -		
MATERIAL BLACK POLYOLEFIN	NAME AMPSULATION VFP21 AND FP21, 3/32 INCH ID, BLACK		
FINISH -	SIZE B	CAGE CODE 00779	DRAWING NO C-603323
	APPLICATION SPEC -	SCALE NONE	SHEET 1 OF 1
	WEIGHT 5		

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.