


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		T		EC 0G3C 0734 04	17DEC04	BSV	JLG
		T1		REVISED PER ECO-09-020932	25AUG09	KK	AEG

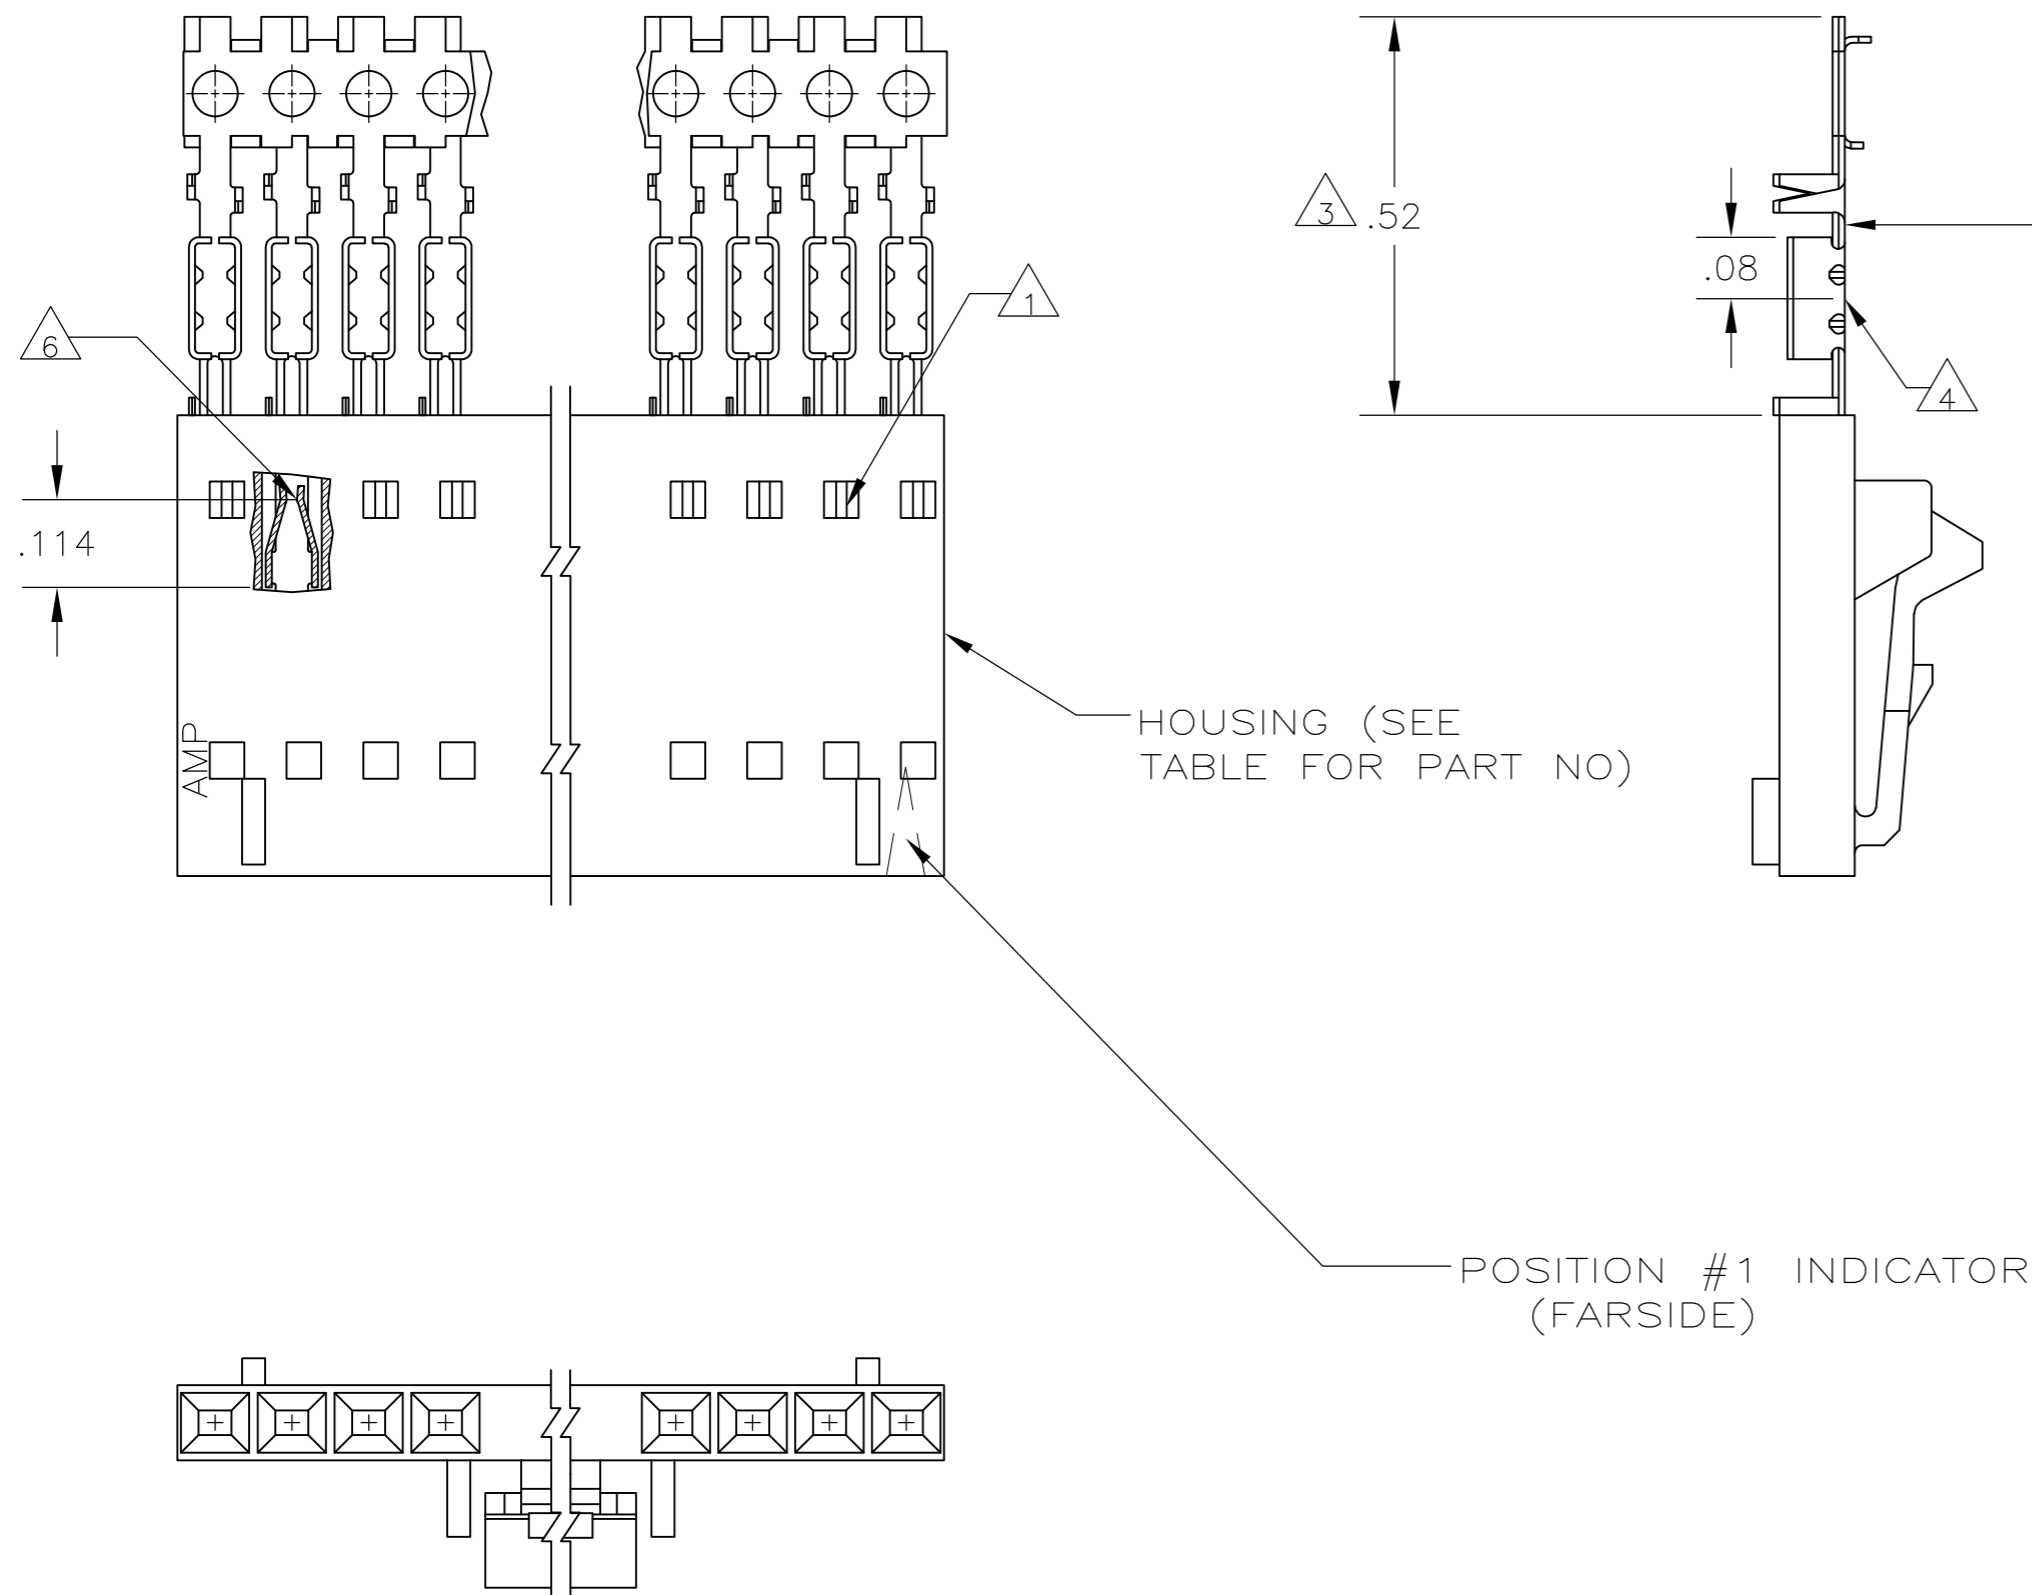

CONTACT IDENTIFICATION LETTER "A" (LOCATED IN THIS AREA)

9	8	2-104257-4	25	7-103640-4
OBSOLETE	8	2-104257-3	24	7-103640-3
	8	2-104257-2	23	7-103640-2
	8	2-104257-1	22	7-103640-1
OBSOLETE	8	2-104257-0	21	7-103640-0
	8	1-104257-9	20	6-103640-9
	8	1-104257-8	19	6-103640-8
	8	1-104257-7	18	6-103640-7
	8	1-104257-6	17	6-103640-6
OBSOLETE	8	1-104257-5	16	6-103640-5
	8	1-104257-4	15	6-103640-4
	8	1-104257-3	14	6-103640-3
OBSOLETE	7	2-104257-4	25	2-103640-4
	7	2-104257-3	24	2-103640-3
	7	2-104257-2	23	2-103640-2
SUPERSEDED	7	2-104257-1	22	2-103640-1
OBSOLETE	7	2-104257-0	21	2-103640-0
	7	1-104257-9	20	1-103640-9
	7	1-104257-8	19	1-103640-8
	7	1-104257-7	18	1-103640-7
	7	1-104257-6	17	1-103640-6
OBSOLETE	7	1-104257-5	16	1-103640-5
	7	1-104257-4	15	1-103640-4
	7	1-104257-3	14	1-103640-3
SUPERSEDED	7	1-104257-2	13	1-103640-2
SUPERSEDED BY 1-103960-1 SUPERSEDED BY 1-103960-0 SUPERSEDED BY 103960-9 SUPERSEDED BY 103960-8 SUPERSEDED BY 103960-7 SUPERSEDED BY 103960-6 SUPERSEDED BY 103960-5 SUPERSEDED BY 103960-4 SUPERSEDED BY 103960-3 SUPERSEDED BY 103960-2 SUPERSEDED BY 103960-1	7	1-104257-1	12	1-103640-1
	7	1-104257-0	11	1-103640-0
	7	104257-9	10	103640-9
	7	104257-8	9	103640-8
	7	104257-7	8	103640-7
	7	104257-6	7	103640-6
	7	104257-5	6	103640-5
	7	104257-4	5	103640-4
	7	104257-3	4	103640-3
	7	104257-2	3	103640-2
7	104257-1	2	103640-1	

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR STRIP ASSEMBLIES SEE PART NUMBER 103960
- 6 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 7 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 8 CONTACTS: .000015 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L A MAYER 11-4-86	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK P de Jong 11-12-86	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD P de Jong 11-12-86	RCPT ASSY, AMPMODU MTE, SINGLE, LATCHED & POLARIZED, FOR #26-#30 AWG WIRE SIZE	
0 PLC ± -		PRODUCT SPEC 108-25034	SIZE A2	CAGE CODE 00779
1 PLC ± -		APPLICATION SPEC 114-25026	DRAWING NO	RESTRICTED TO
2 PLC ± .02		WEIGHT -	C=103640	
3 PLC ± .005		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 of 1
4 PLC ± -				REV T1
FINISH SEE TABLE				