
Distributed by:



www.Jameco.com + 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 755585

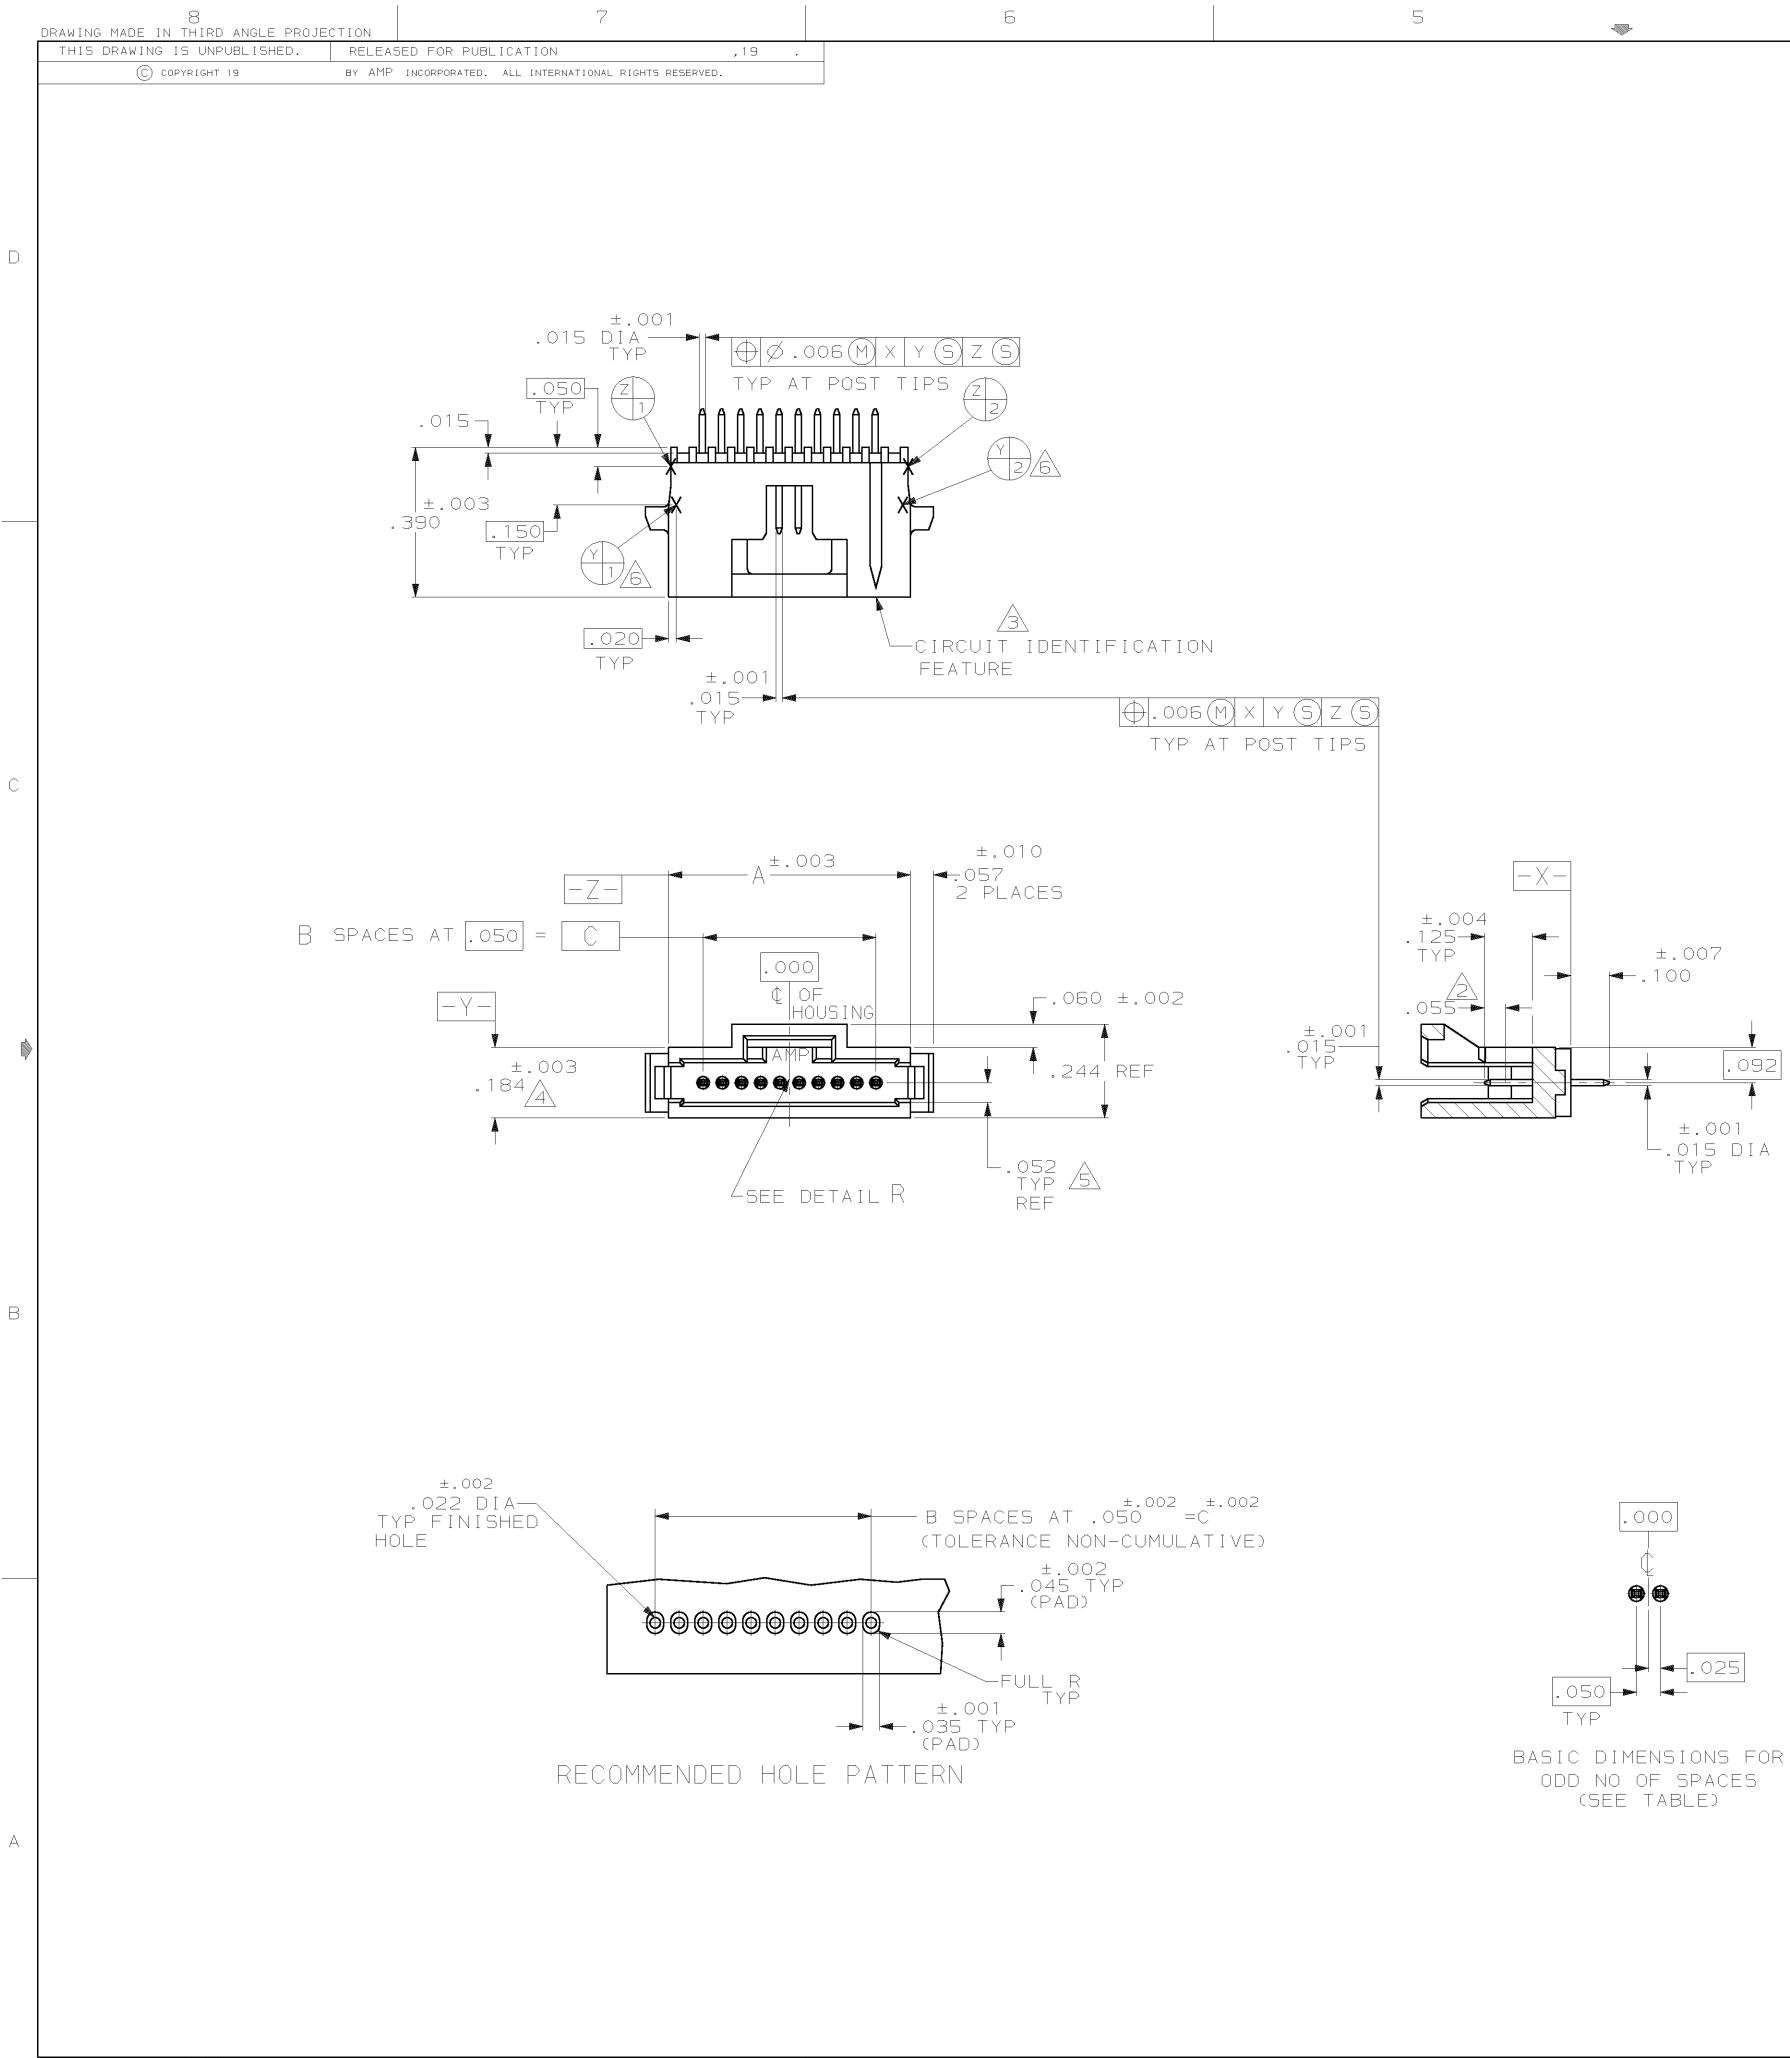


11-DEC-95 15:41:57 amp23865 /home/ssrv026d/dsk01/dept1324/amp23865/edmmod

V

AMP 1756-3 REV 3-87

1			
		1	
	L		\prec
	. 1	<u> </u>	. 1
	0		0

_ _ _ _ _ _ _ _

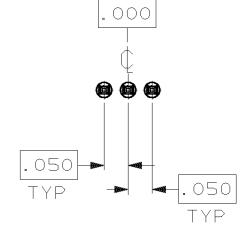

BASIC DIMENSIONS FOR EVEN NO OF SPACES (SEE TABLE)

	1	. 450	9	. 630	10	104071-1	
		С	В	А	NO OF POSN	PART NUMBER	
						PART NO	Ť
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± -	DR 12-19-88 K. HELM CHK 12-19-88 H. MOLL	AMP INCORPORATED Harrisburg, Pa. 17105					A
3 PLC DEC ± .005 ANGLES ± - MATERIAL HOUSING:THERMOPLASTIC COLOR-BLACK CONTACT:COPPER ALLOY	APPD 12-19-88 R. DURBIN APPD 12-19-88	HEADER ASSEMBLY, VERTICAL,					
	W. PARKER Product spec 108-1093	SINGLE ROW,W/SIDE & END LATCHES,AMPMODU® System 50					-
FINISH	application spec 114-25031	SIZE FSCM NO DRAWING NO					-
	WEIGHT _	SCALE .	4:1		SHI	^{eet} 1 of 1	-
				CUS	TOME	ER DRAWING	Ì

\land	2.450	49	2.630	50	6-104071-9	
	2.200	44	2.380	45	6-104071-8	-
	1.950	39	2.130	40	6-104071-7	
	1.750	35	1.930	36	6-104071-6	- C
	1.300	26	1.480	27	6-104071-5	
	1.050	21	1.230	22	6-104071-4	-
	.800	16	. 980	17	6-104071-3	-
	.600	12	. 780	13	6-104071-2	-
	. 550	11	.730	12	6-104071-1	-
	. 350	7	.530	8	6-104071-0	-
	. 300	6	. 480	7	5-104071-9	_
	. 250	5	. 430	6	5-104071-8	-
	. 150	۲ ۲	. 330	4	5-104071-7	_
	1.450		1.630	30	5-104071-6	- 4-
	1.200	24	1.380	25	5-104071-5	-
	.950	19	1.130	20	5-104071-4	-
	. 700	14	.880	15	5-104071-3	-
	. 200	4	. 380	5	5-104071-2	-
	. 450	r (3)	.630	10	5-104071-1	-
OBSOLETE A						_
	1.250	25	1.430	26 50	2-104071-0	-
OBSOLETE /1	2.450	49	2.630	45	1-104071-9	-
	2.200	44	2.380		<u>1-104071-8</u> 1-104071-7	-
	1.950	39	2.130	40		-
	1.750	35	1.930	36	1-104071-6	_
	1.300	26	1.480	27	1-104071-5	- B
	1.050	21	1.230	22	1-104071-4	+
	. 800	16	.980	17	1-104071-3	-
	.600	12	.780	13	1-104071-2	-
	. 550	11	.730	12	1-104071-1	-
OBSOLETE /1	. 350	7	.530	8	1-104071-0	-
	. 300	6	. 480	7	104071-9	-
	. 250	5	. 430	6	104071-8	-
	. 150	m (.330	4	104071-7	-
	1.450	29	1.630	30	104071-6	+
	1.200	24	1.380	25	104071-5	+
	. 950	19	1.130	20	104071-4	-
	. 700	14	. 880 . 380	15	104071-3	-
	. 200	4		5	104071-2	-
<u> </u>	. 450	9	.630	10	104071-1	-
				NO	PART	-
	C	B	A	OF		-
	-			POSN	NUMBER	-
			<u> </u>	I	PART NO	+

CONTACT AREAS PLATED WITH .000030 GOLD, SOLDER TAILS PLATED WITH .000150 TIN, ALL OVER .000050 NICKEL

. 250

25

1.430

26

7-104071-0

EXCEPT ON OPPOSITE SIDE OF HOUSING.

 $\begin{pmatrix} Y \\ 4 \end{pmatrix}$ are located the same as $\begin{pmatrix} Y \\ 1 \end{pmatrix} \begin{pmatrix} Y \\ 2 \end{pmatrix}$

A THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST & HOUSING

 \triangle dimension applies at base of shroud

A CIRCUIT IDENTIFICATION FEATURE OMITTED ON 4,5,6 AND 7 POSITION HEADER ASSEMBLIES

2 POINT OF MEASUREMENT FOR GOLD THICKNESS

CONTACT AREAS PLATED WITH .000030 GOLD, SOLDER TAILS PLATED WITH .000150 TIN-LEAD, ALL OVER .000050 NICKEL

REVISIONS АD 39 DATE APPD DESCRIPTION ZONE LTR N REV PER 0G3C-0506-04 11N0V04 JR/[