


6 - 1337541 - 0 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

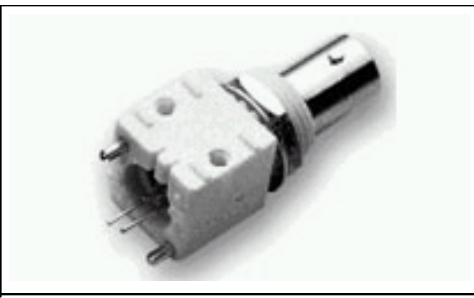

6 - 1337541 - 0

[Active](#)

BNC RF Connectors

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? Connector
- ? Connector Type = ZDC/BNC
- ? Jack
- ? Terminate To Printed Circuit Board
- ? Body Style = Straight

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [BNC STRAIGHT INSULATED PCB SOCKET 50 OHM WHITE](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = Connector
- ? Connector Type = ZDC/BNC
- ? [Gender](#) = Jack
- ? [Body Style](#) = Straight
- ? [PCB Mount Angle](#) = Vertical
- ? [Grade](#) = Commercial
- ? [PCB Height \(mm \[in\]\)](#) = 34.90 [1.374]
- ? [PCB Retention Feature](#) = Yes
- ? Mounting Post Style = Straight
- ? Mounting Post Length (mm [in]) = 4.30 [0.169]
- ? [Body Material](#) = Zinc
- ? [Body Insulation](#) = With
- ? [Sealed](#) = No
- ? [Isolated](#) = No
- ? [Dielectric Material](#) = Polyethylene
- ? [Color](#) = White
- ? Number of Ports = 1
- ? Panel Thickness (mm [in]) = 1.50 – 5.50 [0.059 – 0.217]
- ? PCB Thickness (mm [in]) = 3.20 [0.126]

Mechanical Attachment:

- ? Surface Mountable = No
- ? [Panel Attachment](#) = With
- ? [Panel Attachment Method](#) = Bulkhead, Hex Nut
- ? Panel Attachment Style = Rear Mount
- ? Panel Cutout = 12.0mm x 12.9mm D -Shape
- ? Flange and Thread Material = PBT Polyester
- ? Flange and Thread Material Color = White

Electrical Characteristics:

- ? [Connector Impedance \(?\)](#) = 50

Body Related Features:

- ? [Hardware Included](#) = No
- ? PCB Retention Method = Solder Tail (Pin)
- ? [Body Plating](#) = Nickel
- ? [Polarized](#) = No
- ? PCB Tail Length (mm [in]) = 5.80 [0.228]

Contact Related Features:

- ? [Center Contact Material](#) = Brass
- ? [Center Contact Plating](#) = Gold

Housing Related Features:

- ? Housing Material = Polyester (PBT)

Industry Standards:

- ? Government/Industry Qualification = No
- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- ? [Terminate To](#) = Printed Circuit Board
- ? Operating Temperature (Max.) (°C) = 85

Packaging Related Features:

- ? Packaging Method = Tray
- ? Packaging Quantity = 50

Other:

- ? Brand = Greenpar