Distributed by:



www.Jameco.com + 1-800-831-4242

The content and copyrights of the attached material are the property of its owner.

Jameco Part Number 614061



Electronics

Straight Exit RFI/EMI Shields for Jacketed Cable (Two-Piece)

This RFI/EMI shield allows cable to be fully prepared and terminated to the connector before the shield is installed. During installation, the shield of the jacketed cable is folded back and compressed into the cable opening of RFI/EMI shield. For g cable support and/or shielding effectivene split-ring and crimp are available (pages 150).

Material and Finish:

Die Cast Shield-Zinc alloy bright nickel over bright copp Metal-Plated Plastic Shiel Thermoplastic, plated nickel or 4-40 Fillister Head Screws Hex Nuts---Steel, zinc plated 4-40 Mounting Screws-S plated

Jackscrews-Stainless steel passivated


Related Product Data:

Ferrules—pages 148-150 Connectors used with: HDE Metal-Shell—pages 1 HDP Metal-Shell (Tin plate only)-pages 95-107 Other accessory capabiliti Spring Latch (Two-Piece)-page 157

Technical Documents:

Product Specification-108-40032 Instruction Sheet-408-660

Shielded Cable Clamps

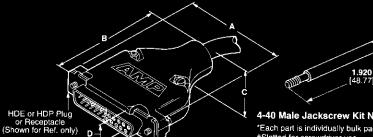

4-40 Male Jackscrew Kit Nos.: 747784-8 (bulk packed)*+ 'Each part is individually bulk packed for multiple kit orders. †Slotted for screwdriver use.

	Shell	Dimensions				Cable	Die Cast	Metal-Plated		Grommet Sets	
	Size	A	В	С	D	O.D. (Max.)	Shield Kit Numbers	Plastic Shield Kit Numbers	Cable O.D. Range	No. of Grommets Per Set	Part Number
						.200 5.08	745171-2	745854-5		_	_
	1	1.215 30.86	1.910 48.51	. 550** 13.97	.620** 15.75	.250 6.35	745171-1	745854-3	-		
						.370 9.40	745171-5	745854-1	.185320 4.70-8.13	4	747746-1
						. 225 5.72	745172-3	747099-7		_	
	<u> </u>	1.545	1.910	.620	.620	.300 7.62	745172-2	747099-5			
	2	39.24	48.51	15.75	15.75	.375 9.53	745172-1	747099-3	.185320 4.70-8.13	4	747746-1
						. 430 10.92	1-745172-3	747099-1		_	_
			1.920 48.77	. 680 17.27	. 620** 15.75	.280 7.11	745173-5	745833-9			
		2.090 53.09				.350 8.89	745173-4	745833-7			_
	3					. 430 10.92	745173-3	745833-5	_	_	_
						.480 12.19	745173-2	745833-3			
						. 530 13.46	745173-1	745833-1	.255470 6.48-11.94	6	747973-1
		2.738 69.55	1.9 20 48.77	.800 20.32	. 620 15.75	.350 8.89	745174-5	747100-9	_		
						.425 10.80	745174-4	747100-7	_		
						.500 12.70	745174-3	747100-5			
	4					. 530 13.46	2-745174-7	1-747100-1	.255470 6.48-11.94	6	747973-1
						.575 14.61	745174-2	747100-3		_	
						.650 16.51	745174-1	747100-1			_
		2.644 67.16	1.920 48.77	.900 22.86	. 730 - 18.55 -	.375 9.53	745175-6		_		
	5					. 450 11.43	745175-5		_		
						. 525 13.34	745175-4		.255470 6.48-11.94	6	747973-1
						.600 15.24	745175-3				
						.675 17.15	745175-2				
						. 750 19.05	745175-1	747098-1			

Cable Clamp Kits with Grommets

Shell Size		Dimen			Cable	No, of	Kit Numbers		
	A	Unnen: B	C D		O.D. Range	Grommets Per Set	Die Cast Shield With Grommets	Metal-Plated Plastic Shield With Grommets	
1	1.215 30.86	1.910 48.51	.550** 13.97	. 620** 15.75	185320 4.70-8.13	4	748676-1	748677-1	
2	1 .545 39.24	1.910 48.51	.620 15.75	.620 15.75	.185320 4.70-8.13	4	748676-2	748677-2	
3	2.090 53.09	1.920 48.77	.680 17.27	.620** 15.75	.255470 6.48-11.94	6	748676-3	748677-3	
4	2.738 69.55	1 .920 48.77	.800 20.32	.620 15.75	.255470 6.48-11.94	6	748676-4	748677-4	
5	2.644 67.16	1.920 48.77	.900 22.86	.730 18.54	255470 6.48-11.94	6	748676-5	748677-5	

All parts are packaged unassembled. Jackscrews must be purchased separately.

2. 3.

to change.

4.

Dimensions are shown for

reference purposes only. Specifications subject

Saltscrews must be porchased separately. Split-ring and crimp ferrules are shown on pages 148-150. Shielded cable clamps will not accept connector housings with clinch nuts.

The following dimensions apply to metal-plated plastic cable clamps: Size 1: C=.570 [14.48], D=.630 [16.0] Size 3: D=.640 [16.26] cable clamos:

USA: 1-800-522-6752 Canada: 1-905-470-4425 Mexico: 01-800-733-8926 C. America: 52-55-5-729-0425 South America: 55-11-3611-1514 Hong Kong: 852-2735-1628 Japan: 81-44-844-8013 UK: 44-141-810-8967

146

Catalog 82068 Revised 3-04

www.tycoelectronics.com

Dimensions are in inches and millimeters unless otherwise specified. Values in brackets are metric equivalents.