



MICTOR Vertical Plugs, 0.64 [.025] Pitch (Continued)


**22.86 [.900]
Stacking Height**

Related Product Data:


- Material and Finish** — page 28
- Performance Characteristics**
page 28
- Mating Receptacles** — page 36

**Technical Documents
(Page 70):**

AMP Product Specification
108-1422

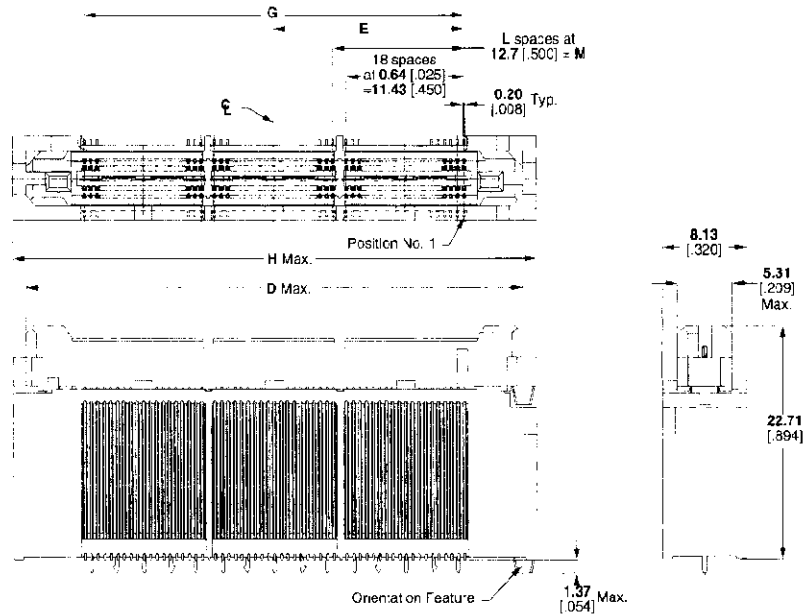

For connectors 190 positions and larger, Customer must provide fold-downs for PC board to chassis.

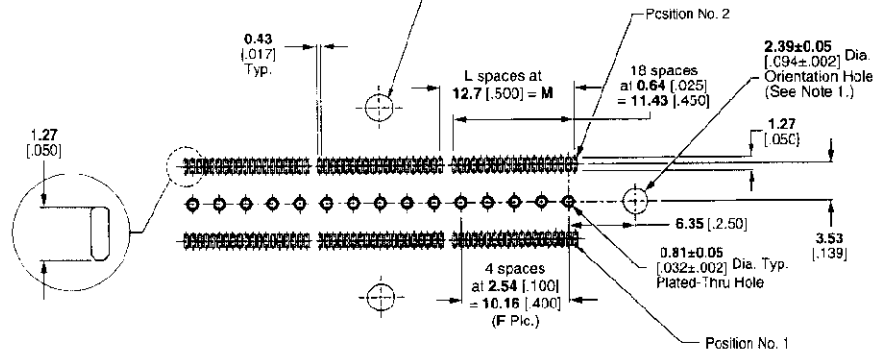

**Recommended PC Board Layout
(Connector Side of Board Shown)**

No. of Positions	Dimensions							Plug Part Numbers (Gold Plating)
	D	E	F	G	H	L	M	
38	22.81 .898	5.72 .225	1	11.43 .450	25.55 1.006	0	—	767017-1
76	35.51 1.398	12.07 .475	2	24.13 .950	38.25 1.506	1	12.70 .500	767017-2
114	48.21 1.898	18.42 .725	3	36.83 1.450	50.95 2.006	2	25.40 1.000	767017-3
152	60.91 2.398	24.77 .975	4	49.53 1.950	63.65 2.506	3	38.10 1.500	767017-4
190	73.61 2.898	31.16 1.225	5	62.23 2.450	76.35 3.006	4	50.80 2.000	767017-5
228	86.31 3.398	37.47 1.475	6	74.93 2.950	89.05 3.506	5	63.50 2.500	767017-6
266	99.01 3.898	43.82 1.725	7	87.63 3.450	101.75 4.006	6	76.20 3.000	767017-7

- Notes:** 1. For dual application, the orientation hole must be 1.98 ± 0.03 [.078 ± .001]. See Application Specification 114-11004 for details.
2. For right-angle plugs, see AMP catalog 65194.
3. Plugs with extended ground bus leads can be made available, consult AMP.

**MICTOR
Connectors**