

MICTOR Vertical Plugs, 0.64 [.025] Pitch (Continued)

17.96 [.707]
Stacking Height

Related Product Data:


Material and Finish — page 28

Performance Characteristics —
page 28


Mating Receptacles — page 36

Technical Documents
(Page 70):

AMP Product Specification
108-1422

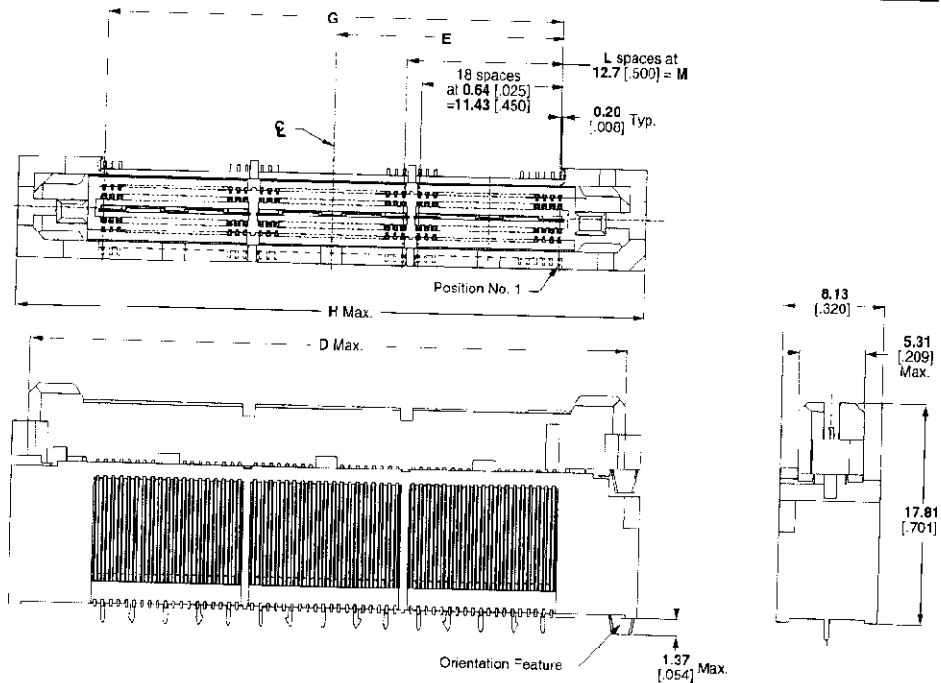

For connectors 190 positions and larger, Customer must provide holdowns for PC board to chassis.

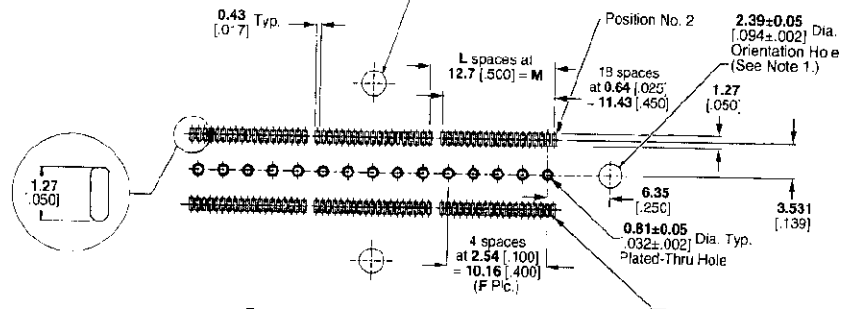

Recommended PC Board Layout
(Connector Side of Board Shown)

No. of Positions	Dimensions							Plug Part Numbers (Gold Plating)
	D	E	F	G	H	L	M	
38	22.81 .898	5.72 .225	1	11.43 .450	25.55 1.006	0	—	767025-1
76	35.51 1.398	12.07 .475	2	24.13 .950	38.25 1.506	1	12.70 .500	767025-2
114	48.21 1.898	18.42 .725	3	36.83 1.450	50.95 2.006	2	25.40 1.000	767025-3
152	60.91 2.398	24.77 .975	4	49.53 1.950	63.65 2.506	3	38.10 1.500	767025-4
190	73.61 2.898	31.16 1.225	5	62.23 2.450	76.35 3.006	4	50.80 2.000	767025-5
228	86.31 3.398	37.47 1.475	6	74.93 2.950	89.05 3.506	5	63.50 2.500	767025-6
266	99.01 3.898	43.82 1.725	7	87.63 3.450	101.75 4.006	6	76.20 3.000	767025-7

- Notes:**
1. For dual application, the orientation nole must be 1.98 ±0.03 [.078 ±.001]. See Application Specification 114-11004 for details.
 2. For right-angle plugs, see AMP catalog 65194.
 3. Plugs with extended ground bus leads can be made available, consult AMP.

MICTOR
Connectors