

**Vertical Receptacles, 0.64 [0.025] Pitch (Continued)**

**Extended Height**

15.62 [.615], 19.94 [.785], 21.59 [.850]  
Stacking Heights

**Related Product Data**

**Material and Finish** — Page 131

**Performance Characteristics** —  
Page 131

**Mating Plugs** — Pages 133-135, 138

**Technical Documents**





**Product Specification**

\*03-1422

**Application Specification**

\*14-11004

**See MICTOR Connectors  
Stacking Height Selection Guide  
for Receptacle/Plug Combinations,  
page 132.**

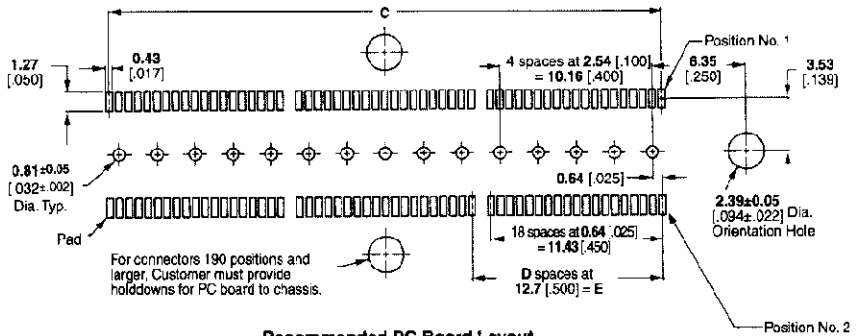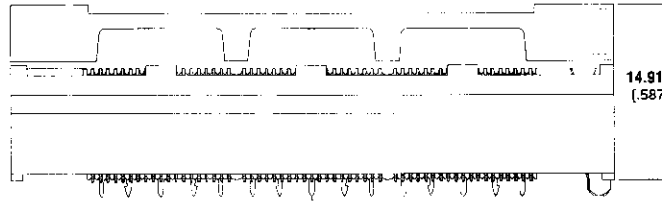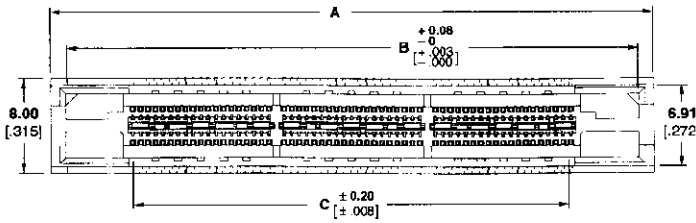

**Recommended PC Board Layout  
(Connector Side of Board Shown)**

No. of Positions	Dimensions					Extended Height Palladium-Nickel Plating
	A	B	C	D	E	
38	25.40 1.000	22.86 .900	11.43 .450	0	—	767094-1
76	38.10 1.500	35.56 1.400	24.13 .950	1	12.70 .500	767094-2
114	50.80 2.000	48.26 1.900	36.83 1.450	2	25.40 1.000	767094-3
152	63.50 2.500	60.96 2.400	49.53 1.950	3	38.10 1.500	767094-4
190	76.20 3.000	73.66 2.900	62.23 2.450	4	50.80 2.000	767094-5
228	88.90 3.500	86.36 3.400	74.93 2.950	5	63.50 2.500	767094-6
266	101.60 4.000	99.06 3.900	87.63 3.450	6	76.20 3.000	767094-7

\*One ground bus with 5 tails per each 38-position module.

Notes: 1. For dual application, the orientation hole must be 1.98 ± 0.03 [0.078 ± .001]. See Application Specification 114-11004 for details.