


Product Details for 849581 -5

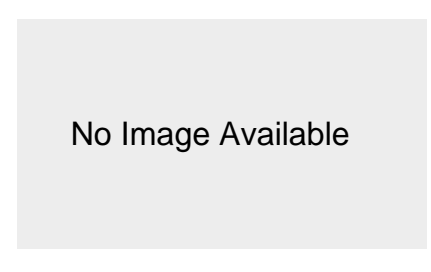

No Image Available

849581 -5

[Active](#)

LGH Single - Pin Connectors and Cable Assemblies

[Not ELV or RoHS Compliant](#) (Find RoHS Compliant Alternates)

Product Highlights:

- ? Lead Assembly
- ? 25 kVDC Operating Voltage
- ? Lead Assembly Type = Double -End
- ? Assembly Length = 1,143.00 mm
- ? Barrel Depth = 22.35 mm

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [RFI SHIELDED LEAD ASSY DOUBLE MOLDED END LGH -1](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? [Standard LGH Connectors, Series 1/2I, 1/2LI, 1I, 1LI...](#) (PDF, English)

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = Lead Assembly
- ? [Mount Angle](#) = Straight
- ? [Cap Material](#) = Aluminum
- ? Wire Size (mm² [AWG]) = 16

Electrical Characteristics:

- ? [Operating Voltage \(kVDC\)](#) = 25

Body Related Features:

- ? [Lead Assembly Type](#) = Double -End
- ? [Assembly Length \(mm \[in\]\)](#) = 1,143.00 [45.034]
- ? [Barrel Depth \(mm \[in\]\)](#) = 22.35 [0.880]
- ? [Positive Stop Ferrule](#) = Without
- ? [RFI Shielded](#) = Yes
- ? Wire Color = White (Standard)
- ? Cap Finish = Aluminum
- ? Wire Diameter (mm [in]) = 8.64 [0.340]
- ? Wire Insulation = Silicone

Industry Standards:

- ? [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- ? [Lead Free Solder Processes](#) = Not relevant for lead free process

Other:

- ? Brand = AMP