




964133-2 Product Details

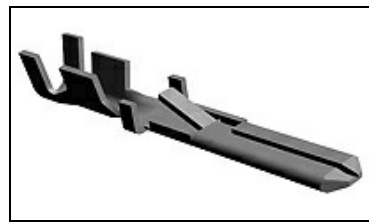

964133-2

TE Internal Number: 964133-2

Active

Timer Contacts

Always EU RoHS/ELV Compliant (Statement of Compliance)

Product Highlights:

- Timer Products Product Line
- Junior Timer Series, Junior-Power-Timer (JPT) Series, Multiple Circuit Housings with Tabs & Receptacles (Including FASTIN-FASTON) Series
- Wire-to-Wire
- Applies To Wire/Cable
- Contact

[View all Features](#)

Quick Links

- ▶ [Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

[Add to My Part List](#) | [Request Sample](#) | [Find Similar Products](#) | [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [FASTIN-FASTON 2.8mm Flachstecker FASTIN-FASTON 2.8...](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- [Allgemeine Crimpspezifikation / GENERAL CRIMP SPEC.](#) (PDF, German)

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Additional Product Images:

- [Line Drawing](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- Product Line = Timer Products
- [Product Type](#) = Contact
- Cable Type = FLR (Thin Walled Cable)
- Wire/Cable Type = Discrete Wire
- Insulation Support = With

Electrical Characteristics:

- Contact - Rated Current (A) = 25

Termination Features:

- Wire/Cable Size (AWG) = 13 - 17
- Wire/Cable Size (mm²) = 1 - 2.5
- Termination Method to Wire/Cable = Crimp

Dimensions:

- Mating Area Interface Dimensions (mm [in]) = 2.79 x 0.79 [.110 x .031]

Contact Features:

- Contact Type = Tab
- Contact Design = FASTIN-FASTON
- Contact Base Material = CuSn4
- Contact Plating, Mating Area, Material = Pre-Tin
- Contact Plating, Mating Area, Thickness (µm [µin]) = 1 [39.37]

Configuration Features:

- GET 0.64 Connector System = No
- Single Wire Sealing System = No

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not reviewed for lead free solder process
- RoHS/ELV Compliance History = Always was RoHS compliant

Environmental:

- Operating Temperature (°C [°F]) = -40 - +130 [-40 - +266]

Conditions for Usage:

- Applies To = Wire/Cable
- Accepts Wire Insulation Diameter, Range (mm [in]) = 2.10 - 3.10 [0.0826 - 0.122]

Operation/Application:

- Application Use = Wire-to-Wire
- Contact Transmits (Typical Application) = Power

Packaging Features:

- Packaging Method = Reel
- Packaging Quantity = 3,000

Other:

- Series = Junior Timer, Junior-Power-Timer (JPT), Multiple Circuit Housings with Tabs & Receptacles (Including FASTIN-FASTON)
- Brand = AMP

Corporate Information

[About TE](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)
[Terms & Conditions](#)
[Privacy Policy](#)
[AODA Accessibility Policy](#)
[AODA Multi-Year Accessibility Plan](#)

Quick Links

[Distributor Inventory](#)
[Product Cross Reference](#)
[Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat With Us](#)
[Find a Phone Number](#)
[Knowledge Base](#)
[Manage Your Account](#)

Keep Me Informed

