


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	ECR-12-005726	27MAR12	RK	MY

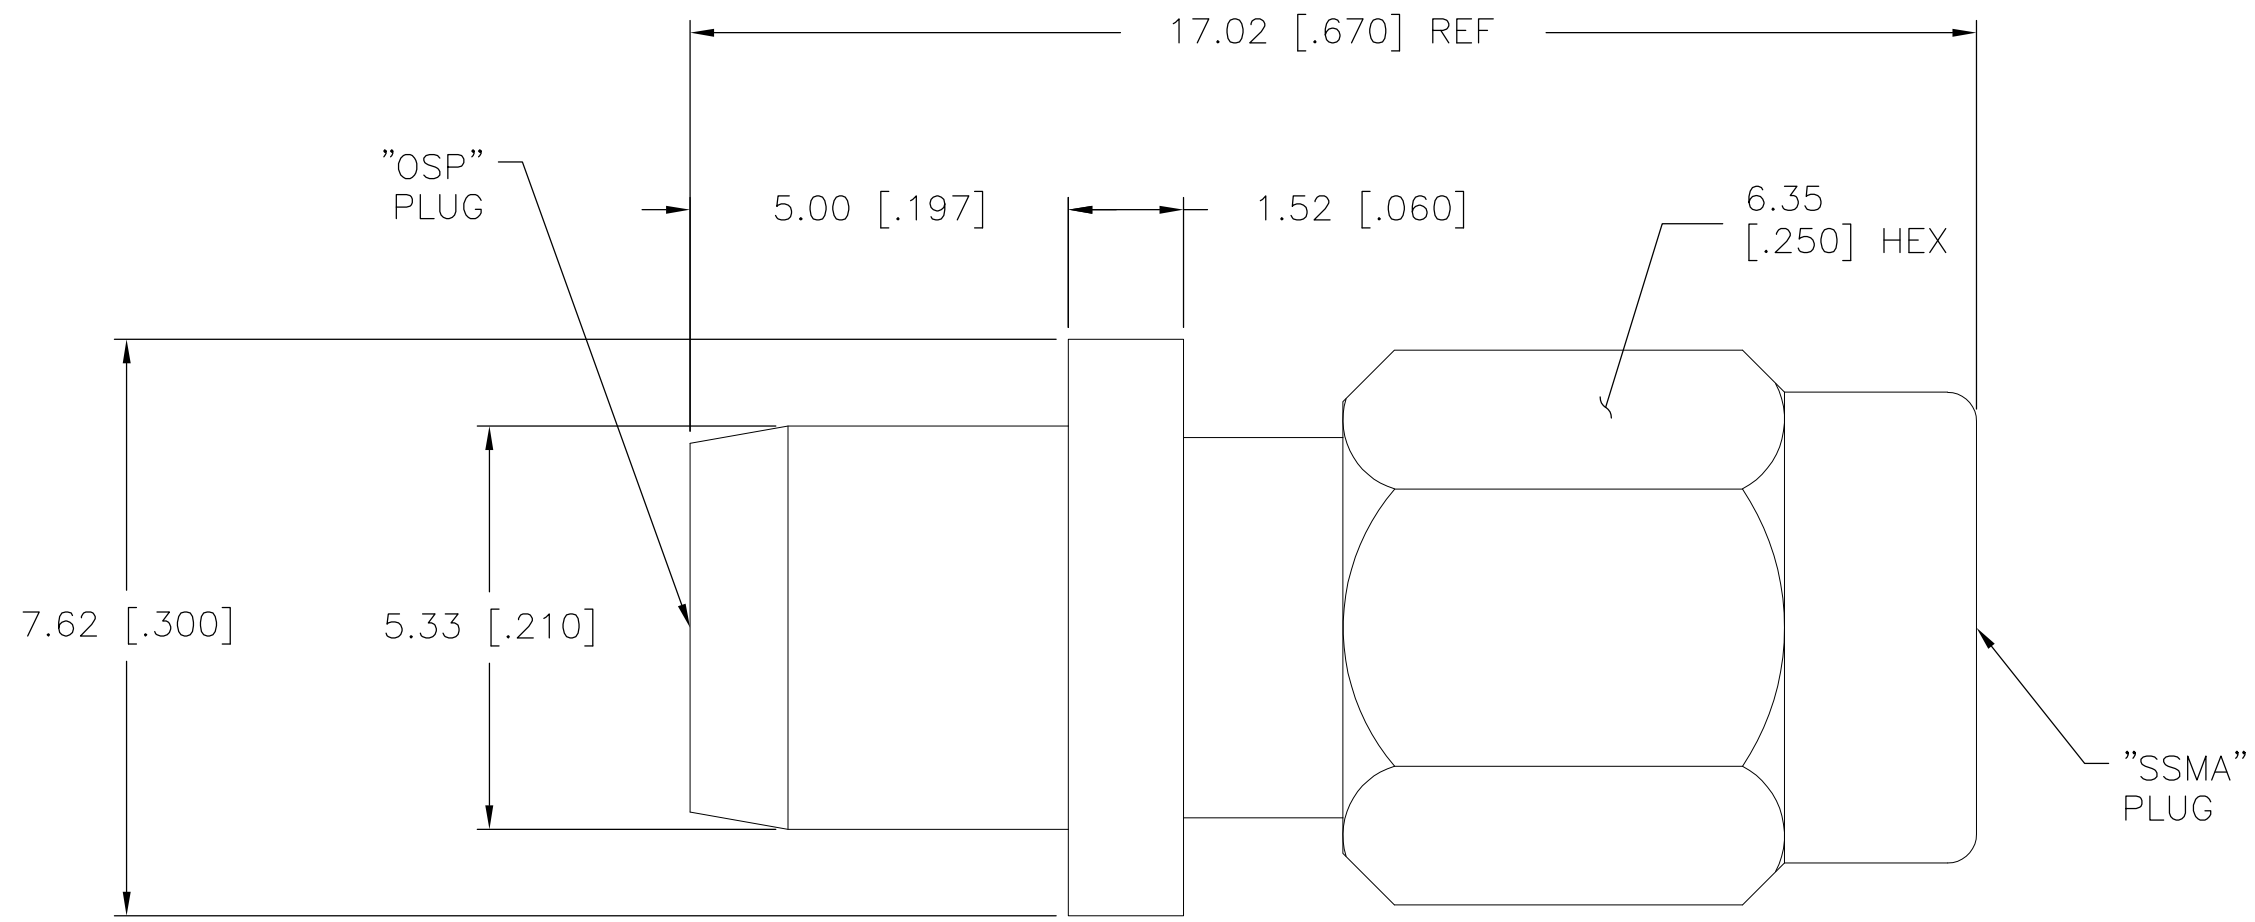

**MATERIAL:**  
 CENTER CONDUCTOR- BRASS PER ASTM-B-16  
 OUTER CONDUCTOR- STAINLESS STEEL PER ASTM A582  
 DIELECTRIC- PTFE PER MIL-P-19468  
 RETAINING RING- BERYLLIUM COPPER PER ASTM-B-196  
 GASKET- SILICONE RUBBER PER ZZ-R-765

**PLATING:**  
 INNER CONDUCTOR- GOLD PER MIL-G-45204  
 OUTER CONDUCTOR- PASSIVATED

1059709-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN G. VIERA	06MAY03	<b>STE</b> TE Connectivity	
DIMENSIONS: MM [INCHES]		CHK D. CAMELIO	07MAY03		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. CAMELIO	07MAY03	NAME OSP PLUG TO SSMA PLUG 4581-2211-02	
0 PLC ± -		PRODUCT SPEC		SIZE	
1 PLC ± -		APPLICATION SPEC		CAGE CODE	DRAWING NO
2 PLC ± -		WEIGHT		A3	00779
3 PLC ± 0.13 [.005]		CUSTOMER DRAWING		G=1059709	
4 PLC ± -		SCALE		10:1	
ANGLES ± -		SHEET		1 OF 1	
FINISH		RESTRICTED TO		REV	
-		-		A1	