

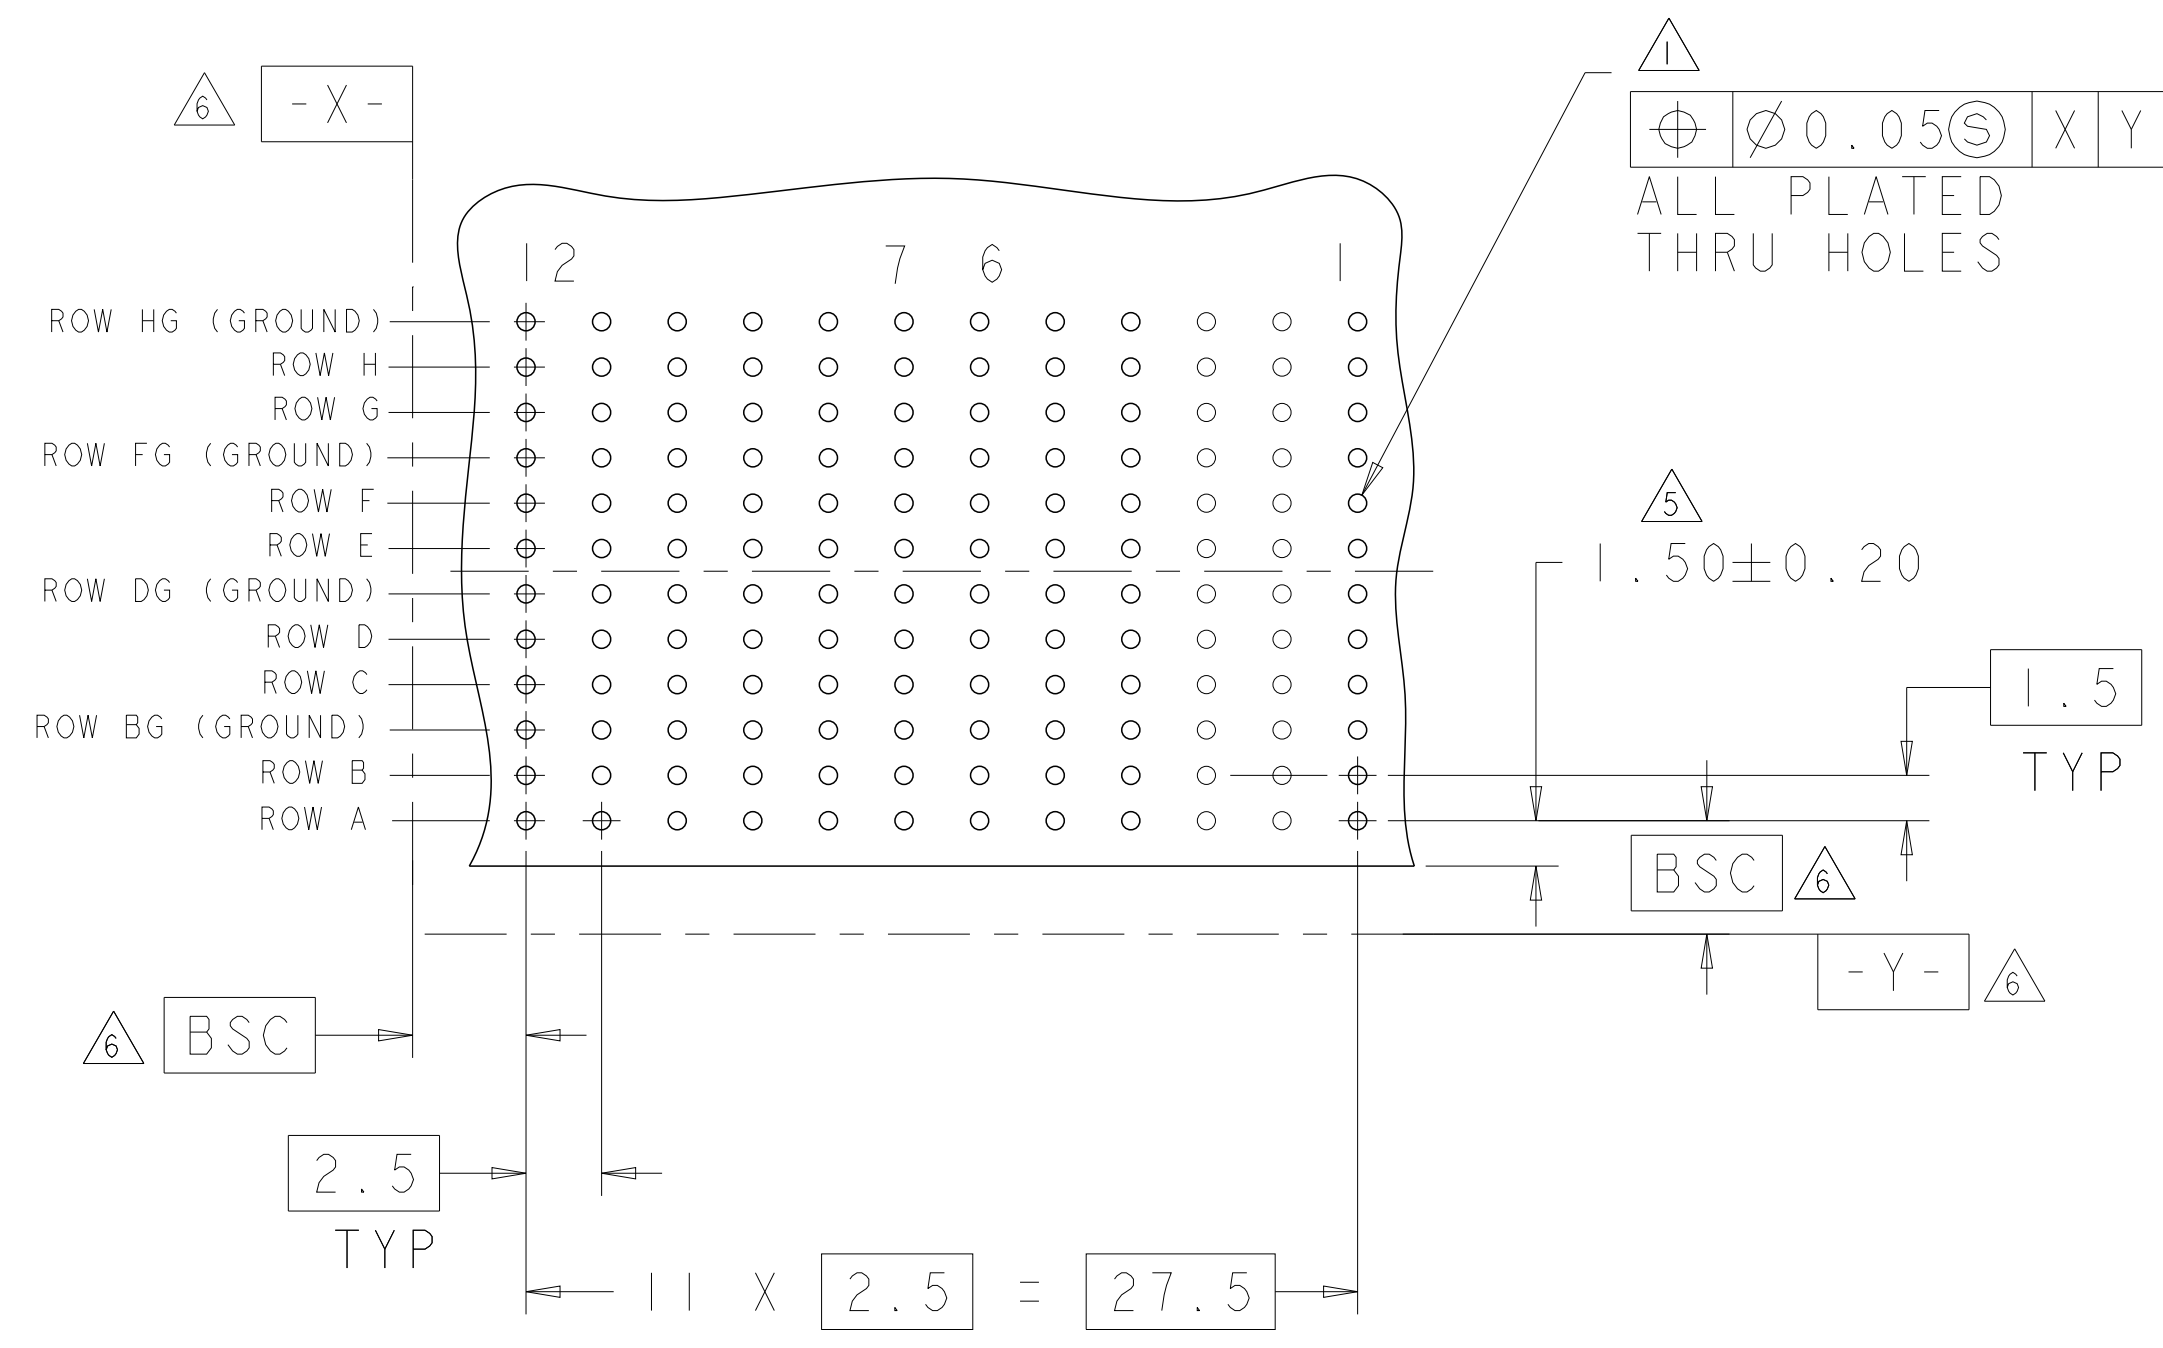
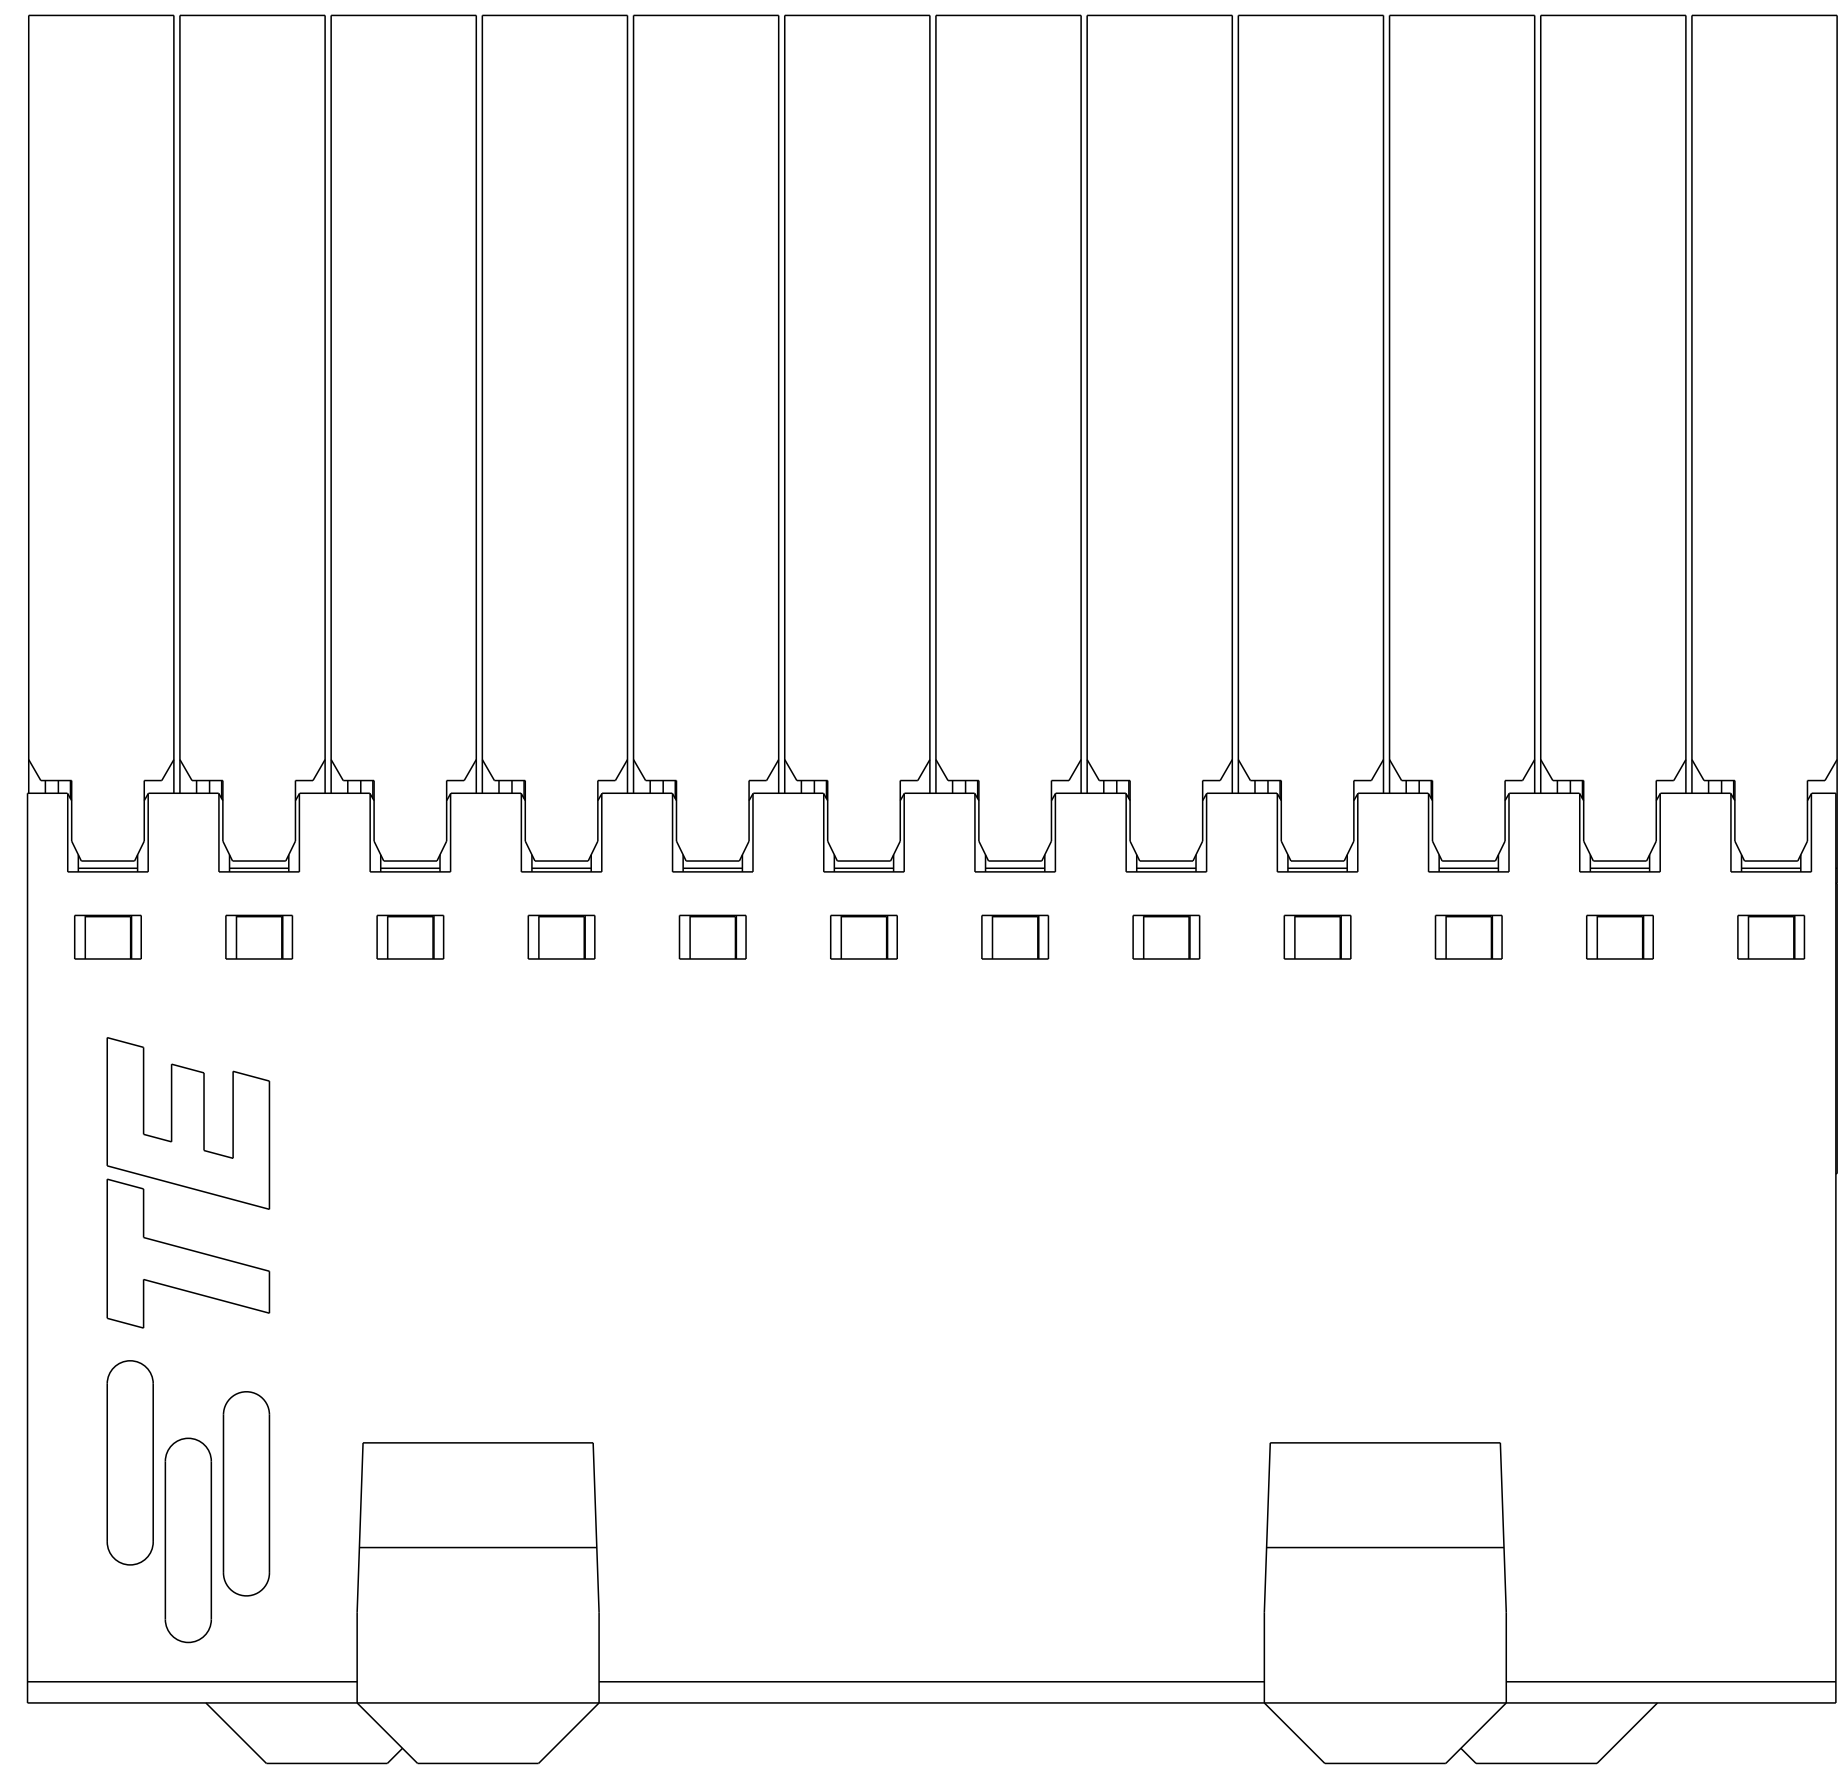


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
E		REVISED PER ECO-14-005095	21APR2014	AP RP
F		REVISED PER ECO-16-008845	21SEP2016	AP RP
G		REVISED PER ECO-17-013036	13SEP2017	AP RP

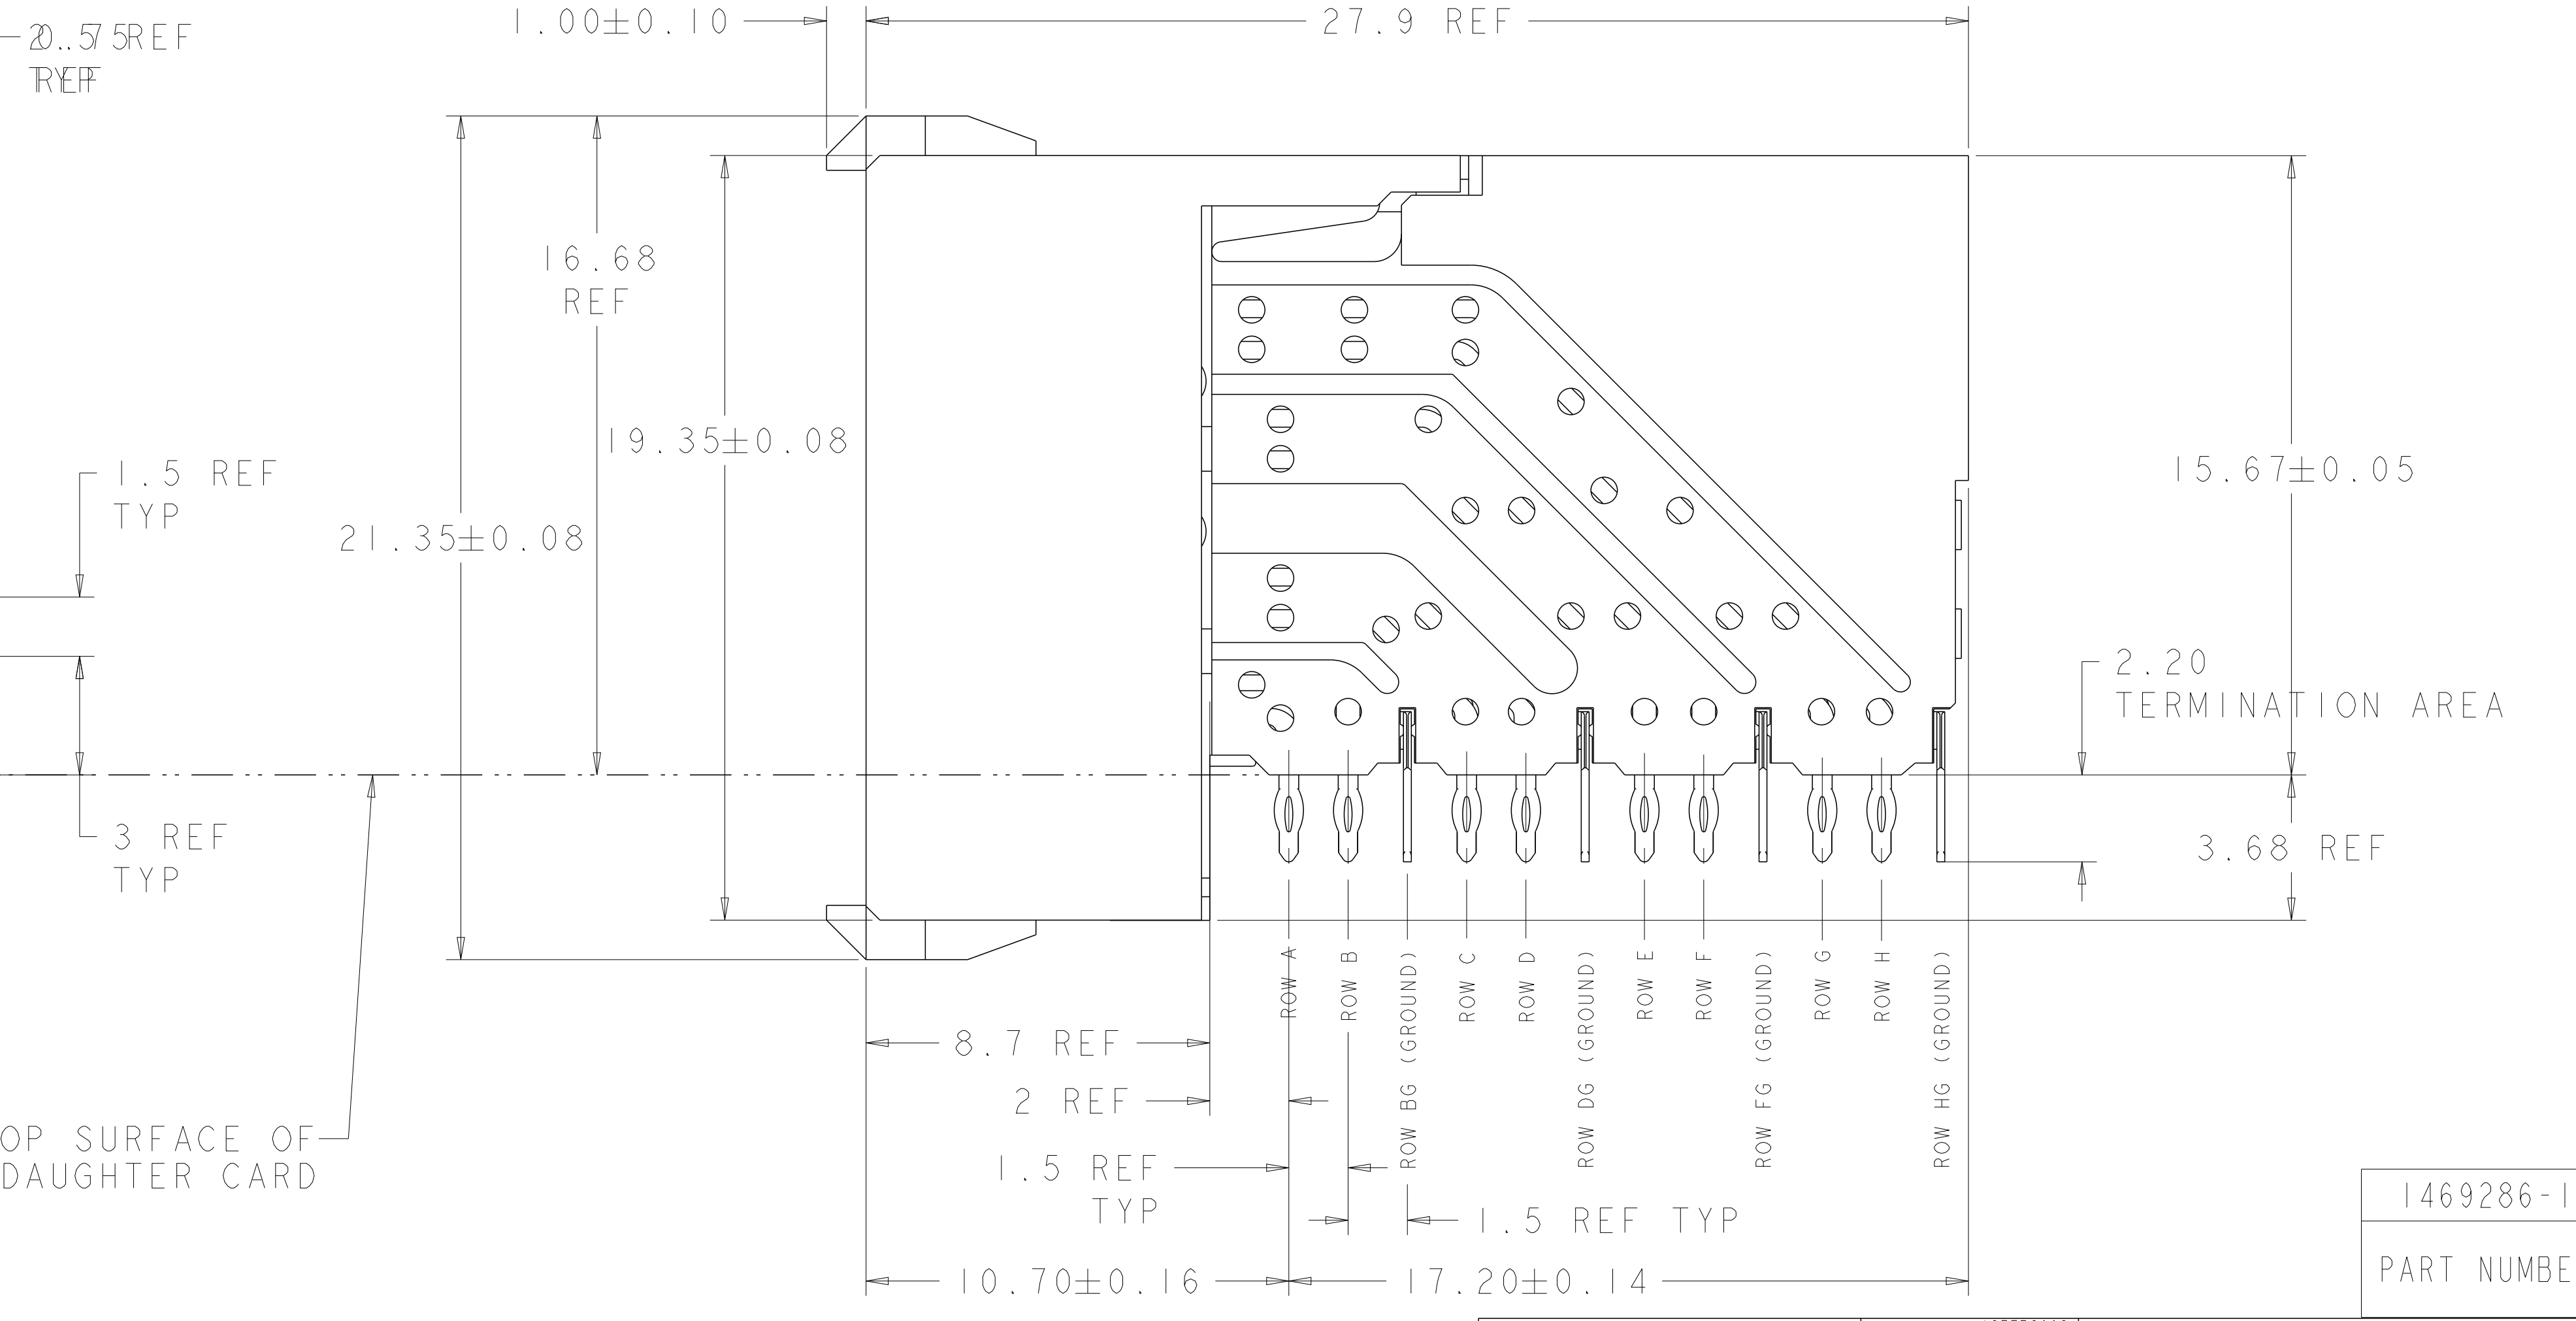


RECOMMENDED PC BOARD LAYOUT,  
 DAUGHTER BOARD,  
 COMPONENT SIDE SHOWN  
 SCALE 4:1

- 1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 2 MATERIAL:  
 SHIELD - PHOSPHOR BRONZE  
 CONTACT - COPPER-NICKEL-SILICON  
 HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0.
- 3 FINISH: SIGNAL AND GROUND CONTACTS:  
 MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS  
 COMPLIANT PIN AREA: 0.5µm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

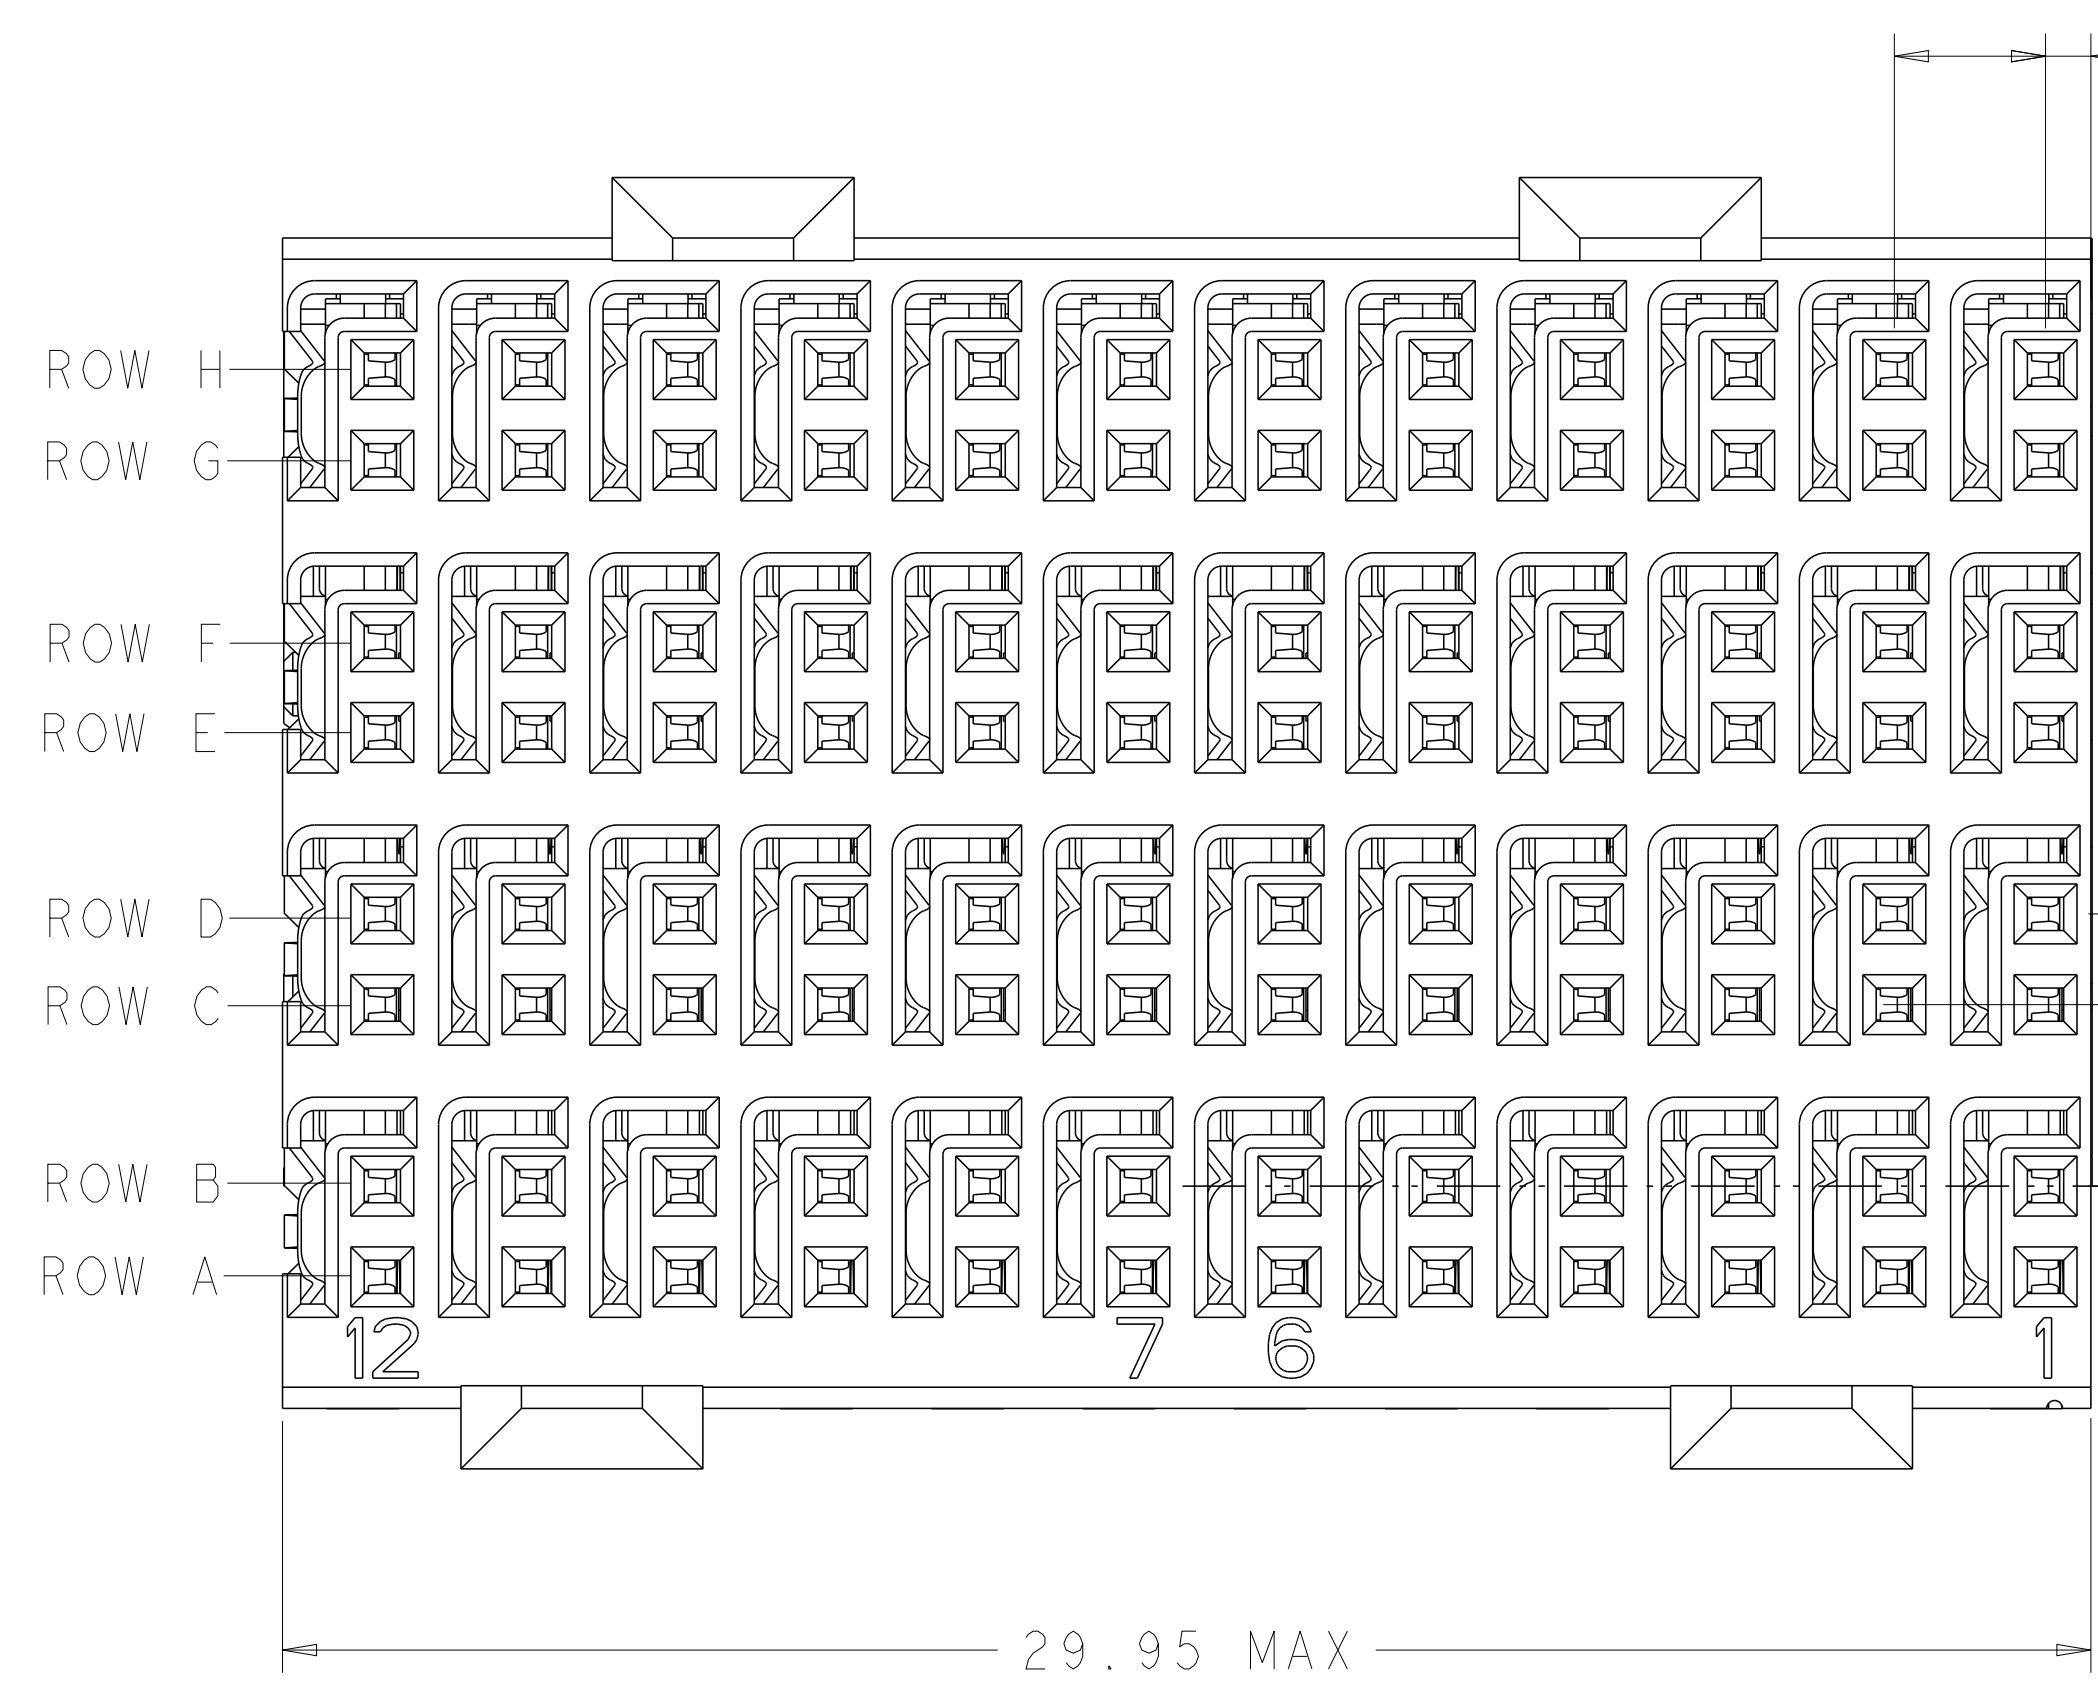

TOP SURFACE OF DAUGHTER CARD

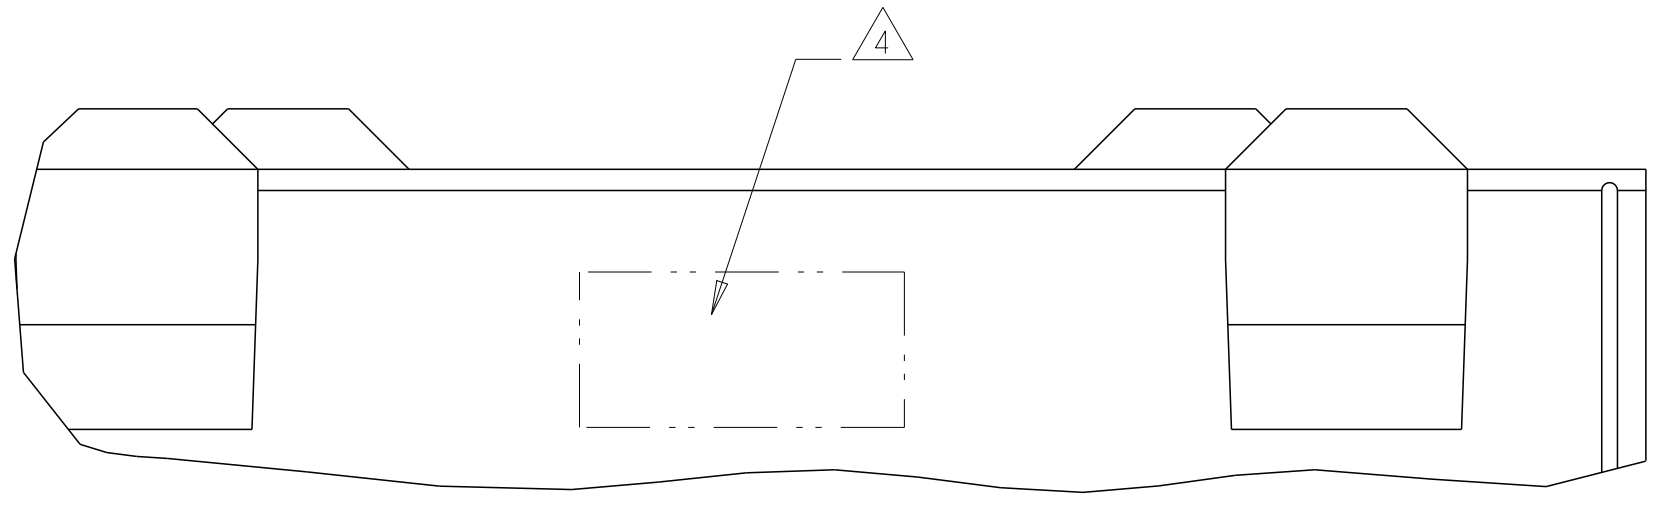

1469286-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: S. J. MAGARO 13FEB2003	TE Connectivity	
DIMENSIONS: mm		CHK: R. A. PATTERSON 13FEB2003	NAME: RECEPTACLE ASSEMBLY, 4 PAIR, 30mm, HMZd	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: H. PATTERSON 06MAY2007	SIZE: A100779	
0 PLC	±0.15	PRODUCT SPEC	CAGE CODE	DRAWING NO
1 PLC	±0.25	APPLICATION SPEC	1469286	1469286
2 PLC	±0.38	WEIGHT	SCALE	8:1
3 PLC	±0.51	CUSTOMER DRAWING	SHEET	1 OF 1
4 PLC	±0.76		REV	G
ANGLES	±0.15			
FINISH	±0.15			