

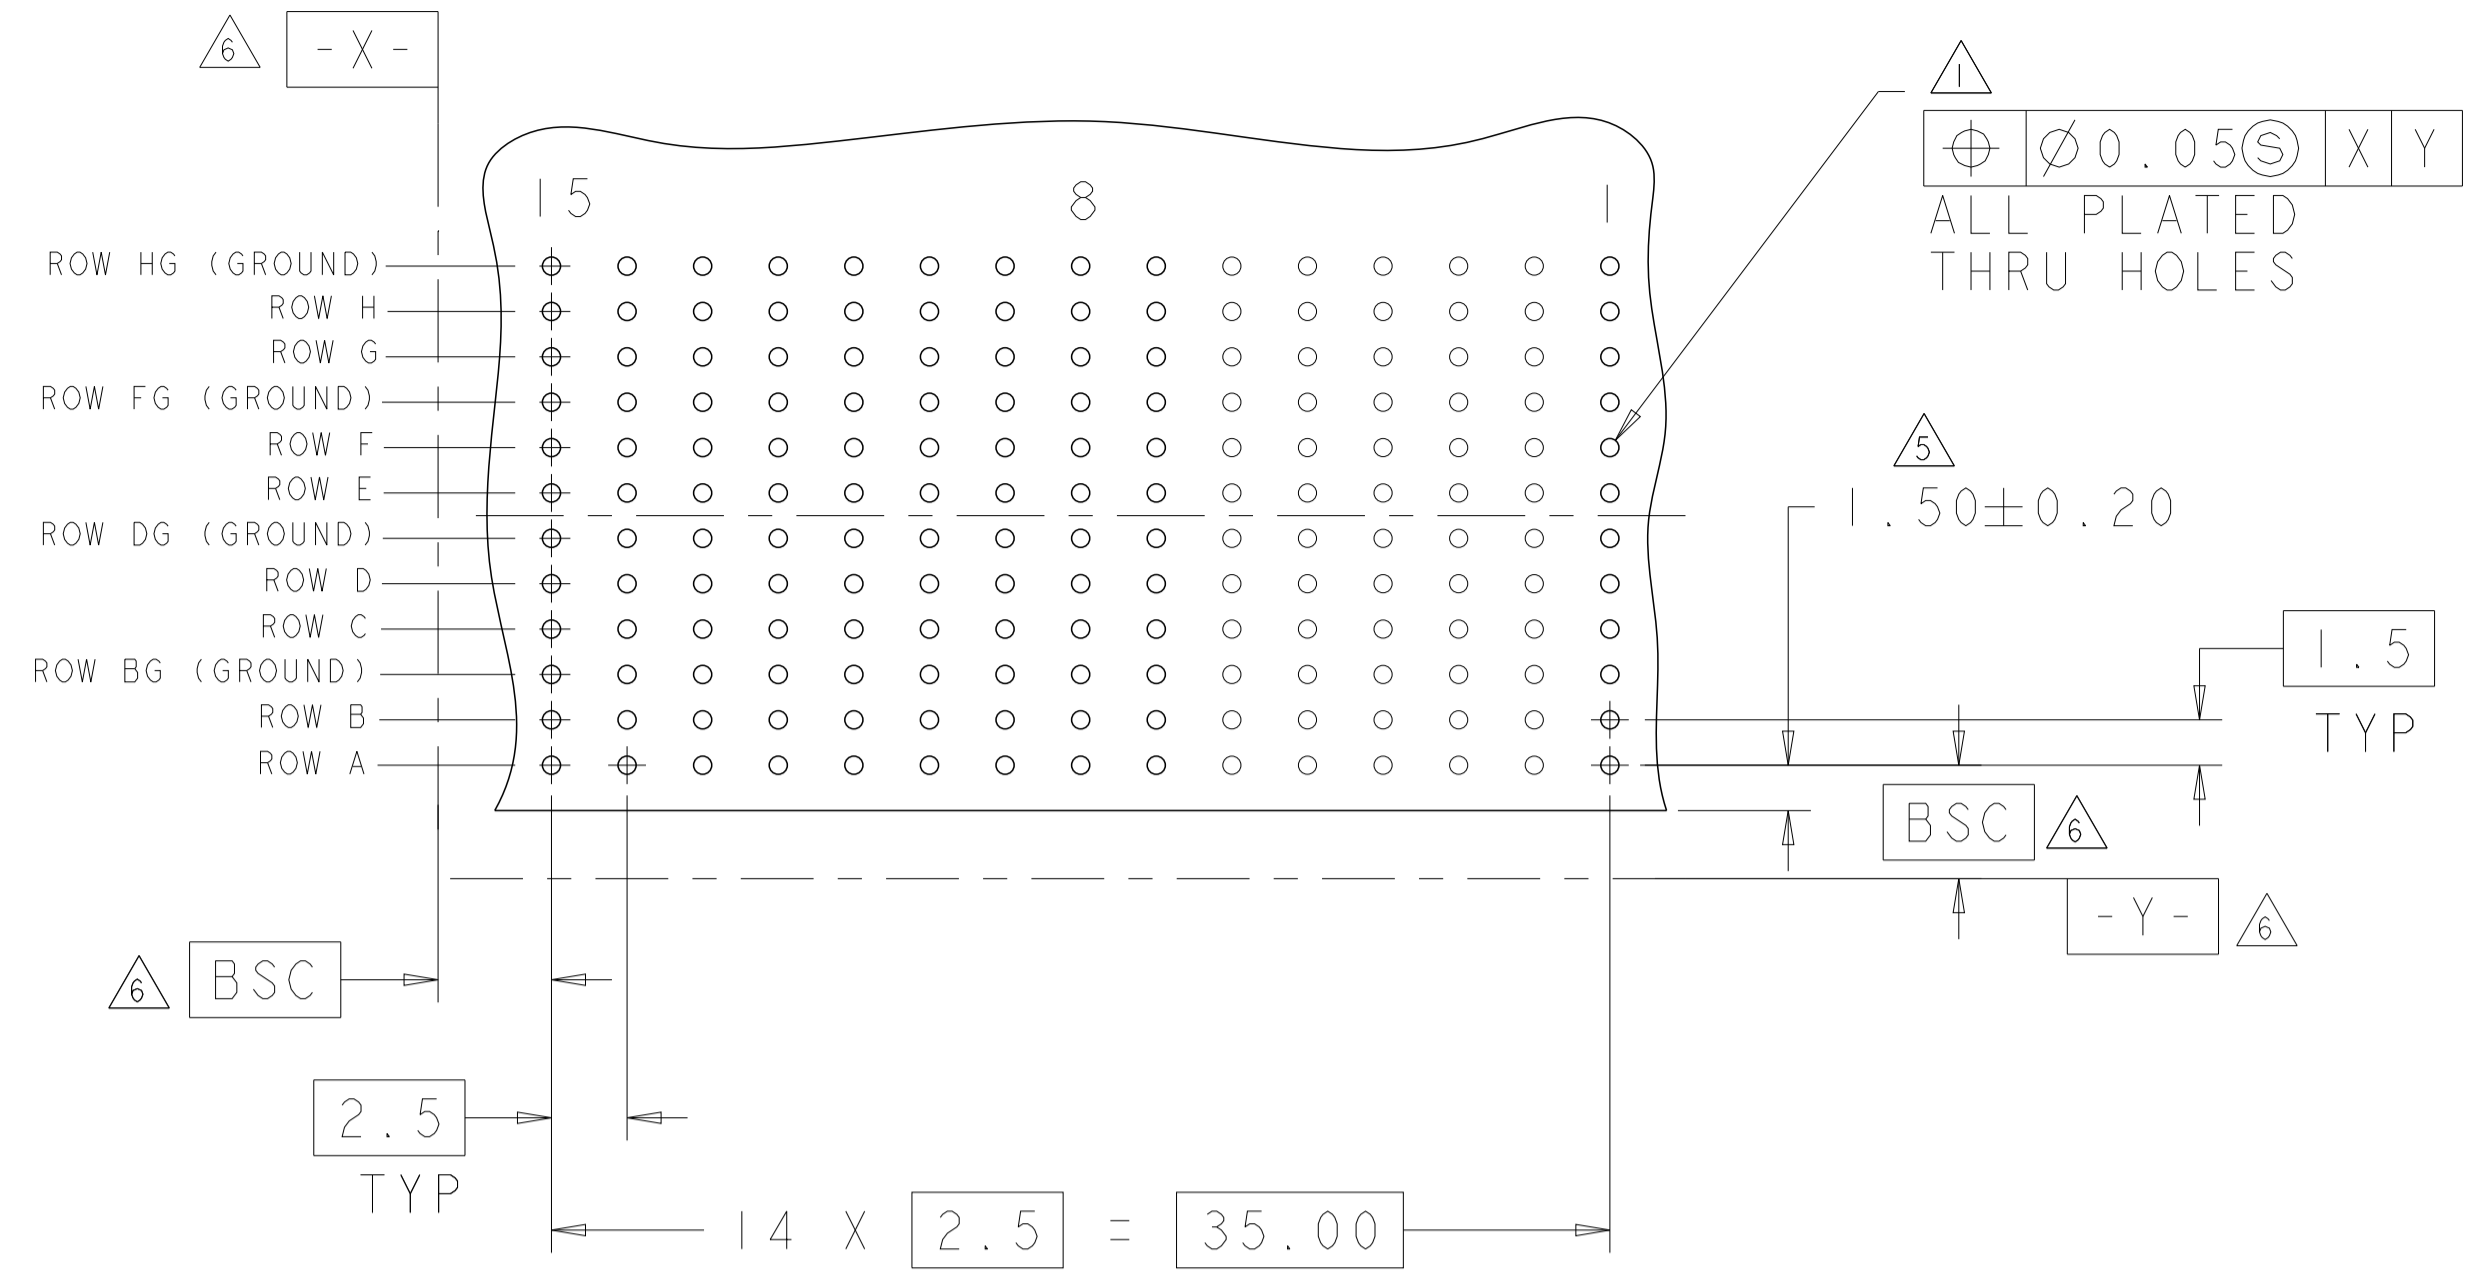


REVISIONS				
P	LTN	DESCRIPTION	DATE	APVD
E		REVISED PER ECO-14-005095	21APR2014	AP RP
F		REVISED PER ECO-16-008845	21SEP2016	AP RP
G		REVISED PER ECO-17-013036	13SEP2017	AP RP

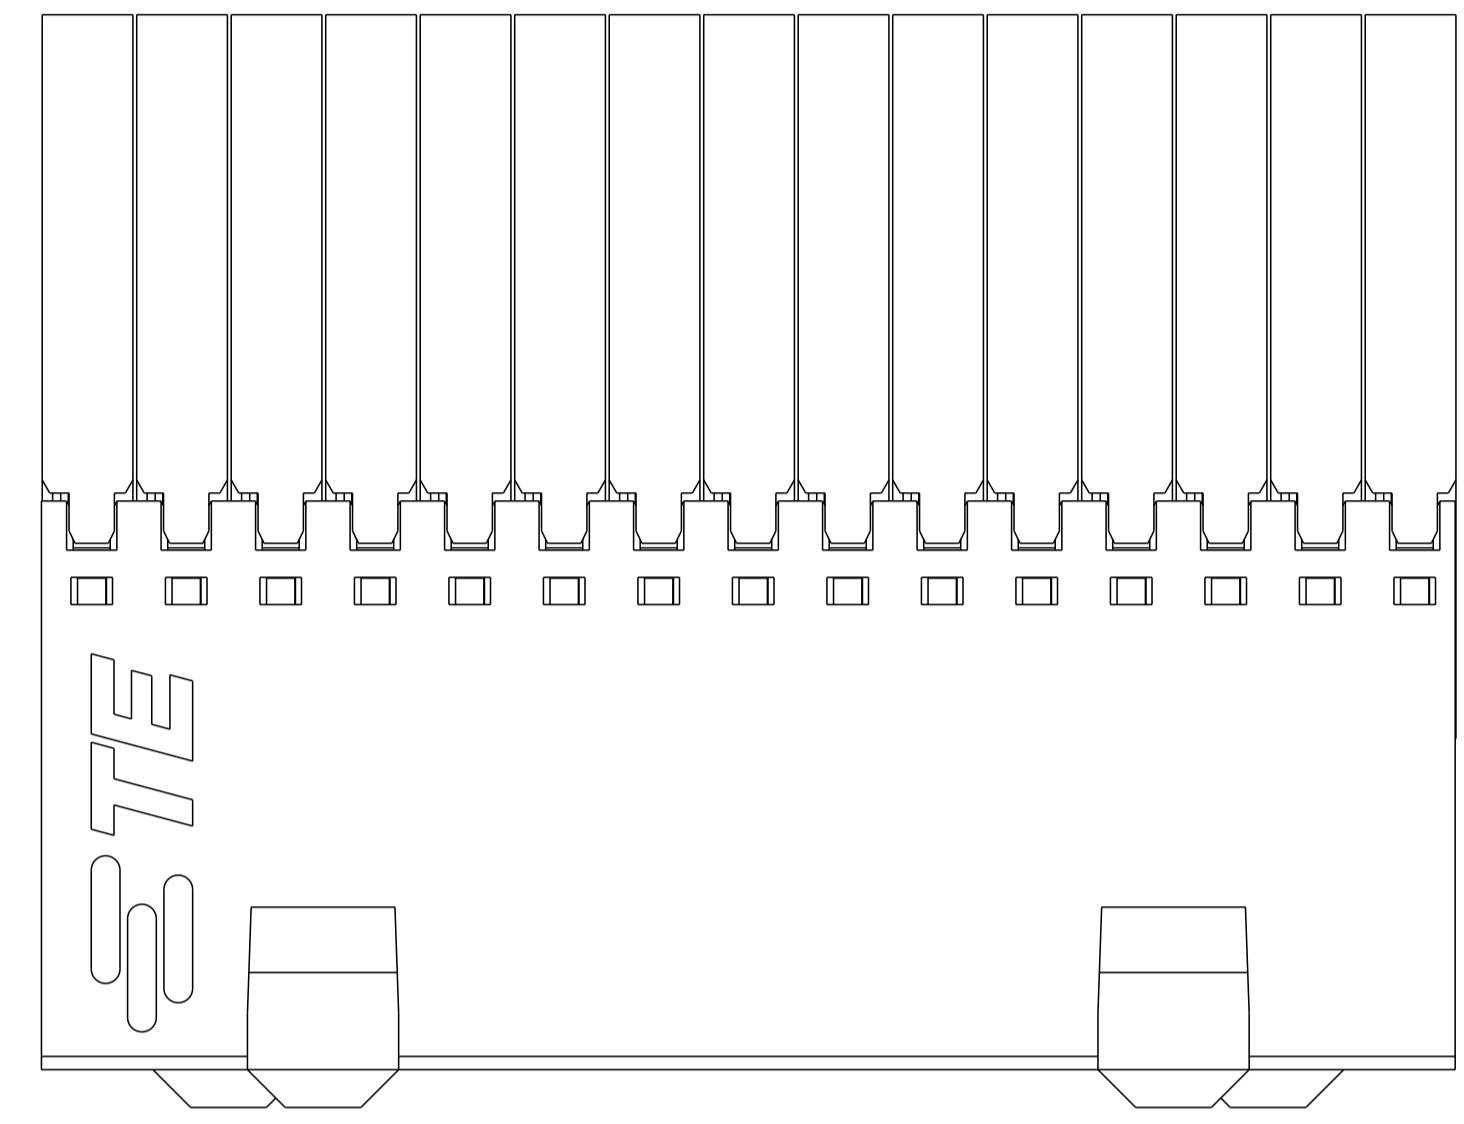


- 1 REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 2 MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER - GLASS FILLED POLYESTER, UL 94V-0.
- 3 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 µm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- 4 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- 5 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- 6 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT, DAUGHTER BOARD, COMPONENT SIDE SHOWN
 SCALE 4:1

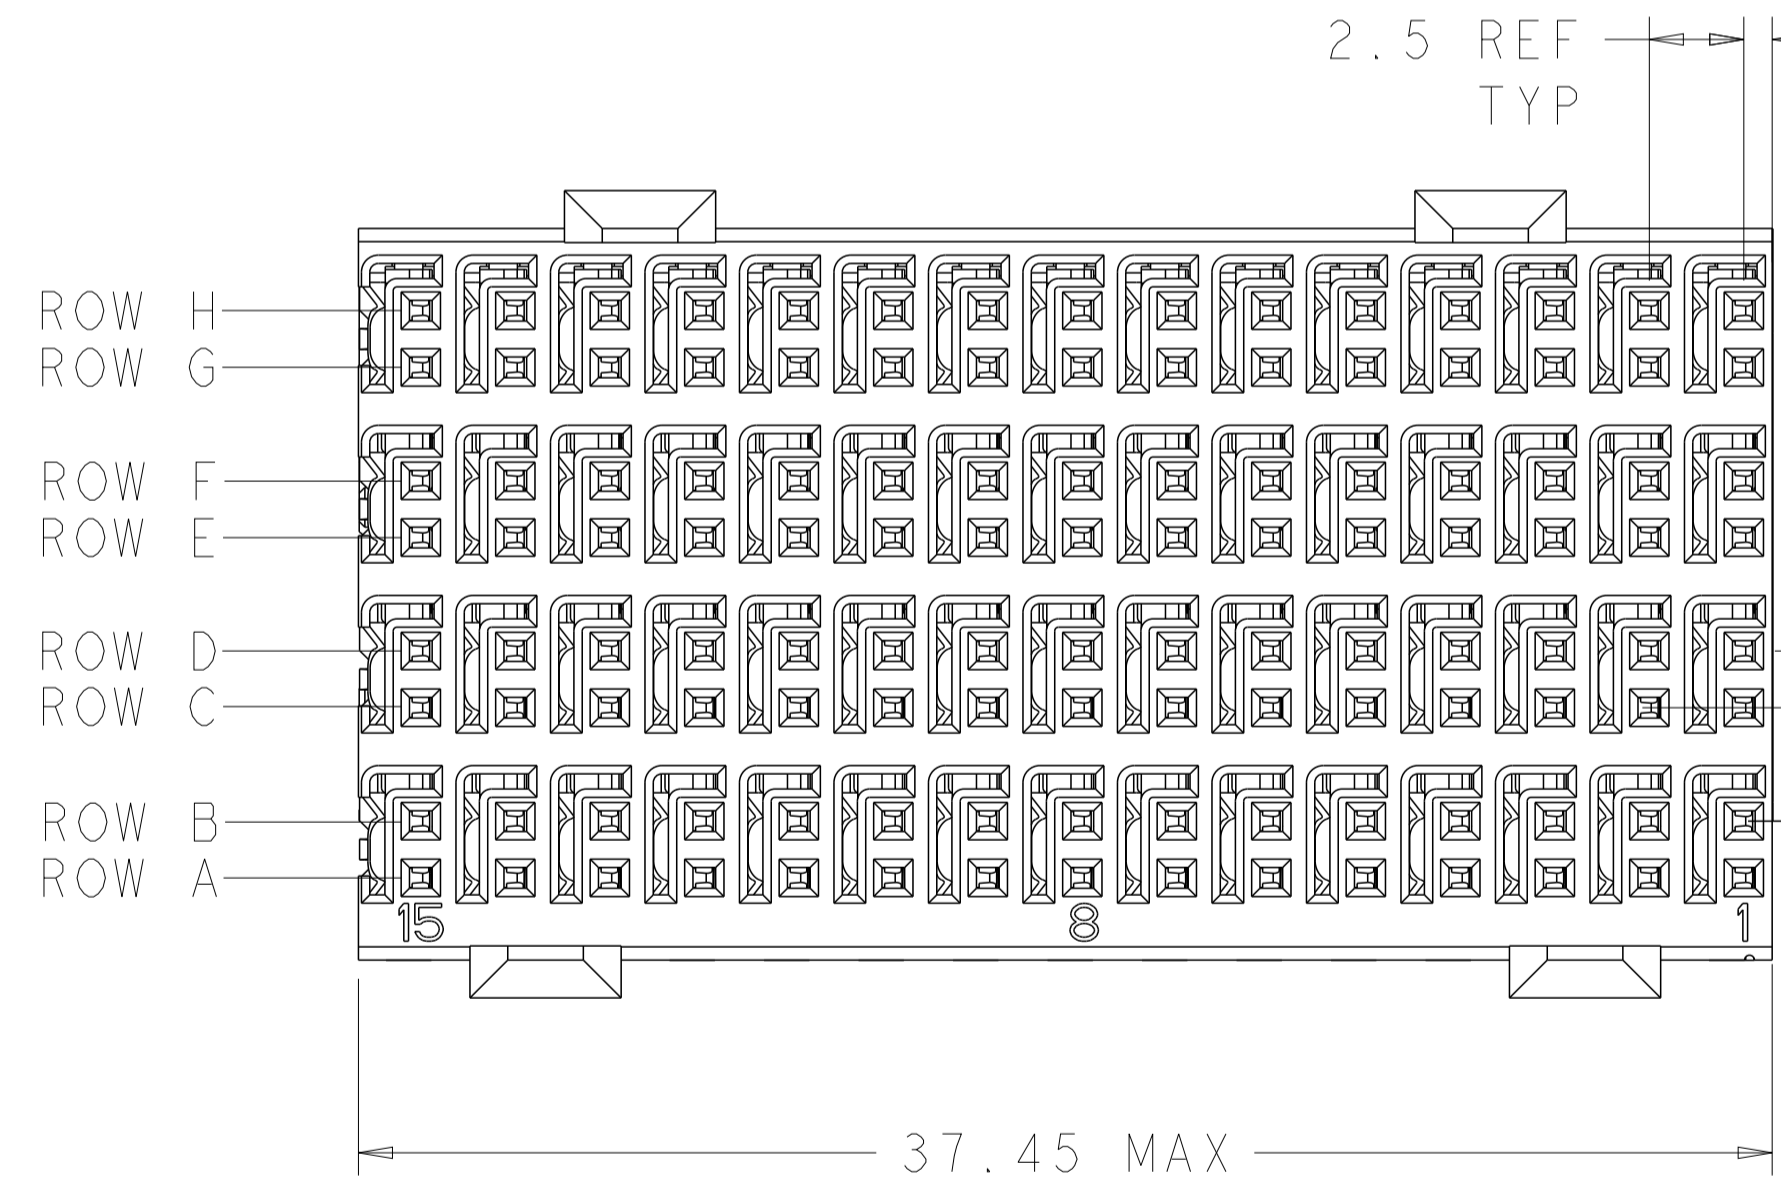

TOP SURFACE OF DAUGHTER CARD

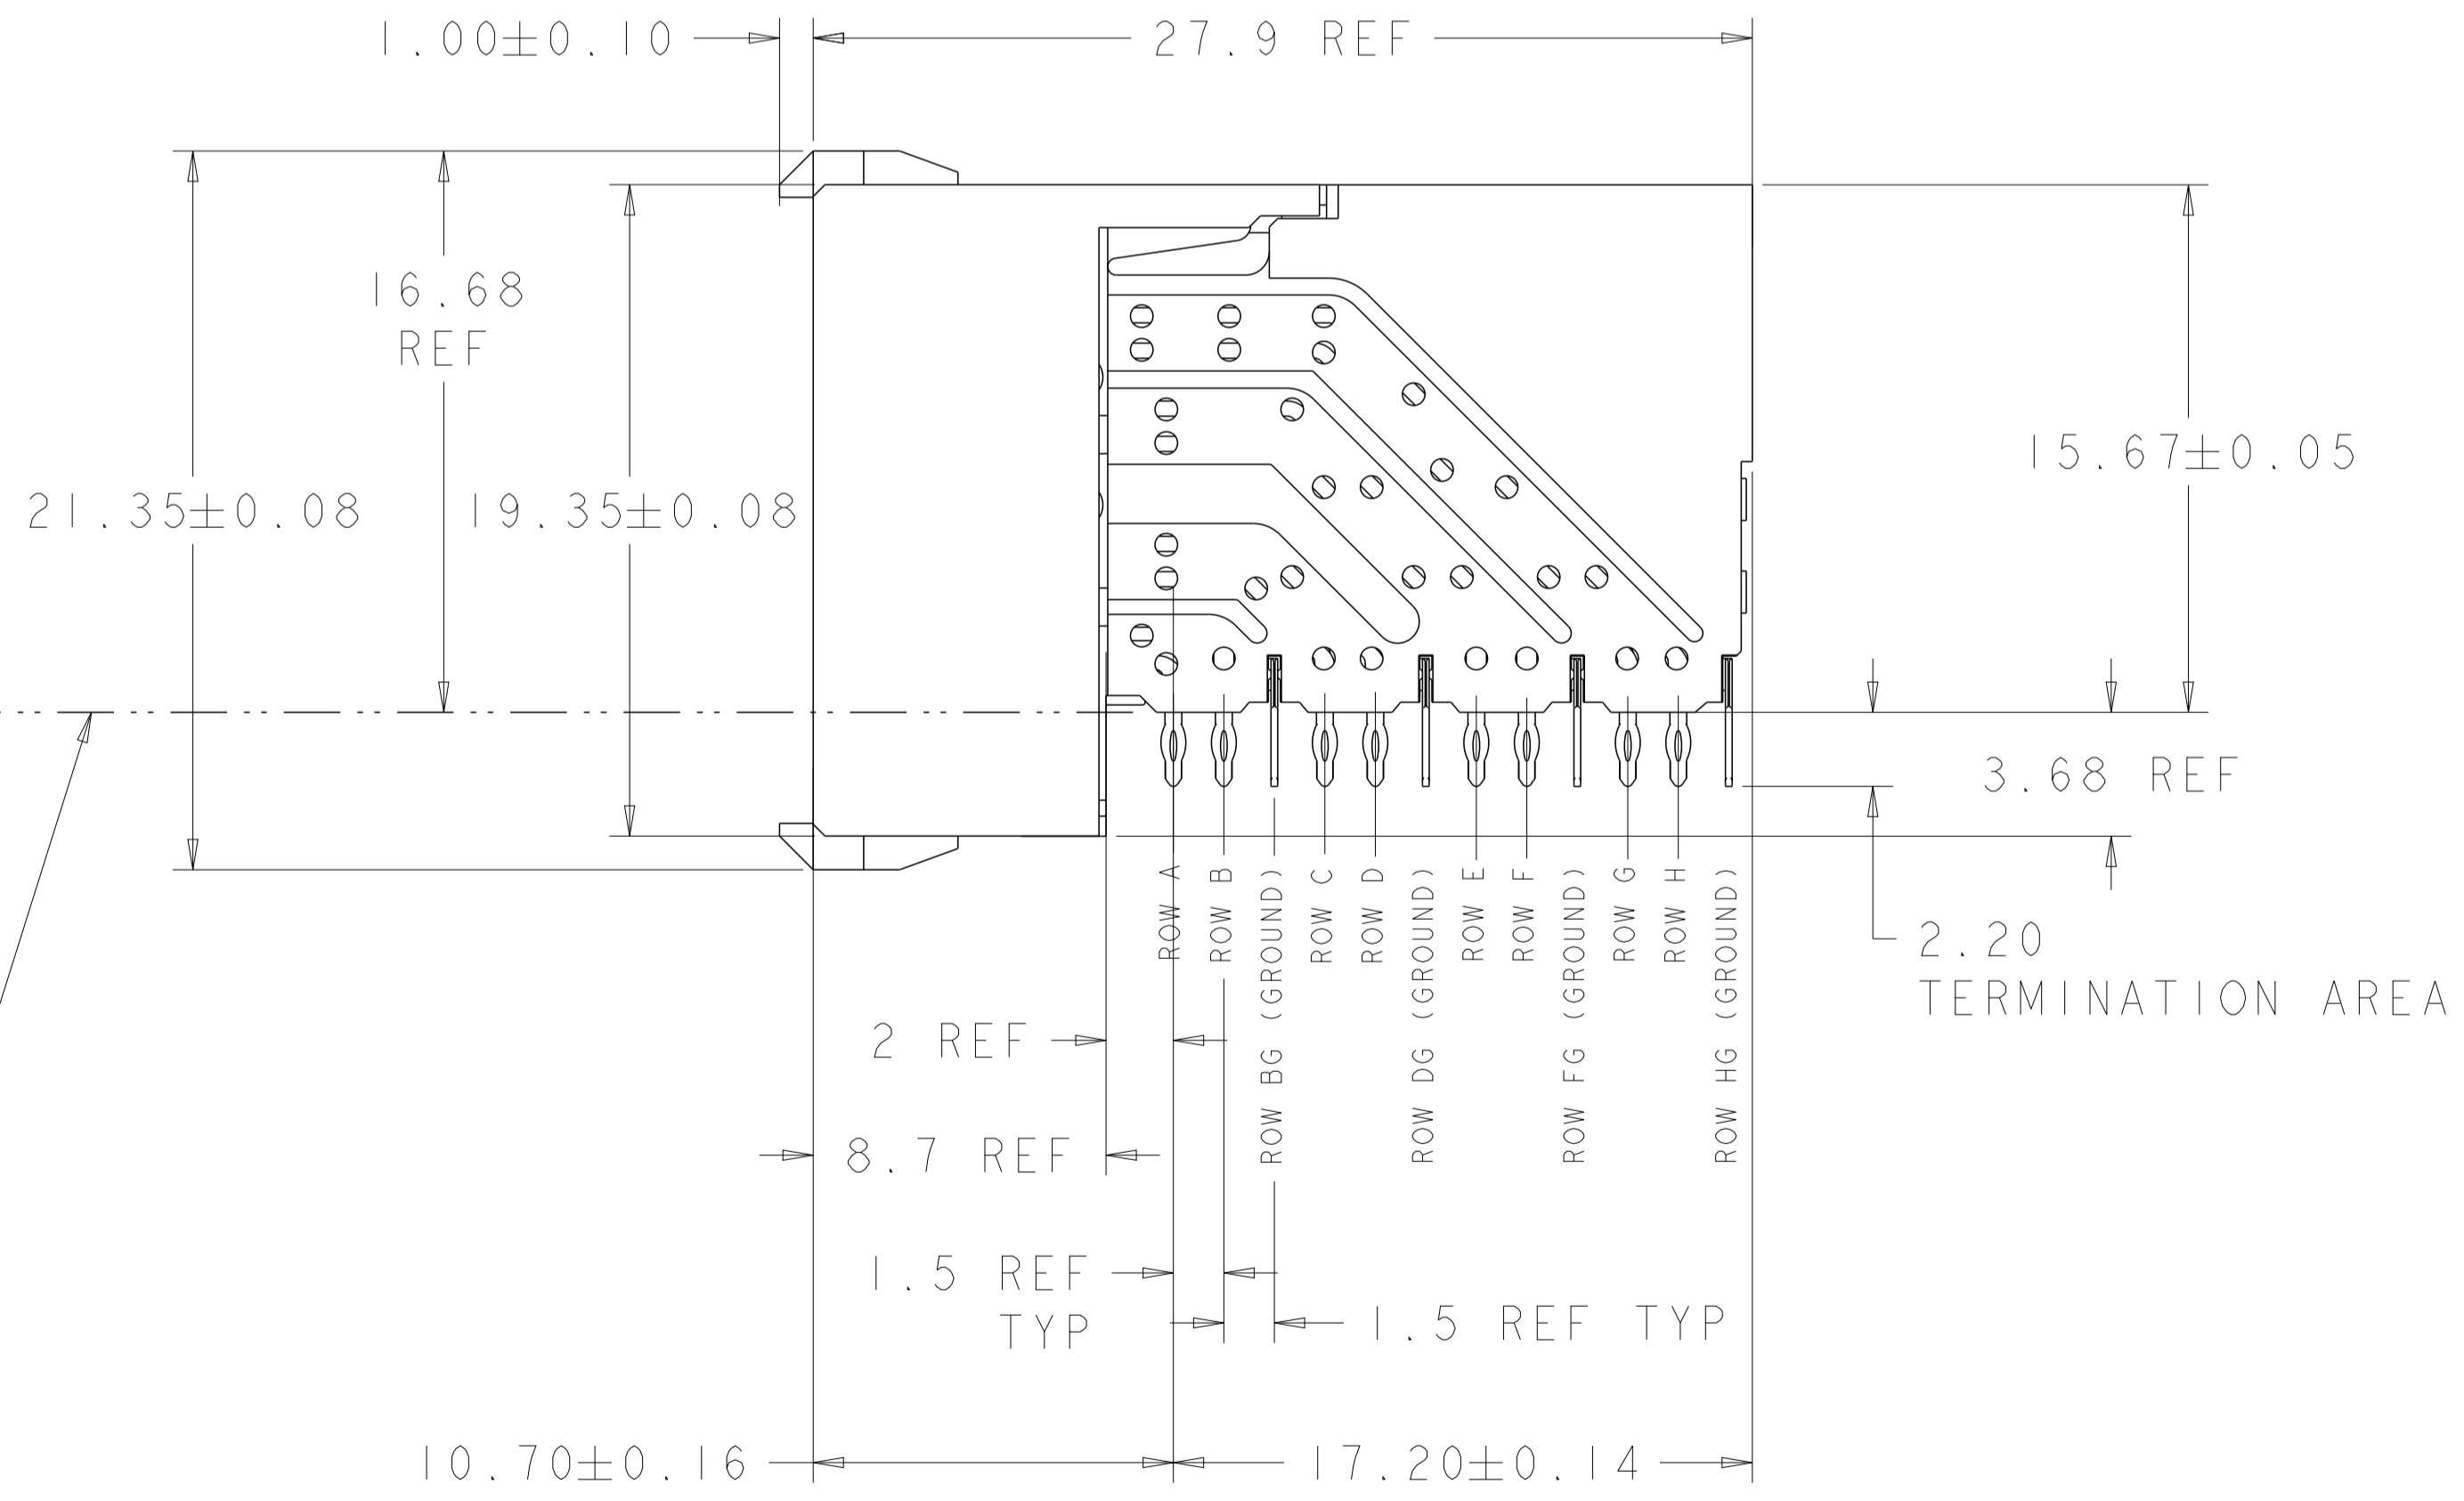

1469294-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: S. J. MAGARO 25MAR2003	STE Connectivity	
DIMENSIONS:		CHK: R. A. PATTERSON 25MAR2003	NAME: RECEPTACLE ASSEMBLY, 4 PAIR, 37.5mm HMZd	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: R. A. PATTERSON 19MAY2003	PRODUCT SPEC	
mm		APPLICATION SPEC		
0 PLC	±	SIZE: A100779C=1469294		
1 PLC	±	CAGE CODE: 1469294		
2 PLC	±	DRAWING NO: 1469294		
3 PLC	±	SHEET 1 OF 1		
4 PLC	±	REV G		
ANGLES	±	CUSTOMER DRAWING		
MATERIAL	FINISH	SCALE: 5:1		