
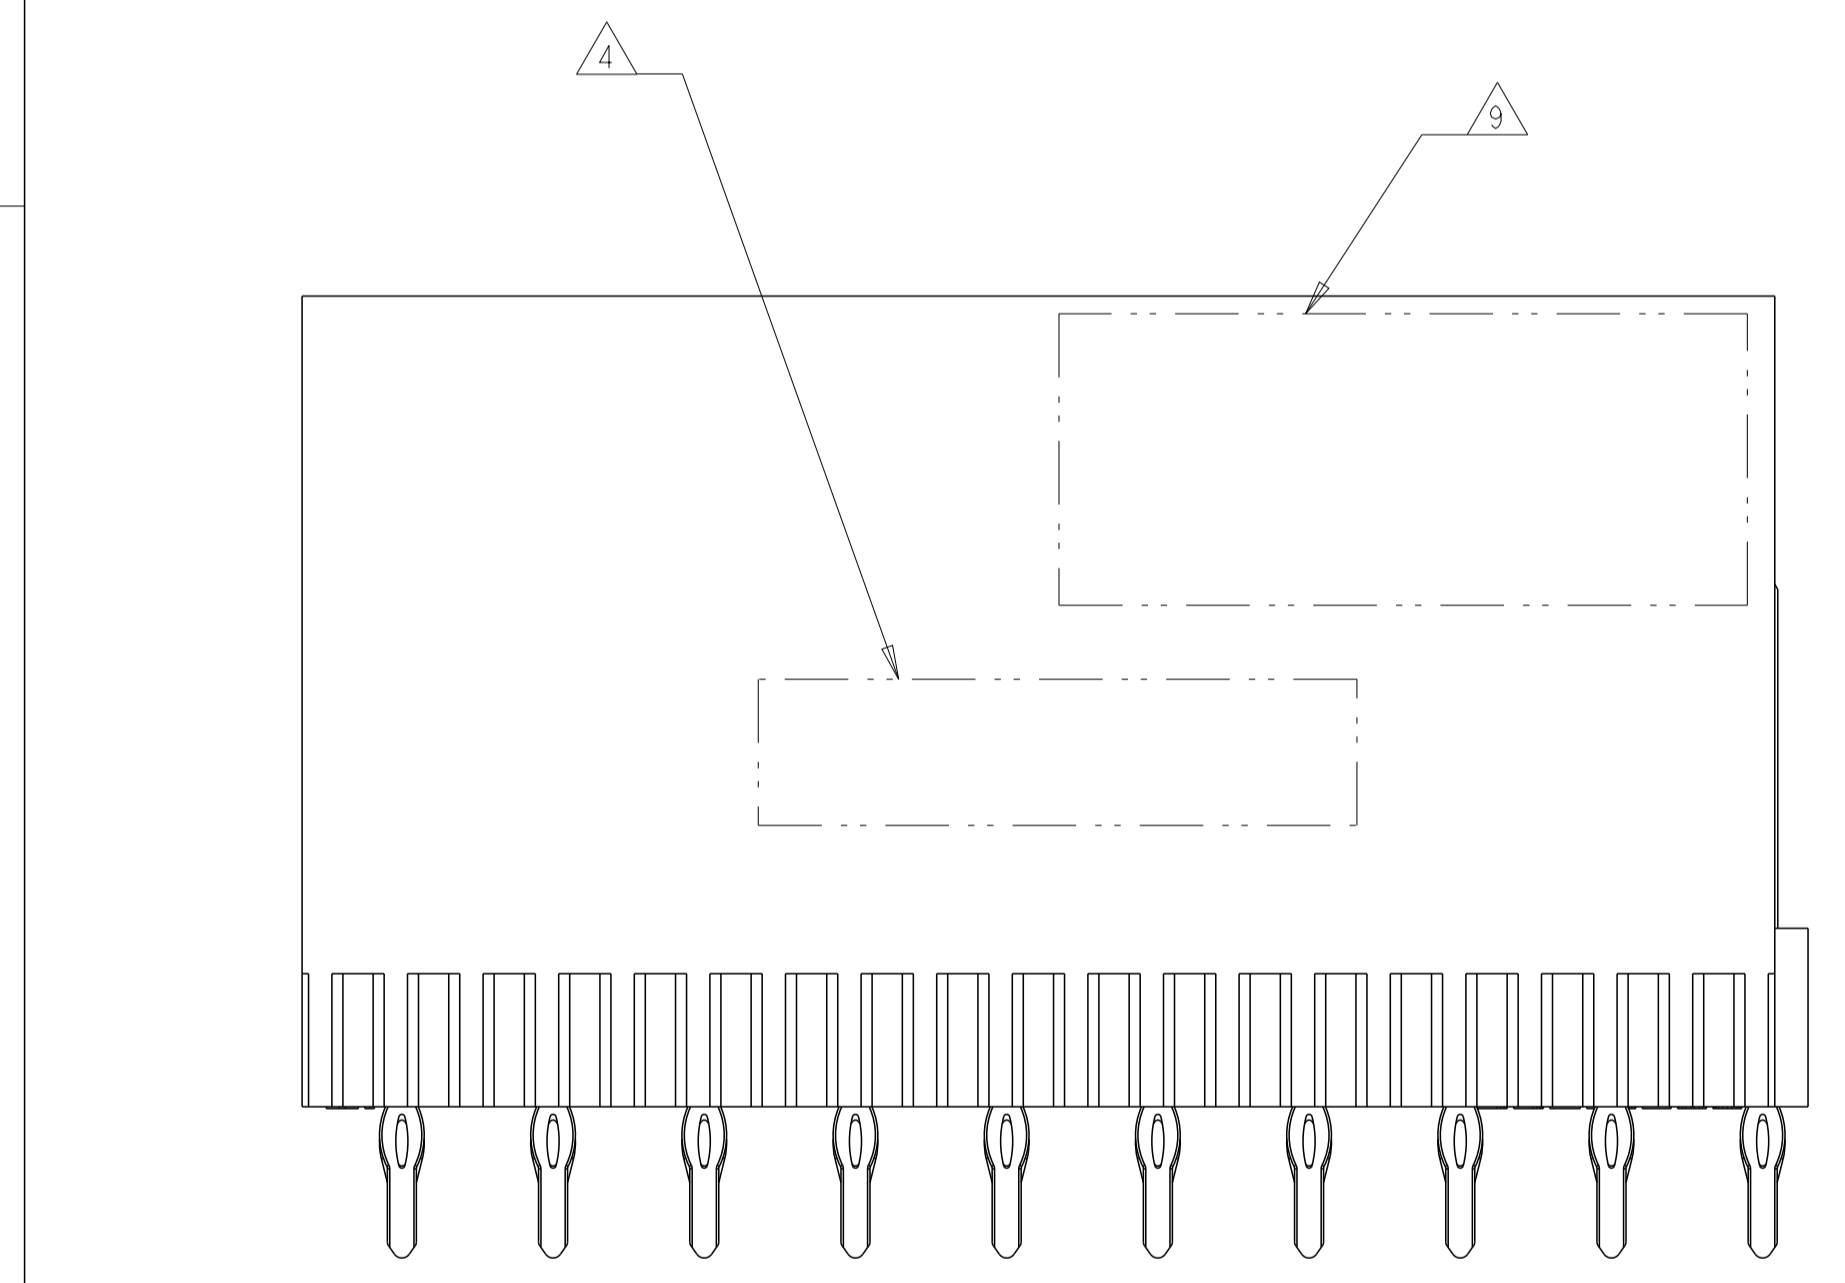
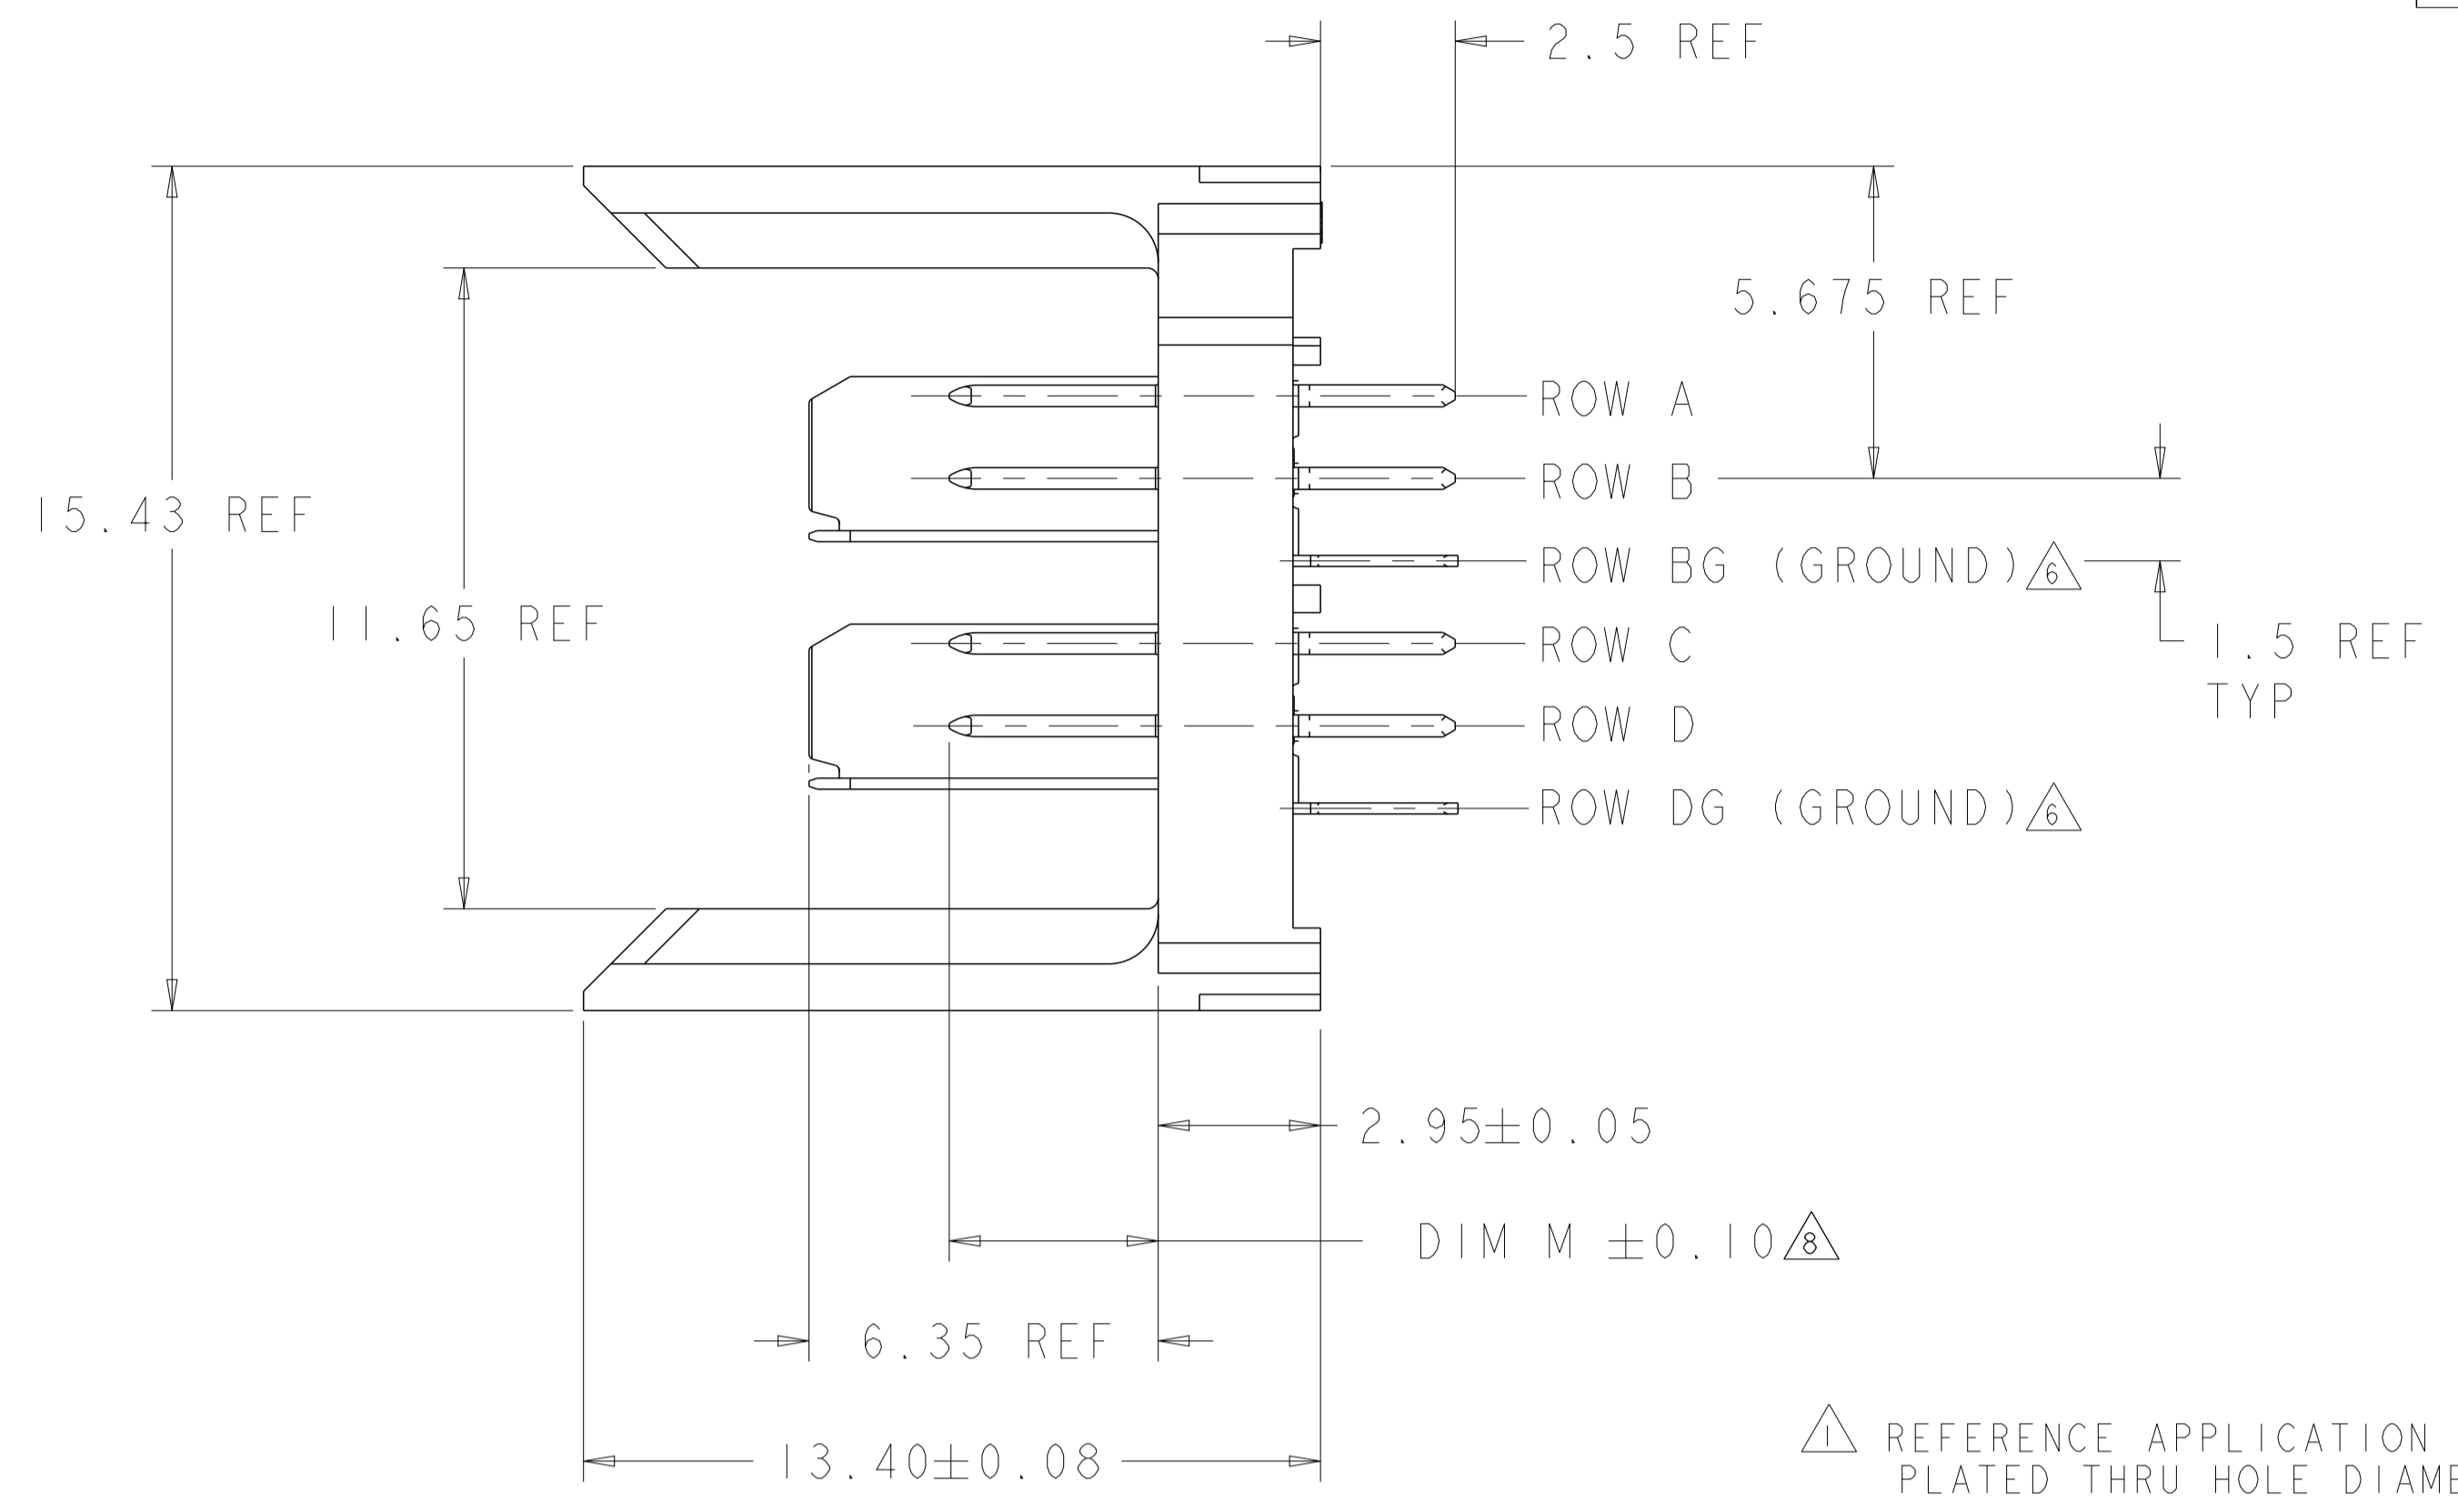


LOC		DIST		REVISIONS				
P	LTN	DESCRIPTION	DATE	DMN	APVD			
C		REVISED PER ECO-12-000118	17JAN12	KH	DY			
D		REVISED PER ECO-18-018129	25SEP2019	AP	DS			

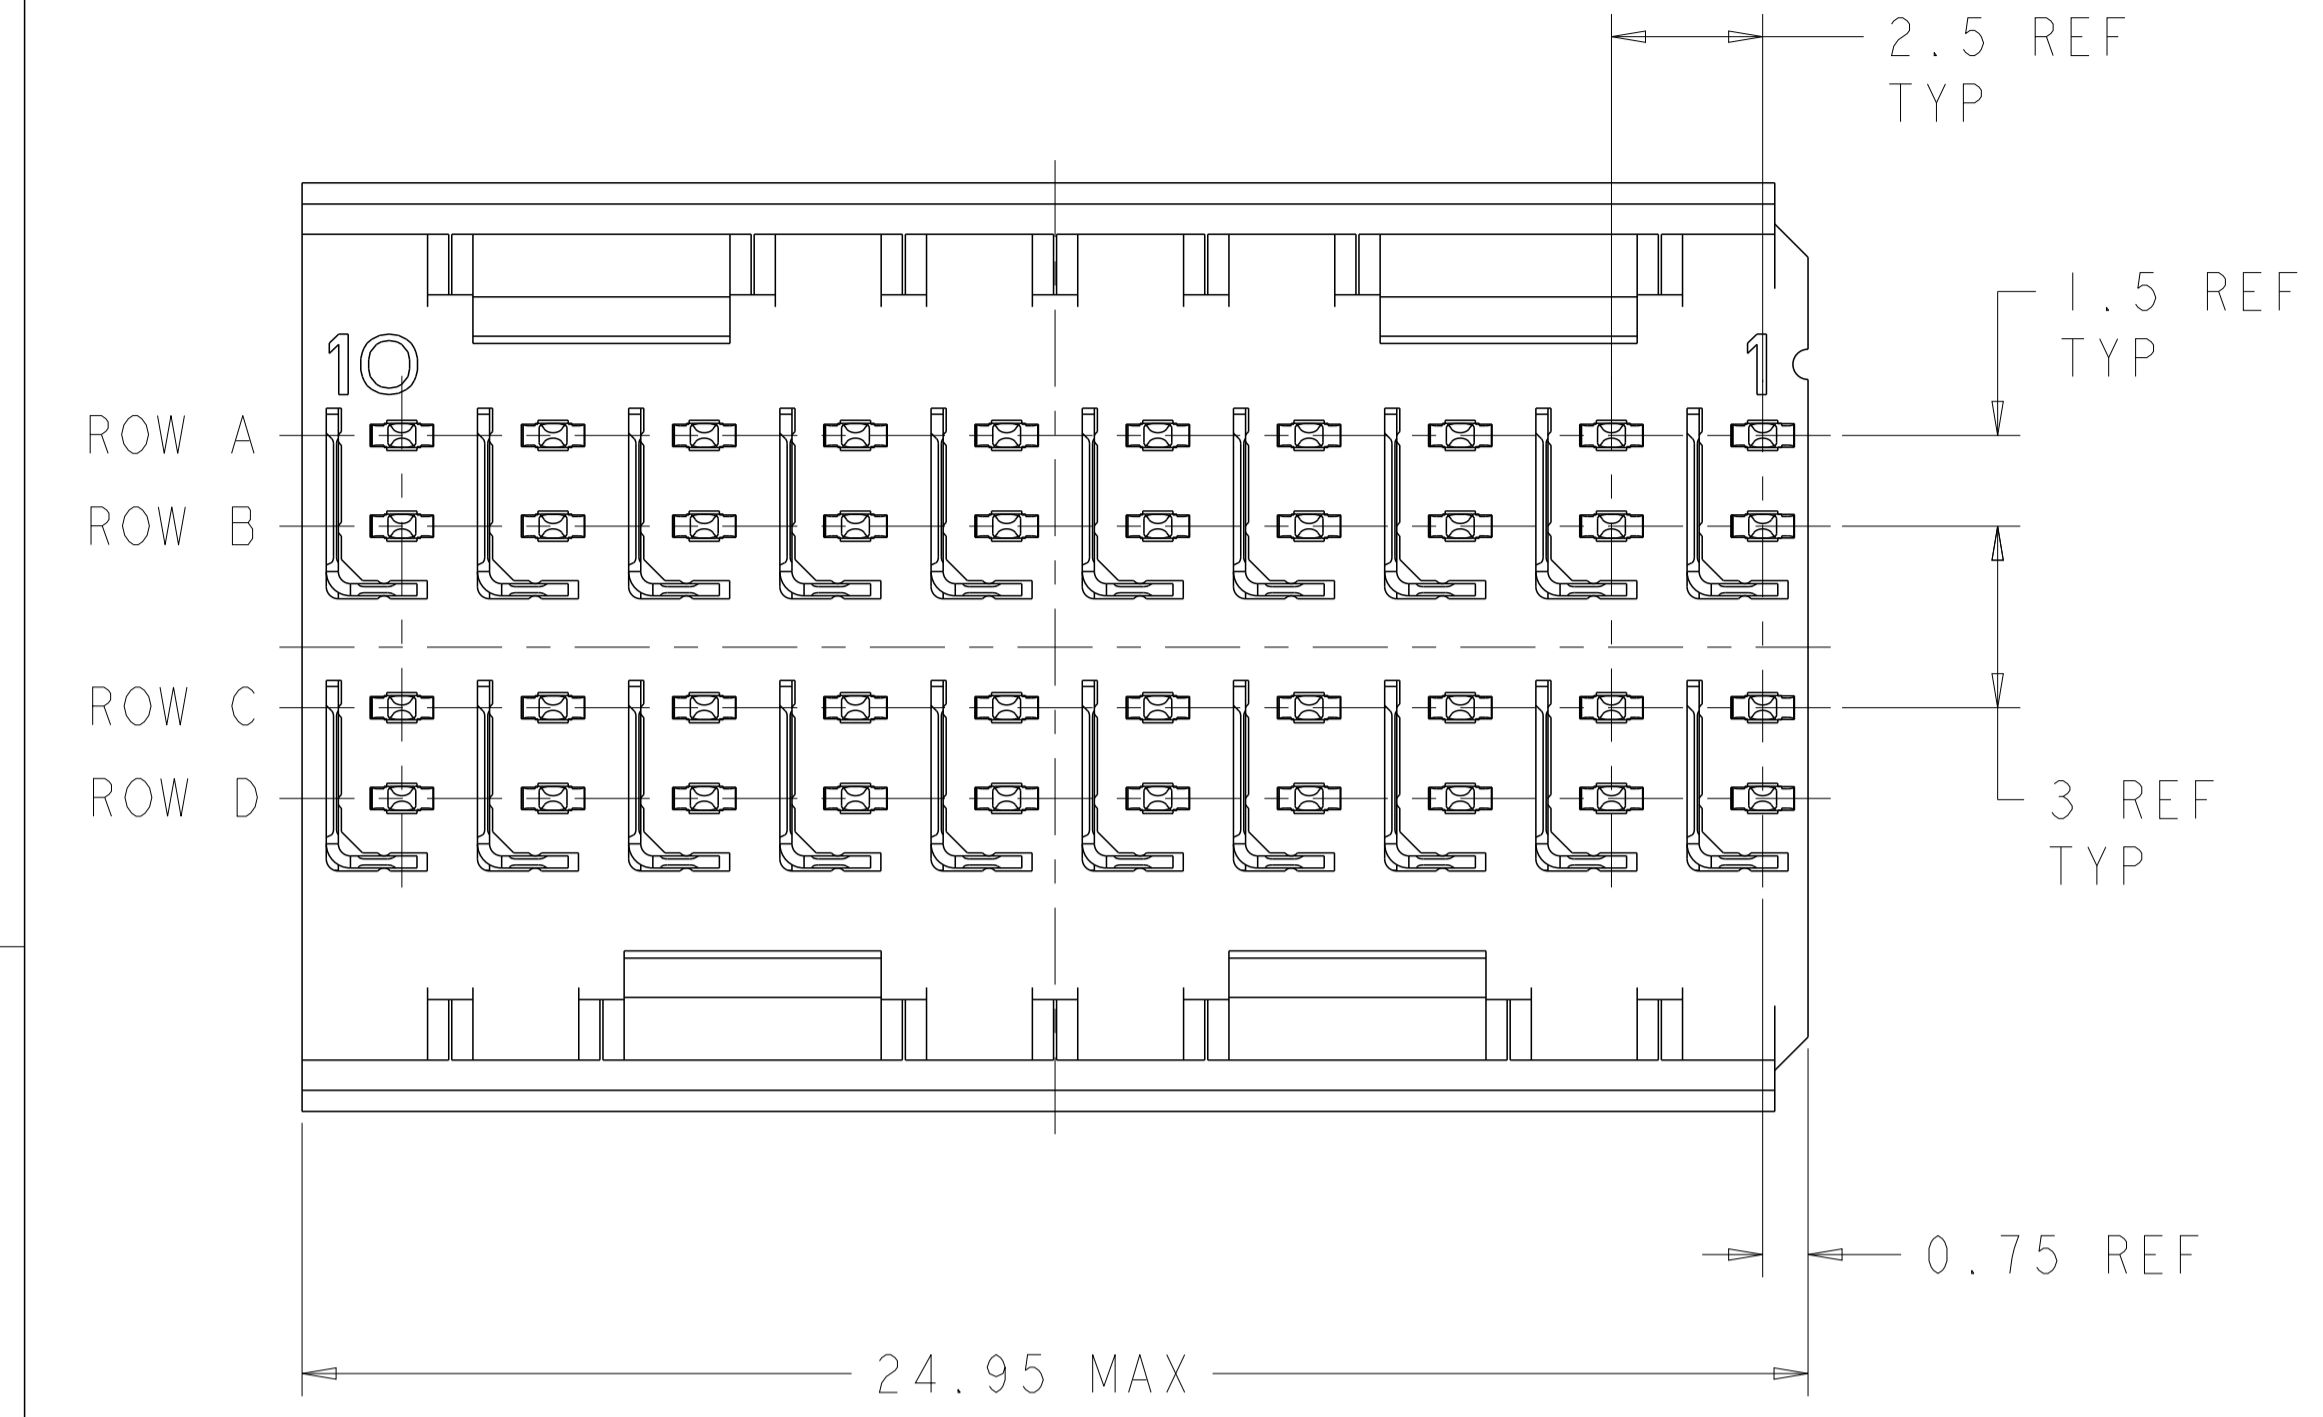


- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ MATERIAL:
CONTACT AND SHIELD - PHOSPHOR BRONZE
HOUSING - GLASS FILLED POLYESTER. UL 94V-0.
- △ FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ THE TWO GROUNDS IN EACH COLUMN ARE COMMONED.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ REFER TO "CONTACT LAYOUT" CHART FOR SEQUENCING.
- △ TE OR TE CONNECTIVITY LOGO IS LOCATED.

CONTACT LAYOUT
 A = 3.80mm (DIM M)
 B = 5.30mm (DIM M)
 G = GROUND

		COLUMNS									
		10	9	8	7	6	5	4	3	2	1
ROWS	A	A	B	B	B	B	B	B	B	B	A
	B	A	B	B	B	B	B	B	B	B	A
	BG	G	G	G	G	G	G	G	G	G	G
	C	A	B	B	B	B	B	B	B	B	A
	D	A	B	B	B	B	B	B	B	B	A
DG	G	G	G	G	G	G	G	G	G	G	

⊕ ∅0.05Ⓢ X Y
 ALL PLATED THRU HOLES

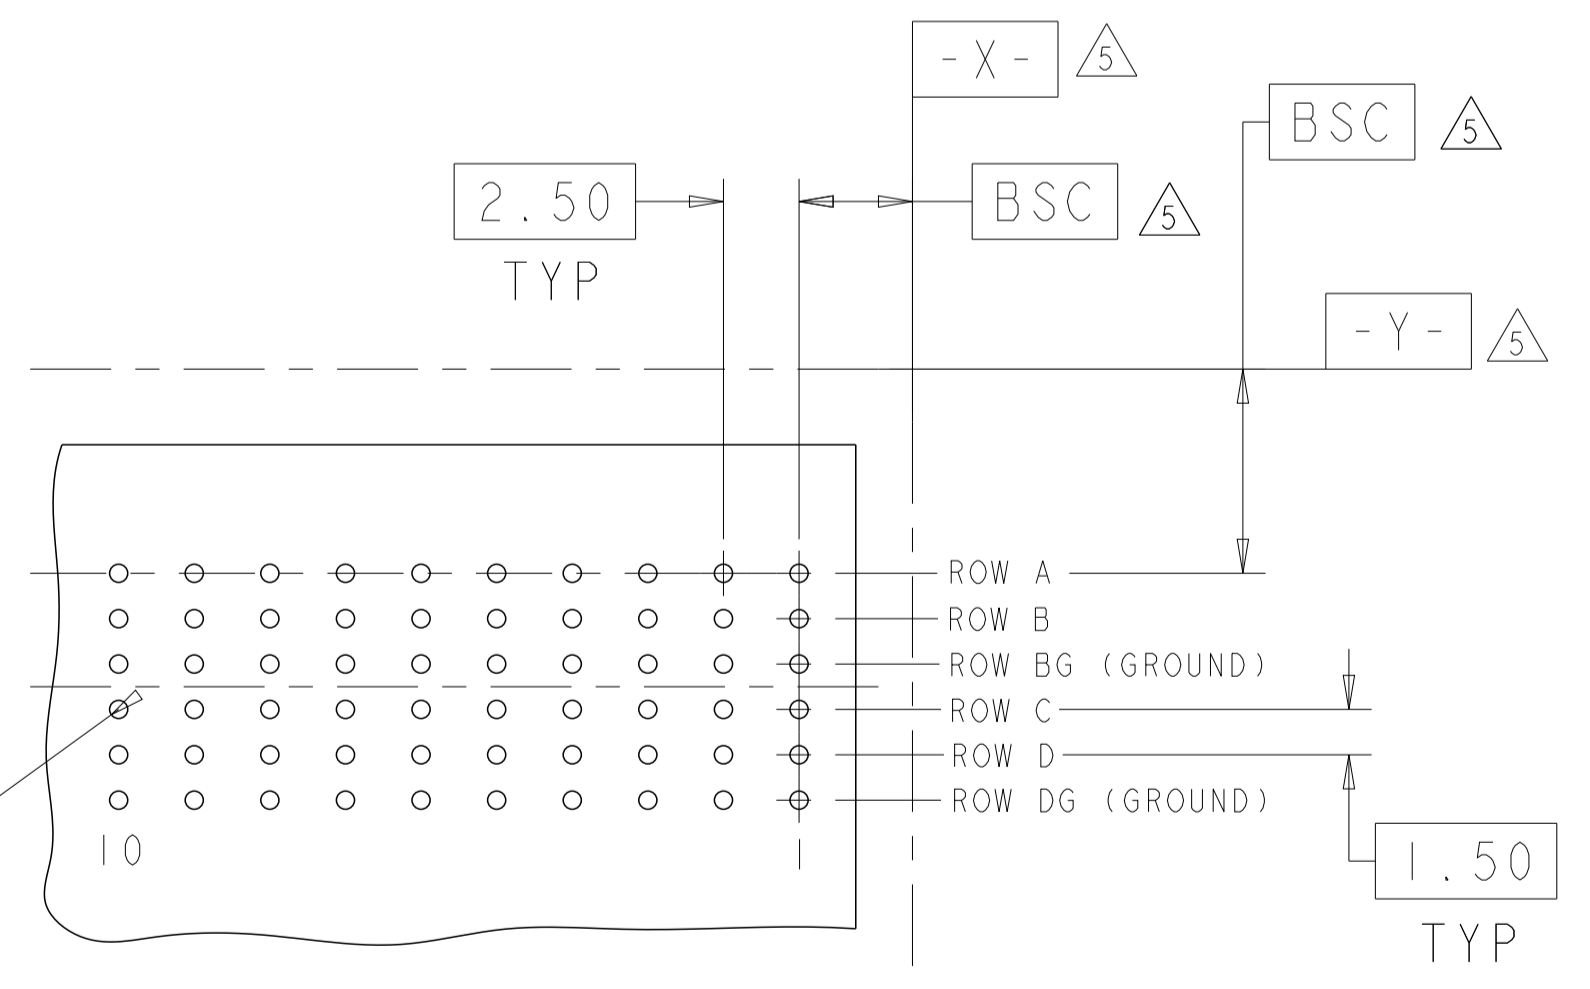

RECOMMENDED PC BOARD LAYOUT, BACKPLANE, COMPONENT SIDE SHOWN
 SCALE 4:1

1469334-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN: S. J. MAGARO 12JUN2003	TE Connectivity
CHK: R. PATTERSON 12JUN2003	
APVD: R. PATTERSON 17AUG2007	NAME: HEADER ASSEMBLY, 2 PAIR, SELECTIVELY LOADED, 2.5mm TAIL, 25mm, HMzd
TOLERANCES UNLESS OTHERWISE SPECIFIED:	SIZE: CAGE CODE: DRAWING NO: A100779 ©=1469334
0 PLC ±	RESTRICTED TO
1 PLC ±	SCALE: 8:1
2 PLC ±	SHEET 1 OF 1
3 PLC ±	REV D
4 PLC ±	
ANGLES ±	
FINISH ±	