


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
IR	-	B	INITIAL ISSUE	11FEB2013	PKS RRP
		B1	REVISED PER ECR-19-017984	27NOV2019	PC MK

NOTES:

1. CONTINUOUS STRIP ON REELS
2. WIRE RANGE: 18-14 AWG [0.8-2.0 SQ.mm]
3. INSULATION RANGE:  $\varnothing$ 2.67-4.32
4. FEED [PITCH] : 18.0

5 AMP LOGO

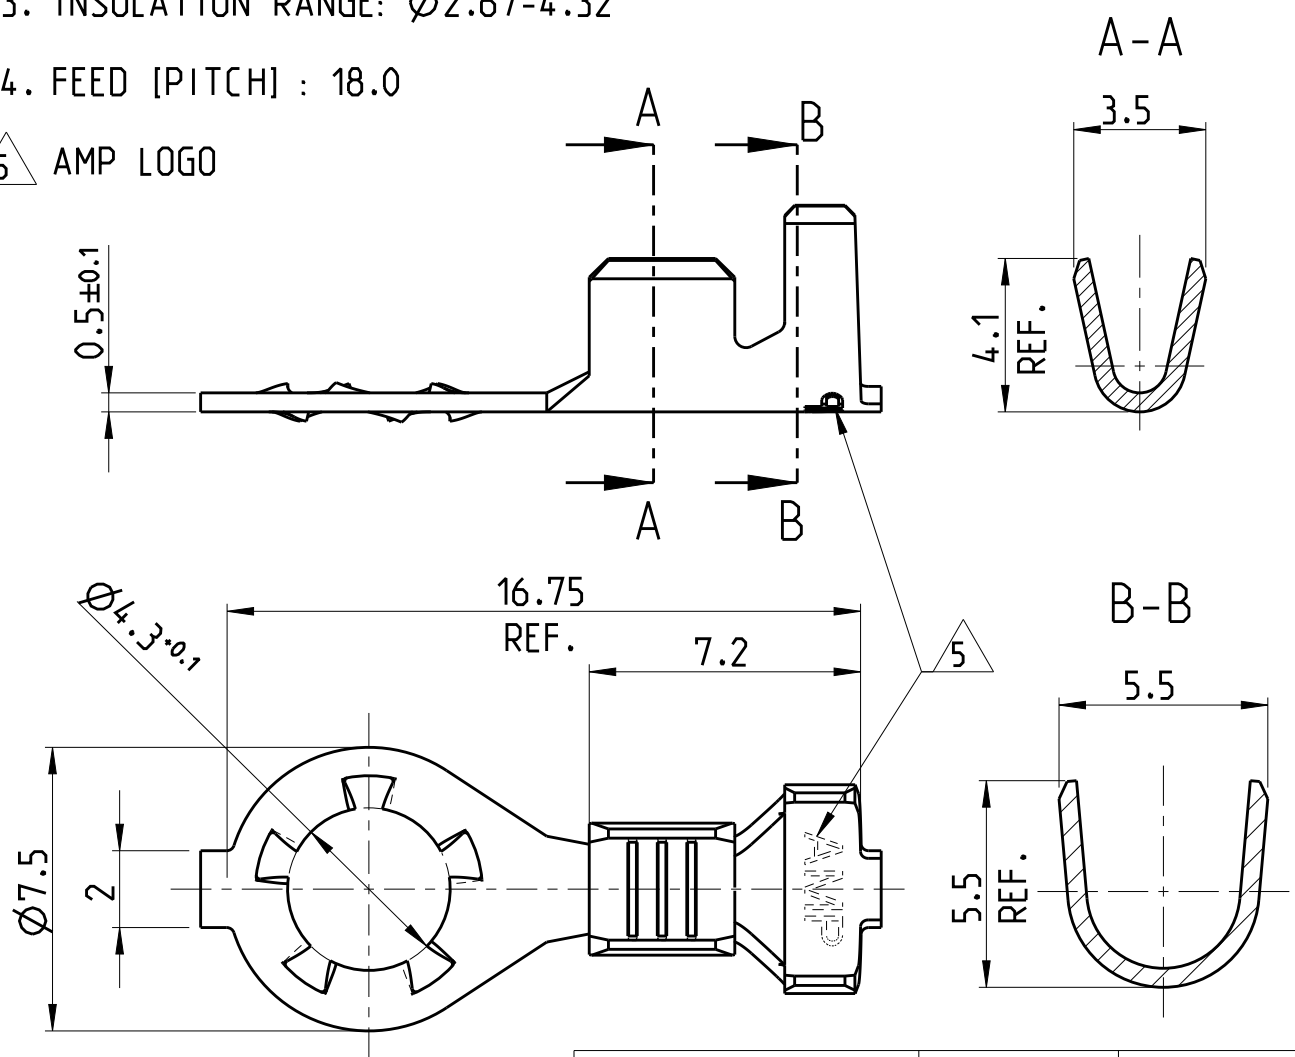

	PRE-TIN; 1-3 $\mu$ m	BRASS	2178304-3
OBSOLETE			<del>2178304-2</del>
OBSOLETE			<del>2178304-1</del>
	FINISH	MATERIAL	PART NO

2011  
 RELEASED FOR PUBLICATION  
 ALL RIGHTS RESERVED.  
 THIS DRAWING IS UNPUBLISHED.  
 COPYRIGHT 2011

DIMENSIONS: mm	DWN SENHIL 11FEB2013	MATERIAL SEE TABLE	FINISH SEE TABLE
TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK SENHIL 11FEB2013	TE Connectivity	
0 PLC $\pm$ 0.2	APVD RAJENDRA 11FEB2013		
1 PLC $\pm$ 0.2	PRODUCT SPEC	NAME ANTI-ROTATIONAL RING TONGUE TERMINAL	
2 PLC $\pm$ 0.1	APPLICATION SPEC	STUD DIA. 4.3; M4	
3 PLC $\pm$ 0.05		SIZE A 4	CAGE CODE 00779
4 PLC $\pm$		DRAWING NO C-2178304	RESTRICTED TO -
ANGLES $\pm$ °	WEIGHT 0.4g approx.	Customer Drawing	
		SCALE 5:1	SHEET 1 OF 1
		REV B1	