

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

2012

LOC

DIST

REVISIONS


© COPYRIGHT 2012 BY -

ALL RIGHTS RESERVED.

J

-

P	LTR	DESCRIPTION	DATE	DWN	APVD
B	REVISED	ECR-13-003830	11MAR2013	T.K	K.K
C	OBSOLETE	ECR-17-017873	18DEC2017	AL	WH

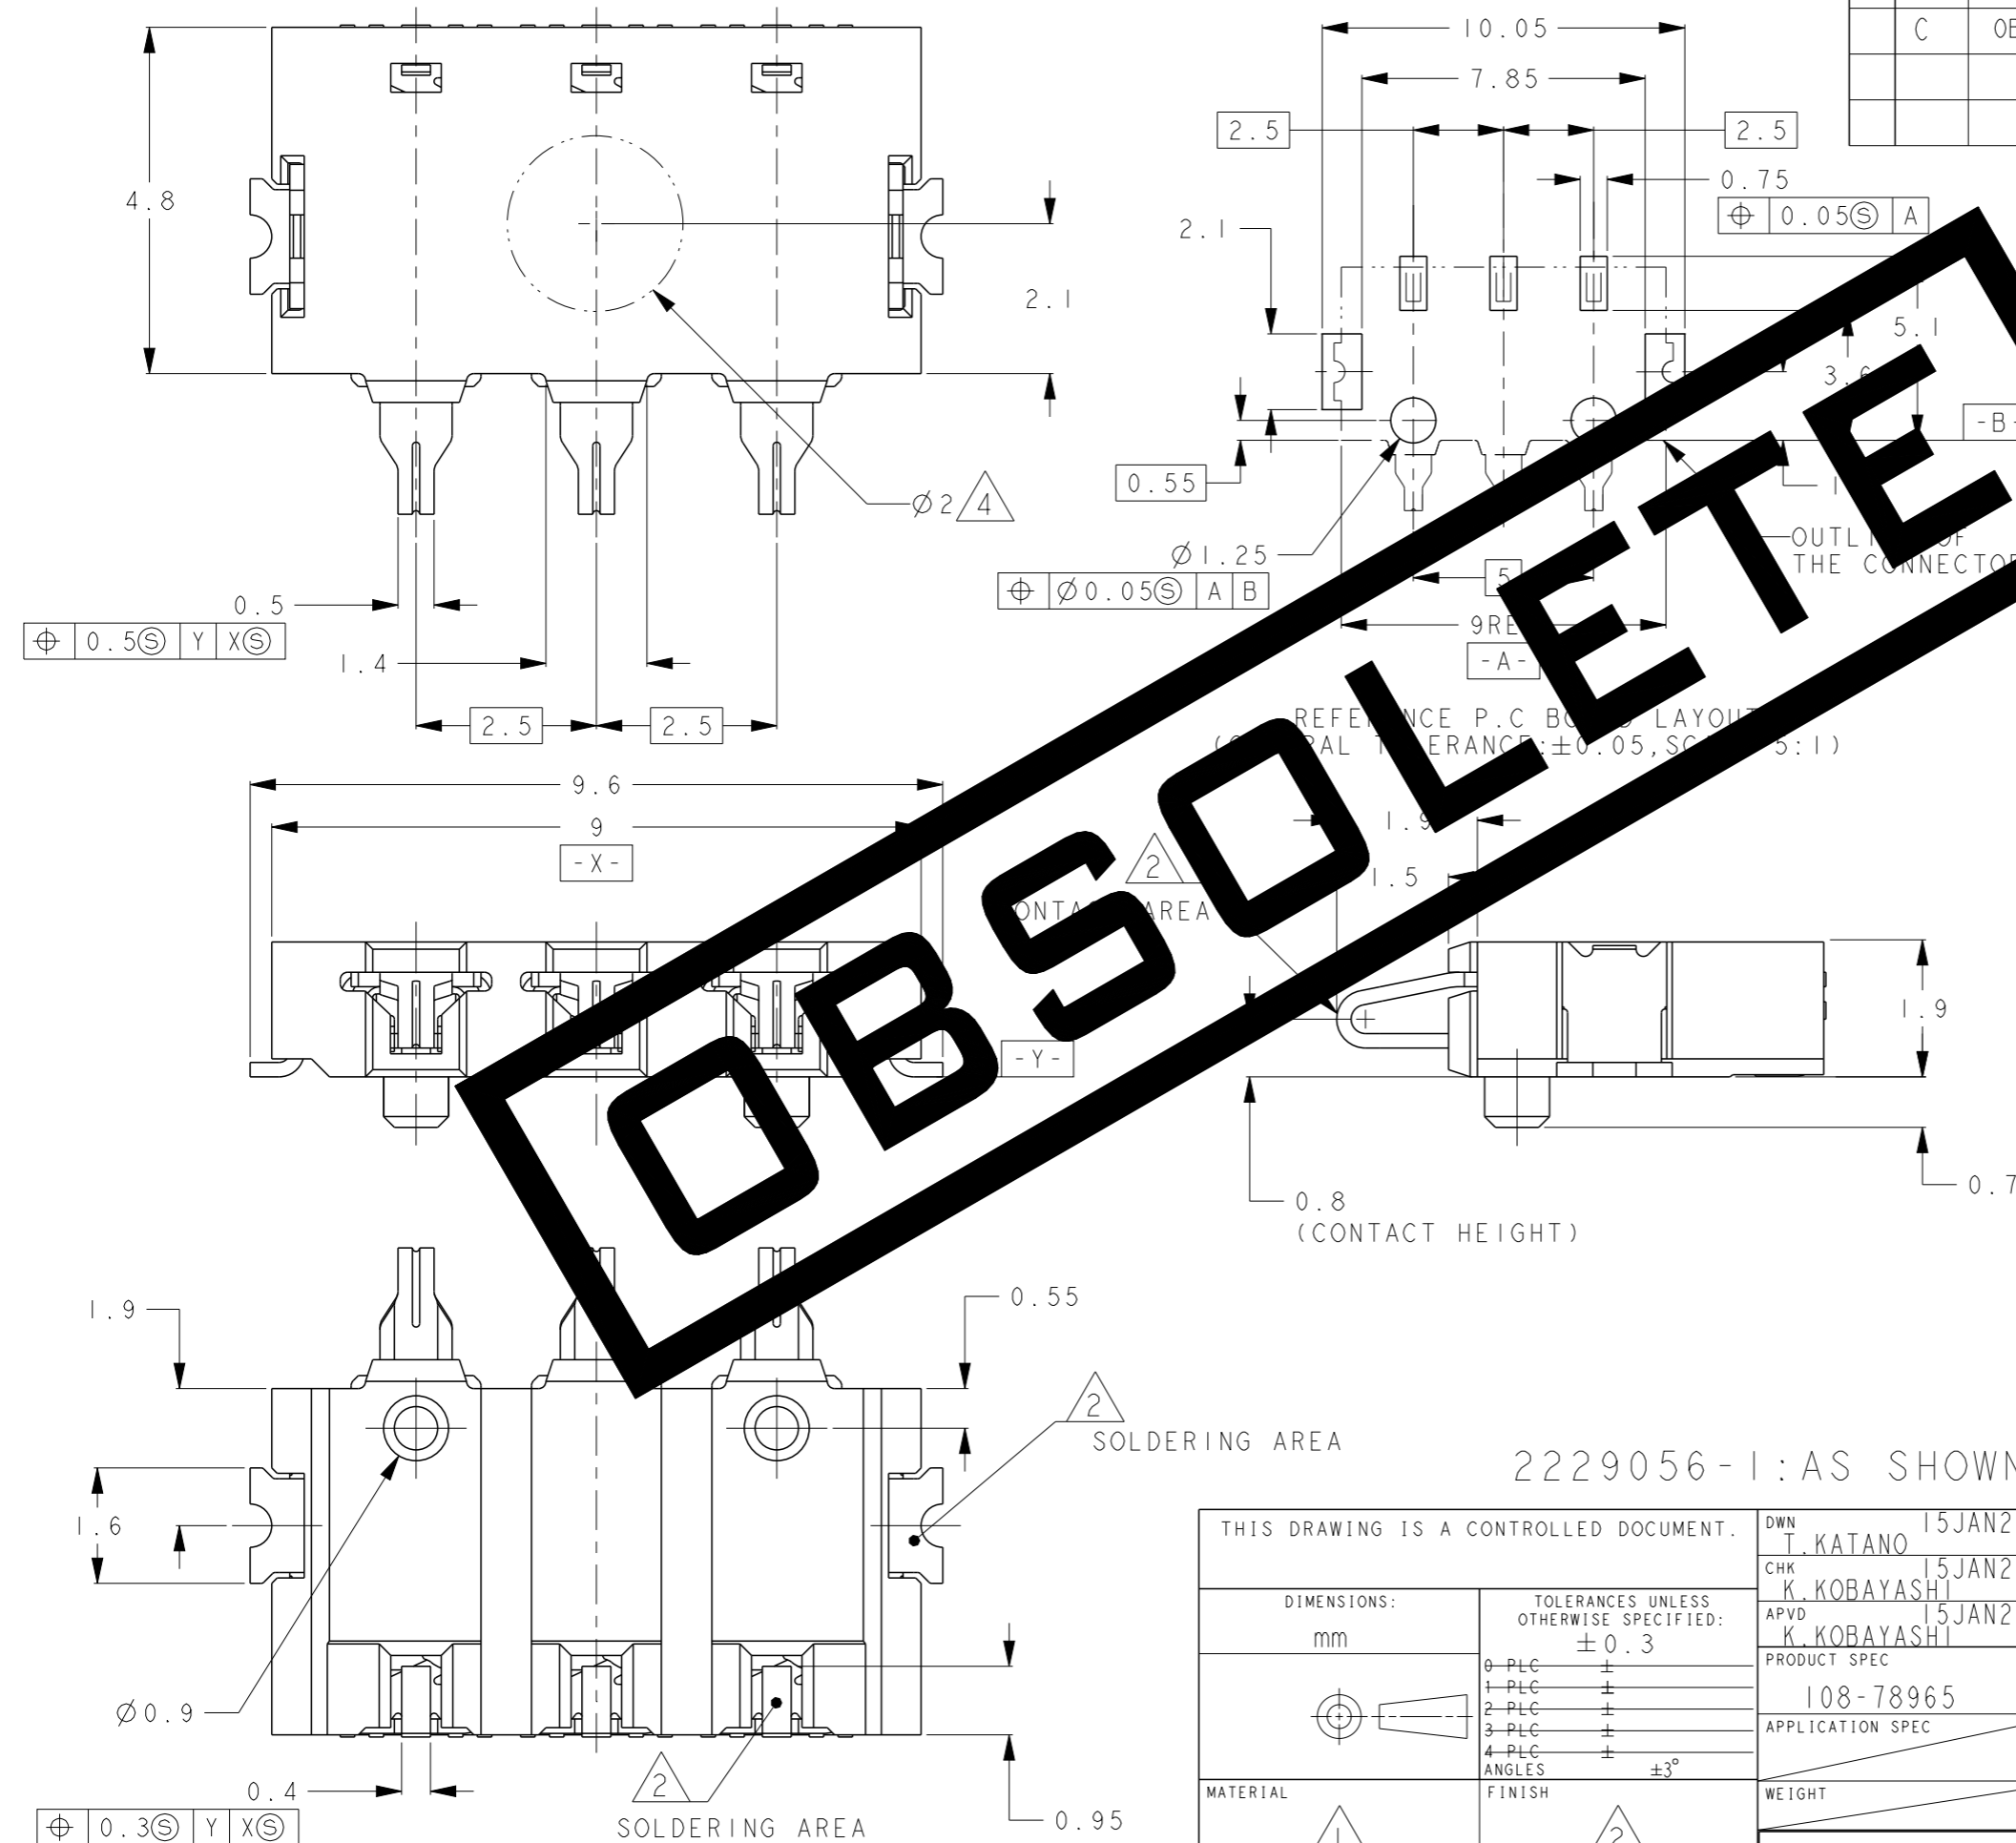


- △ MATERIAL
CONTACT: COPPER ALLOY
HOUSING: THERMOPLASTIC, UL94V-0, BLACK
SOLDER PEG: COPPER ALLOY
- △ FINISH
CONTACT: NICKEL ALL OVER UNDER PLATING
THICKNESS, 1µm MIN.
GOLD PLATING AT CONTACT AREA
THICKNESS, 0.3µm MIN.
GOLD FLASH PLATING AT SOLDERING AREA
THICKNESS, 0.05µm MIN.
SOLDER PEG: NICKEL ALL OVER UNDER PLATING
THICKNESS, 1µm MIN.
GOLD FLASH PLATING AT SOLDERING AREA
THICKNESS, 0.05µm MIN.
- 3. COPLANARITY 0.1MAX.
- △ PICK UP AREA
- 5. EMOSS AND COVER TAPE : ESD PROTECTION MATERIAL
- 6. STORAGE LIFE: UNDER 6 MONTHS
WITHOUT DRYPACK AND BAKING PROCESS

2229056-1: AS SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	T. KATANO	15JAN2013	 TE Connectivity
DIMENSIONS: mm		CHK	K. KOBAYASHI	15JAN2013	
TOLERANCES UNLESS OTHERWISE SPECIFIED: ± 0.3		APVD	K. KOBAYASHI	15JAN2013	
0-PLC ± 1-PLC ± 2-PLC ± 3-PLC ± 4-PLC ± ANGLES ±3° FINISH		PRODUCT SPEC	108-78965		NAME
MATERIAL		APPLICATION SPEC			LOW PROFILE BATTERY CONNECTOR 3 POS. CONTACT HEIGHT 0.8mm
△ 1		WEIGHT			SIZE
△ 2		CUSTOMER DRAWING	A300779		CAGE CODE
		SCALE	10:1		DRAWING NO
		SHEET	1 OF 2		RESTRICTED TO
		REV	C		

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

→ DIRECTION OFF TOP OF REEL

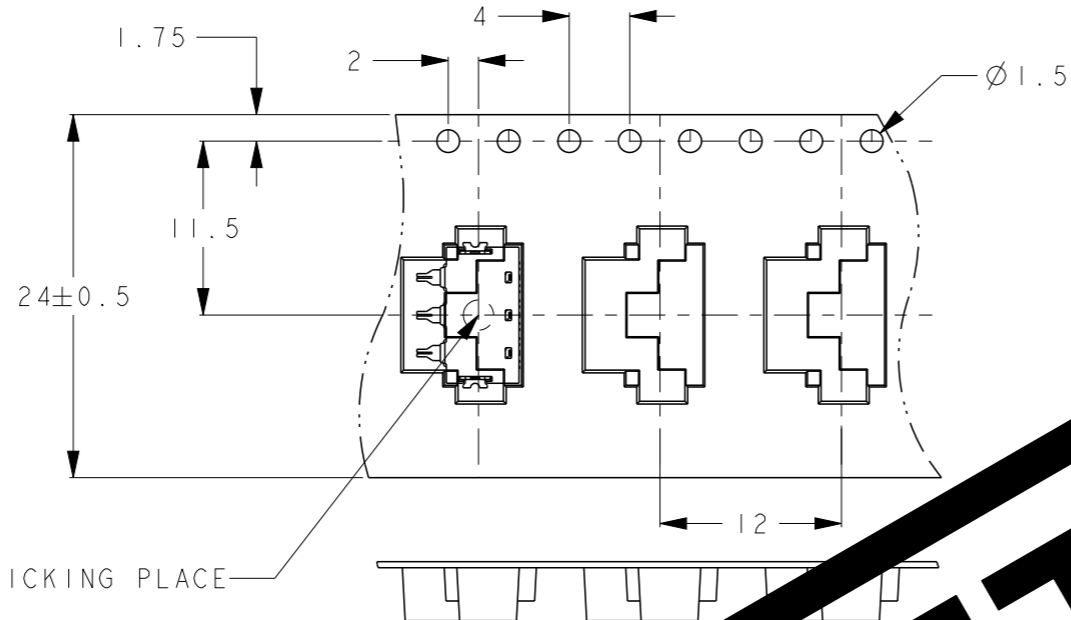

CENTER OF THE PICKING PLACE

FLANGE CORE DIA
Ø100REF

Ø330REF
REEL DIA.

30.4 REF
REEL WIDTH

24.4REF

300REF
WITHOUT CHARGE

WITH PRODUCT CHARGE
1400PCS/REEL

WITHOUT CHARGE
20HOLES MIN.


300 REF
WEED THE COVER TAPE.

165°~180°
PEELING ANGLE
0.1~0.7N(300mm/min)
PEELING STRENGTH

OBSCOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS
OTHERWISE SPECIFIED:
±0.3

Ø PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±3°
FINISH	

MATERIAL

DWN
CHK
APVD
PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING



TE Connectivity

NAME
LOW PROFILE BATTERY CONNECTOR 3 POS.
CONTACT HEIGHT 0.8mm

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A300779	C	2229056	

SCALE	SHEET	OF	REV
2:1	2	2	C