

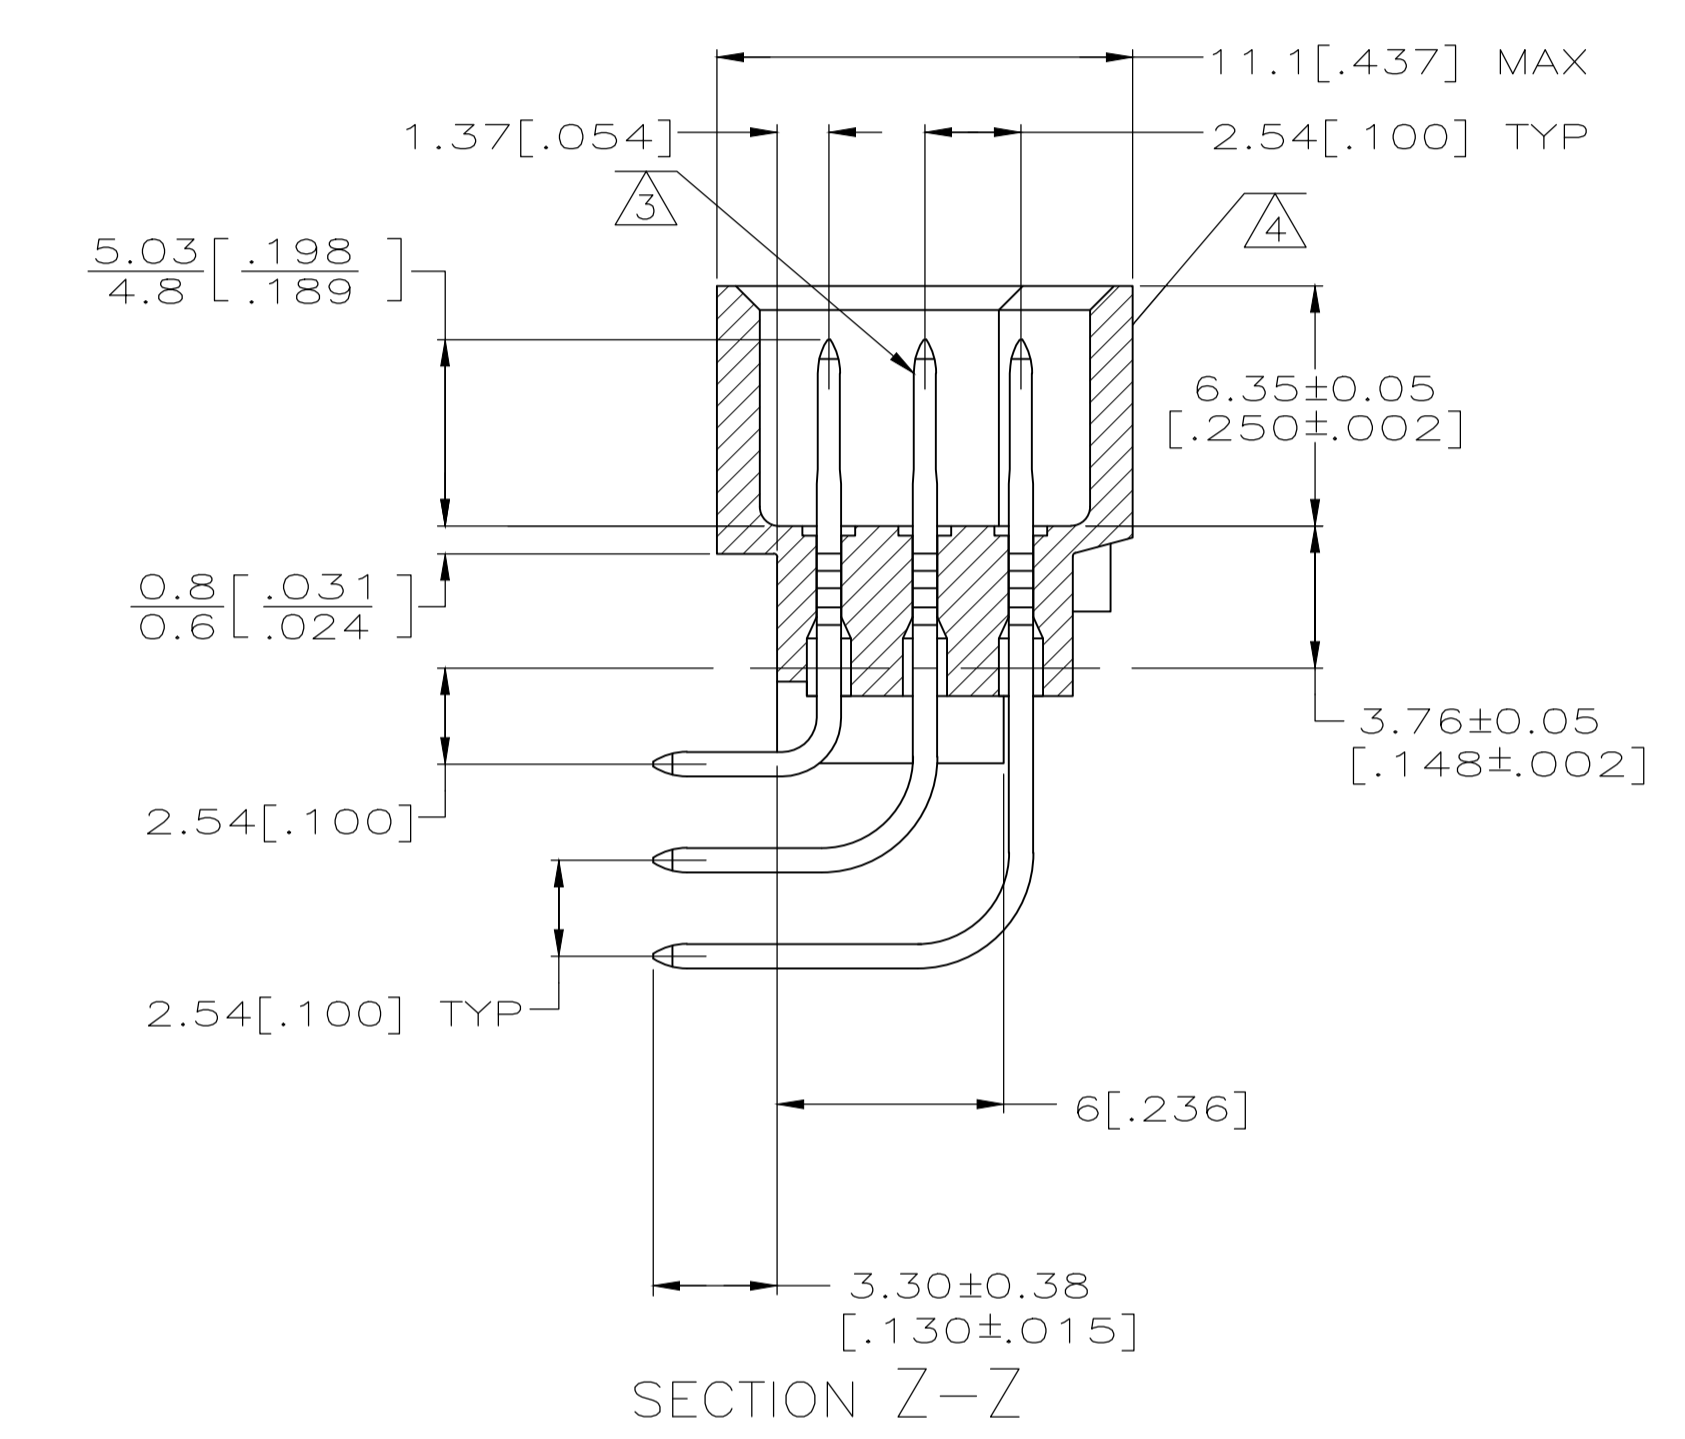
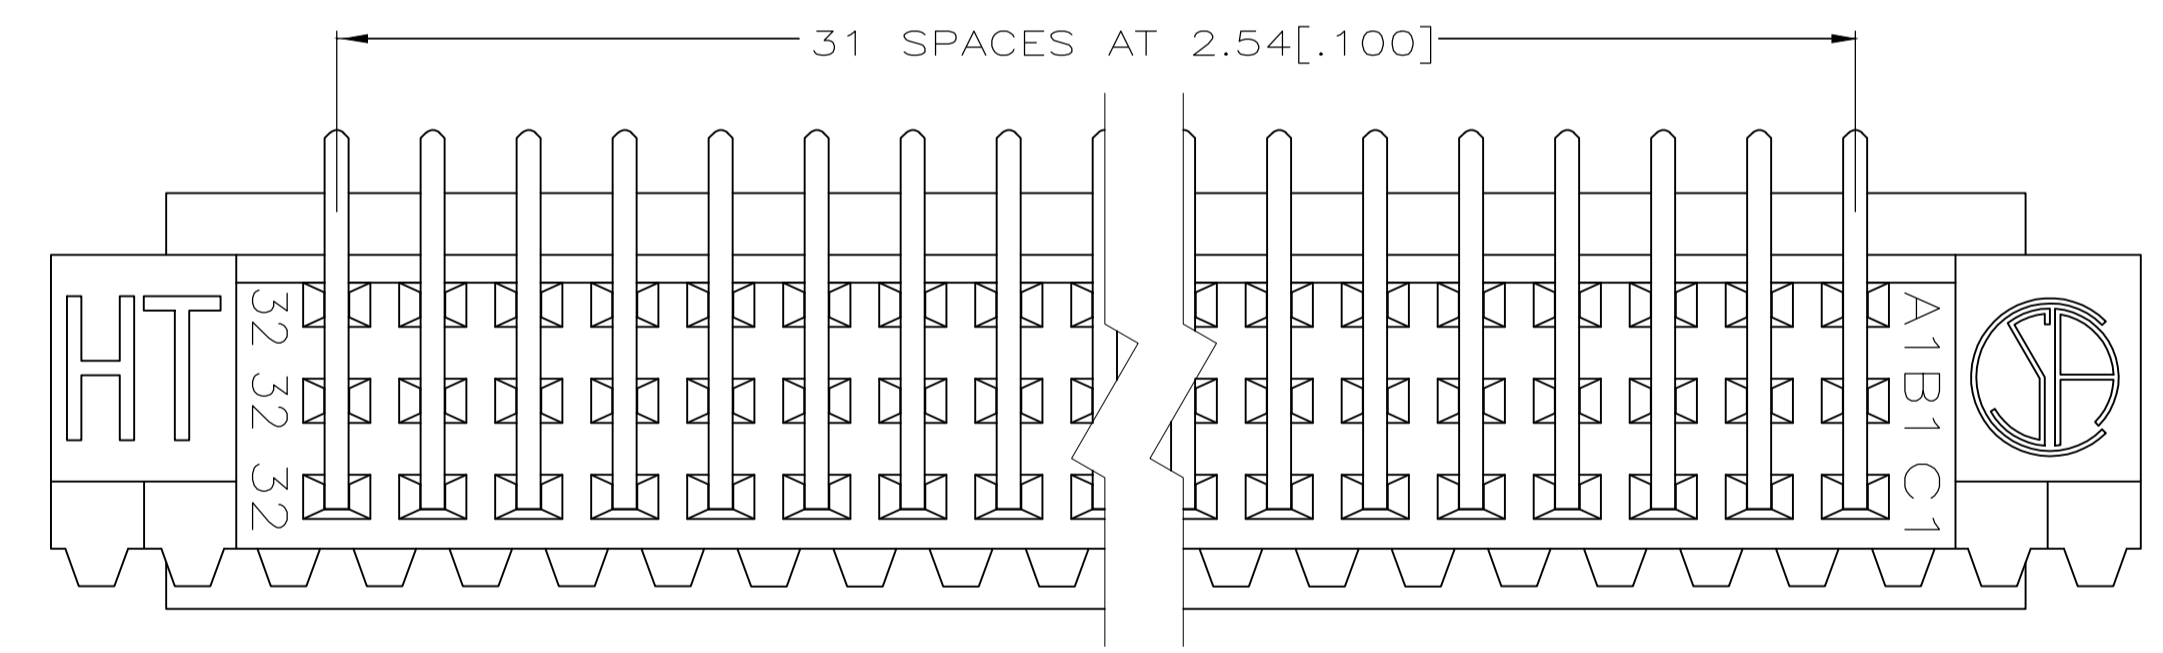
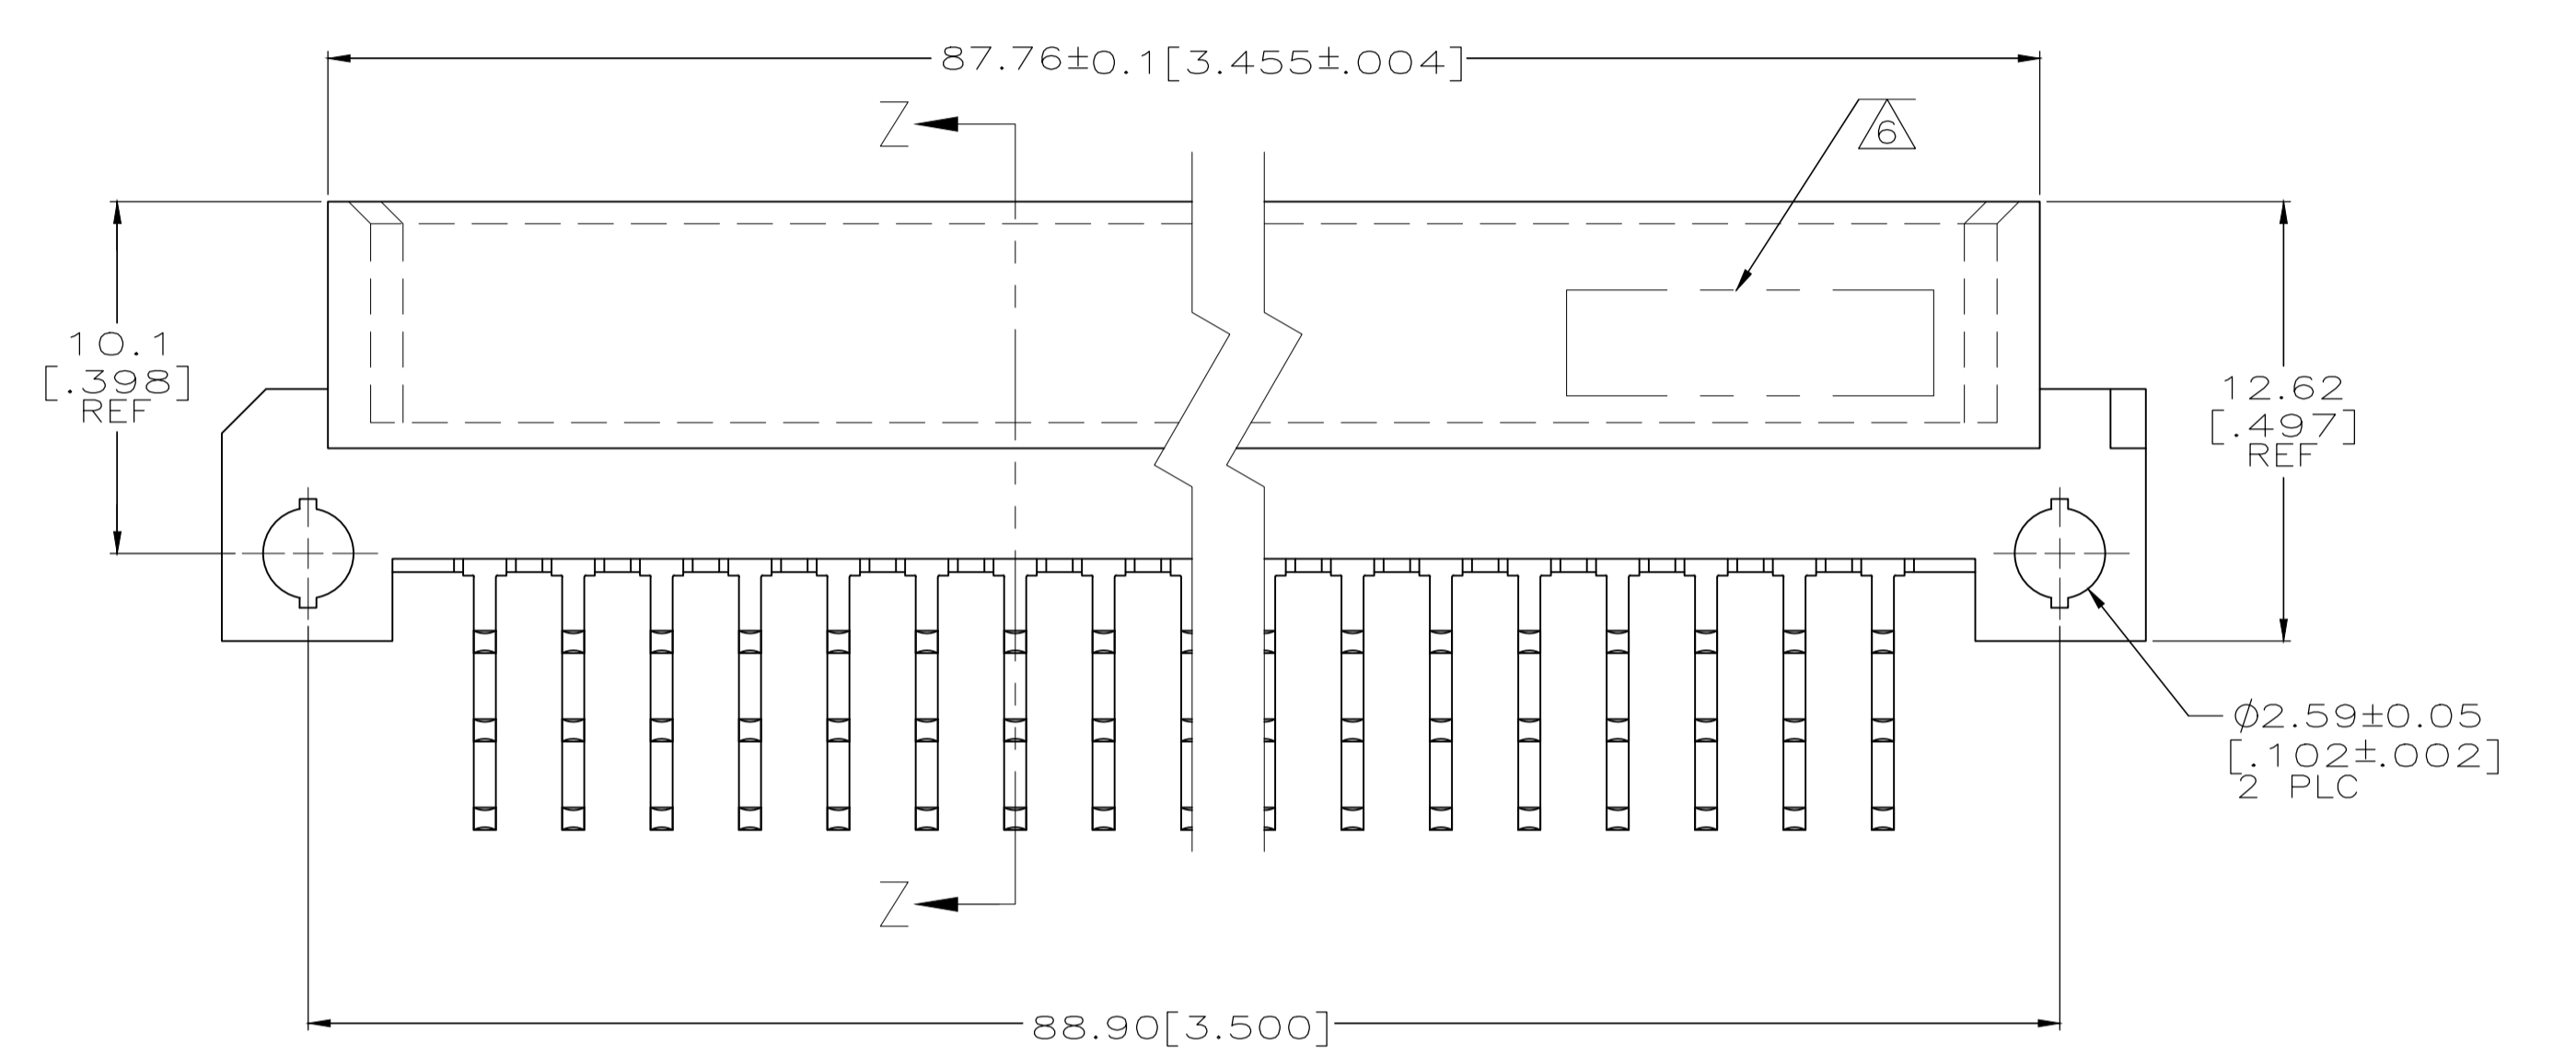


REVISIONS				
P	LTR	DESCRIPTION	DATE	APP'D
A		REVISED PER ECO-19-003043	26FEB2019	SY HL

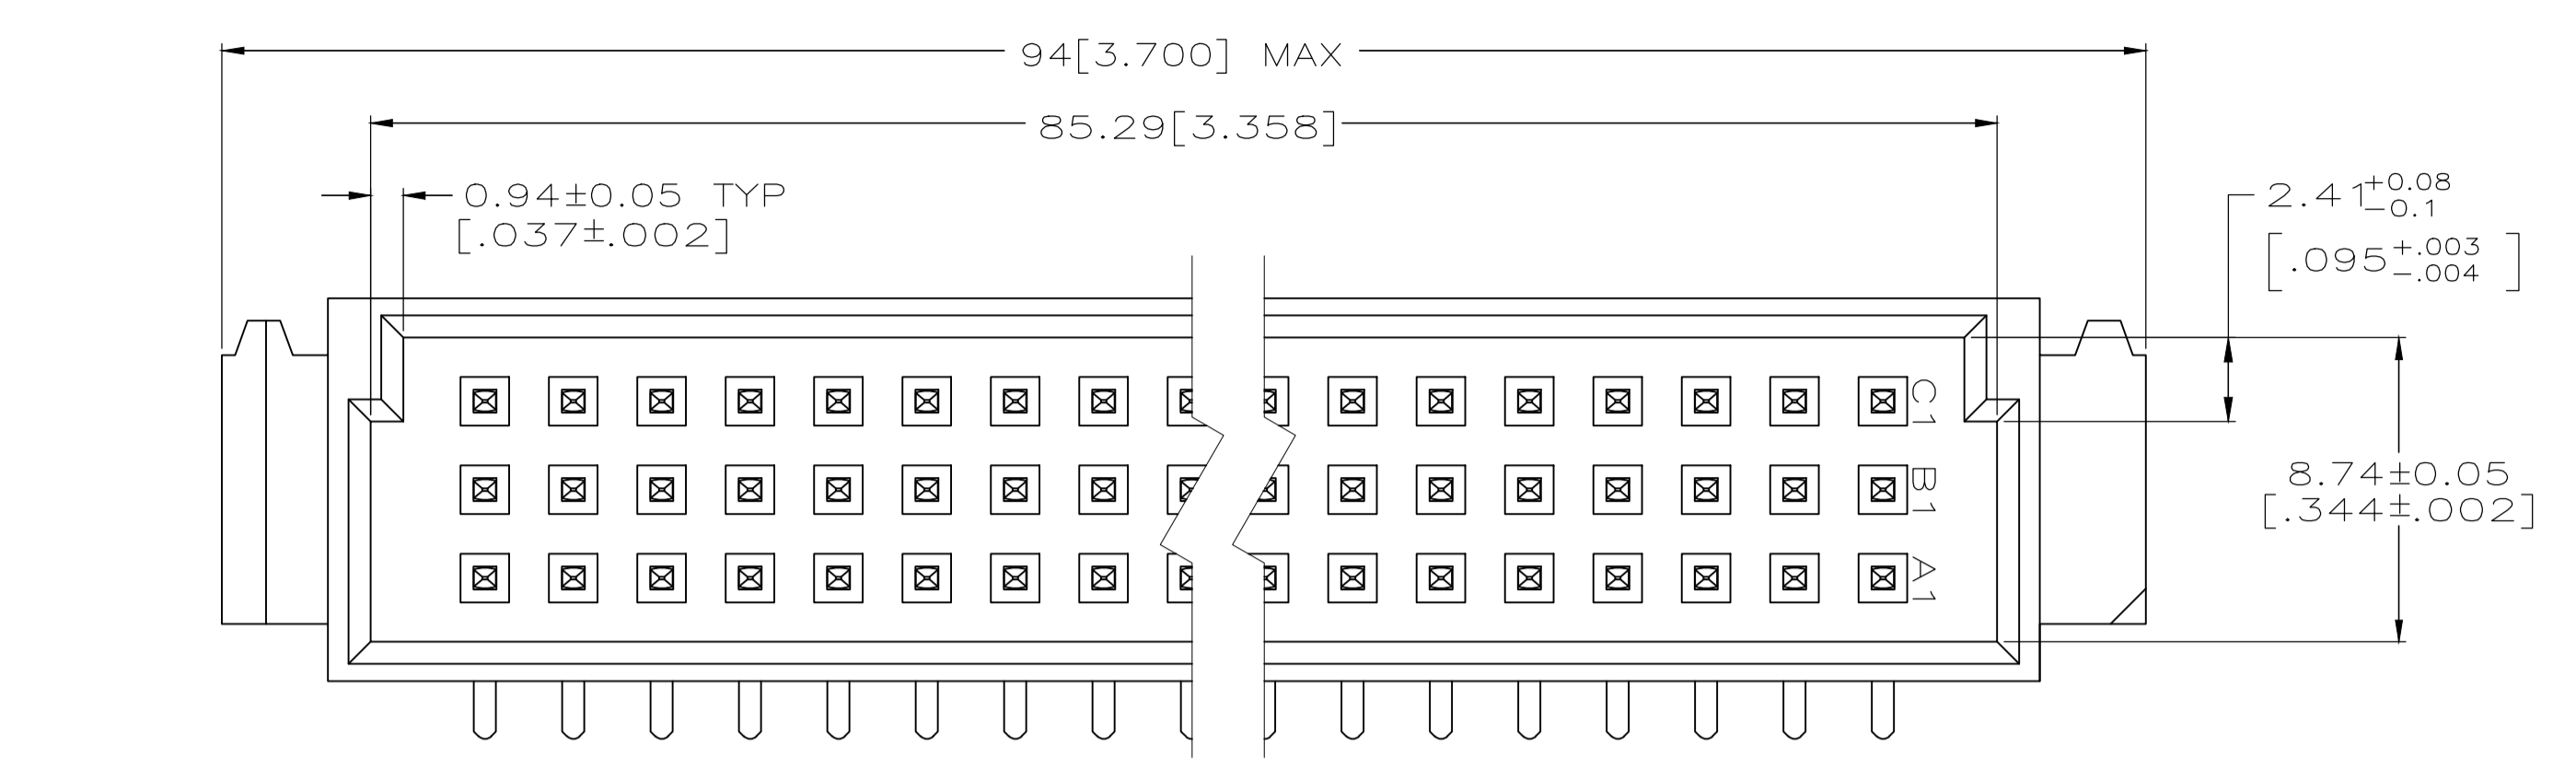

- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 4162 CLASS 2 IN CONTACT AREA. TIN PLATE ON POSTS.
- △ MARKING ON THIS SIDE.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.
- △ POST FINISH: 0.76µm MIN GOLD IN CONTACT AREA. TIN PLATE ON POSTS.

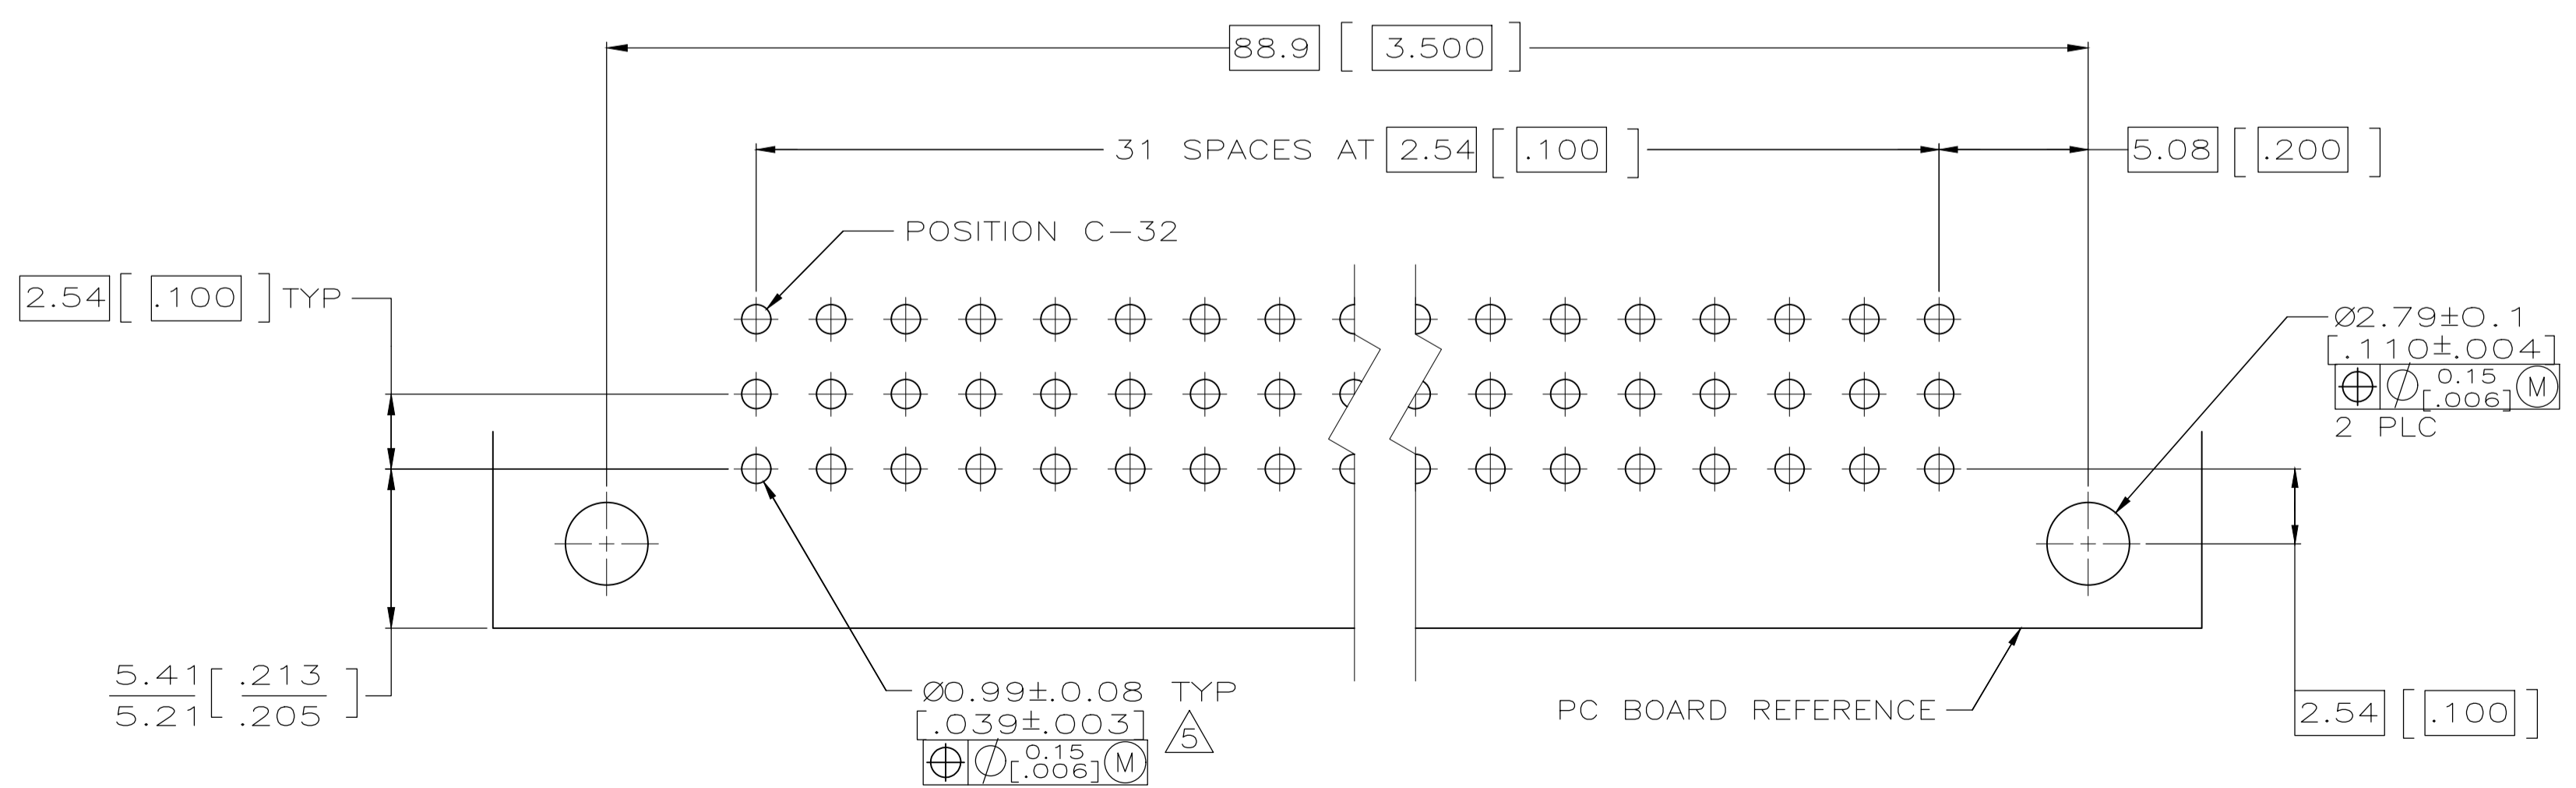

PC BOARD LAYOUT

FINISH	POSITIONS LOADED	ROWS LOADED	NO. OF LOADED POSITION	ASSY PART NUMBER
△	1-32	X X X	96	5650947-4
△	1-32	X X X	96	5650947-5

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN J. POLIGNONE	OSMAYOS	NAME
0 PLC ± -	1 PLC ± -	OSMAYOS	OSMAYOS	ASSEMBLY, PIN, EUROCARD, TYPE C
2 PLC ± -	3 PLC ± 0.13(.005)	APVD A. SHARPE	OSMAYOS	96 POSITION, .130 SOLDER POST
4 PLC ± -	ANGLES ± -	APPLICATION SPEC		

MATERIAL: △/△ FINISH: △

WEIGHT	0.000000	SIZE	A1	CAGE CODE	00779	DRAWING NO	5650947	RESTRICTED TO	-
CUSTOMER DRAWING		SCALE	5:1	SHEET	1	OF	1	REV	A