

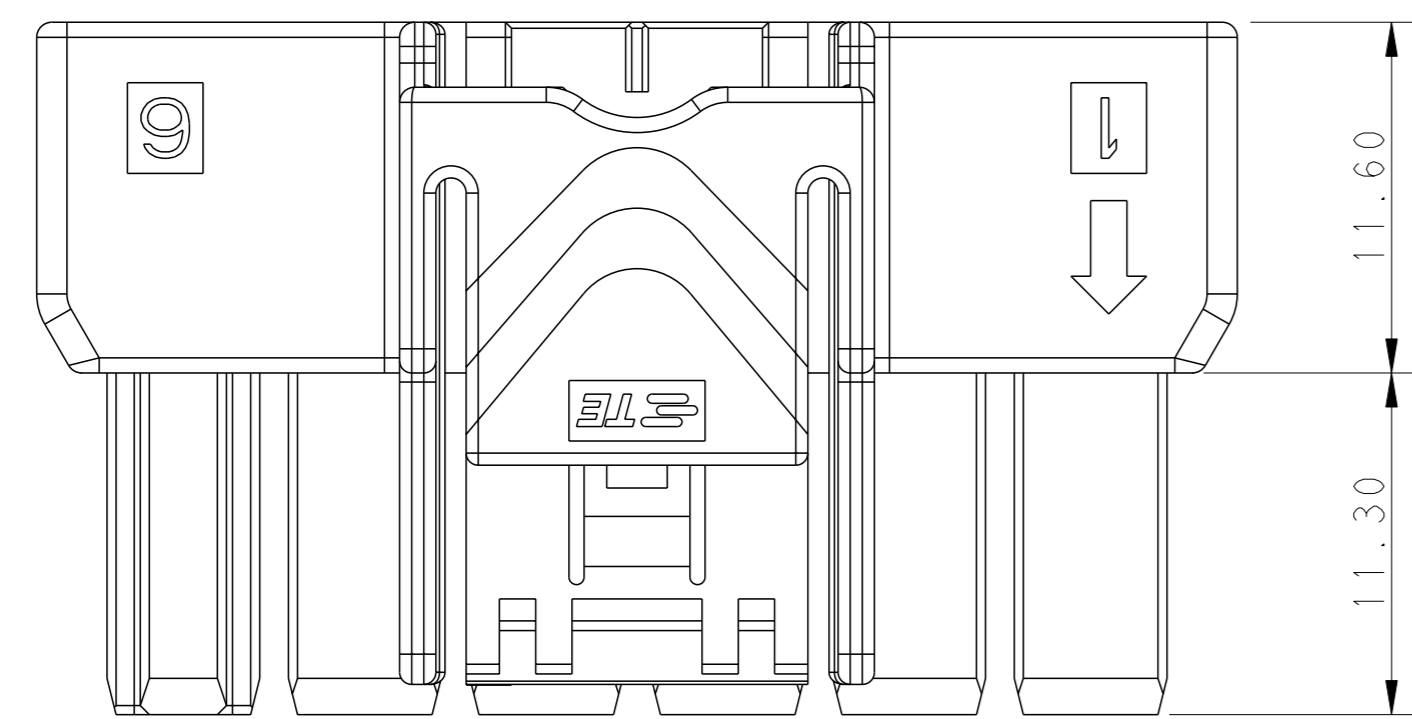
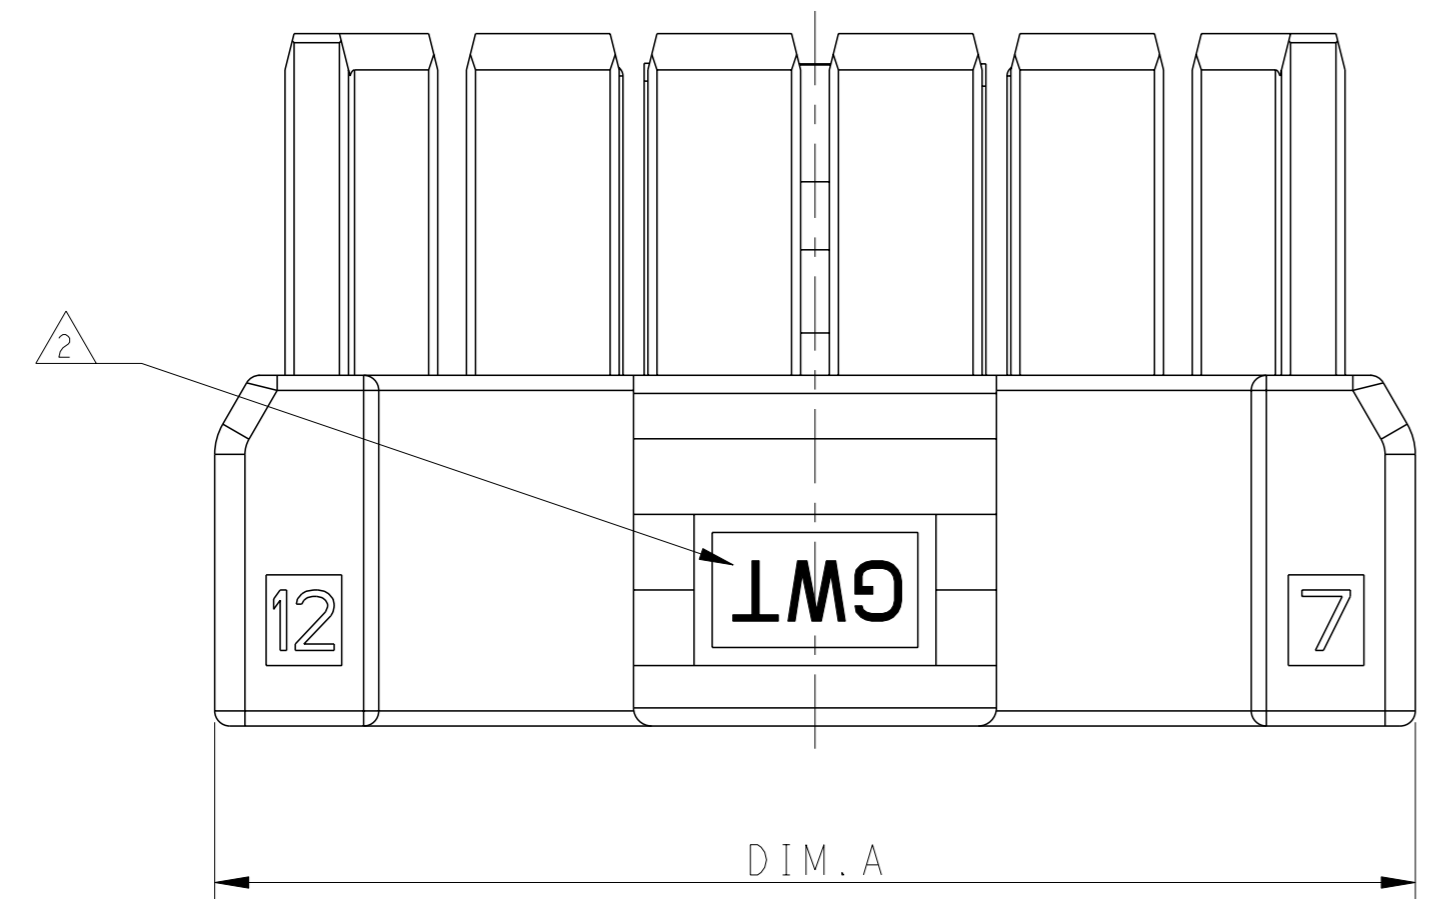
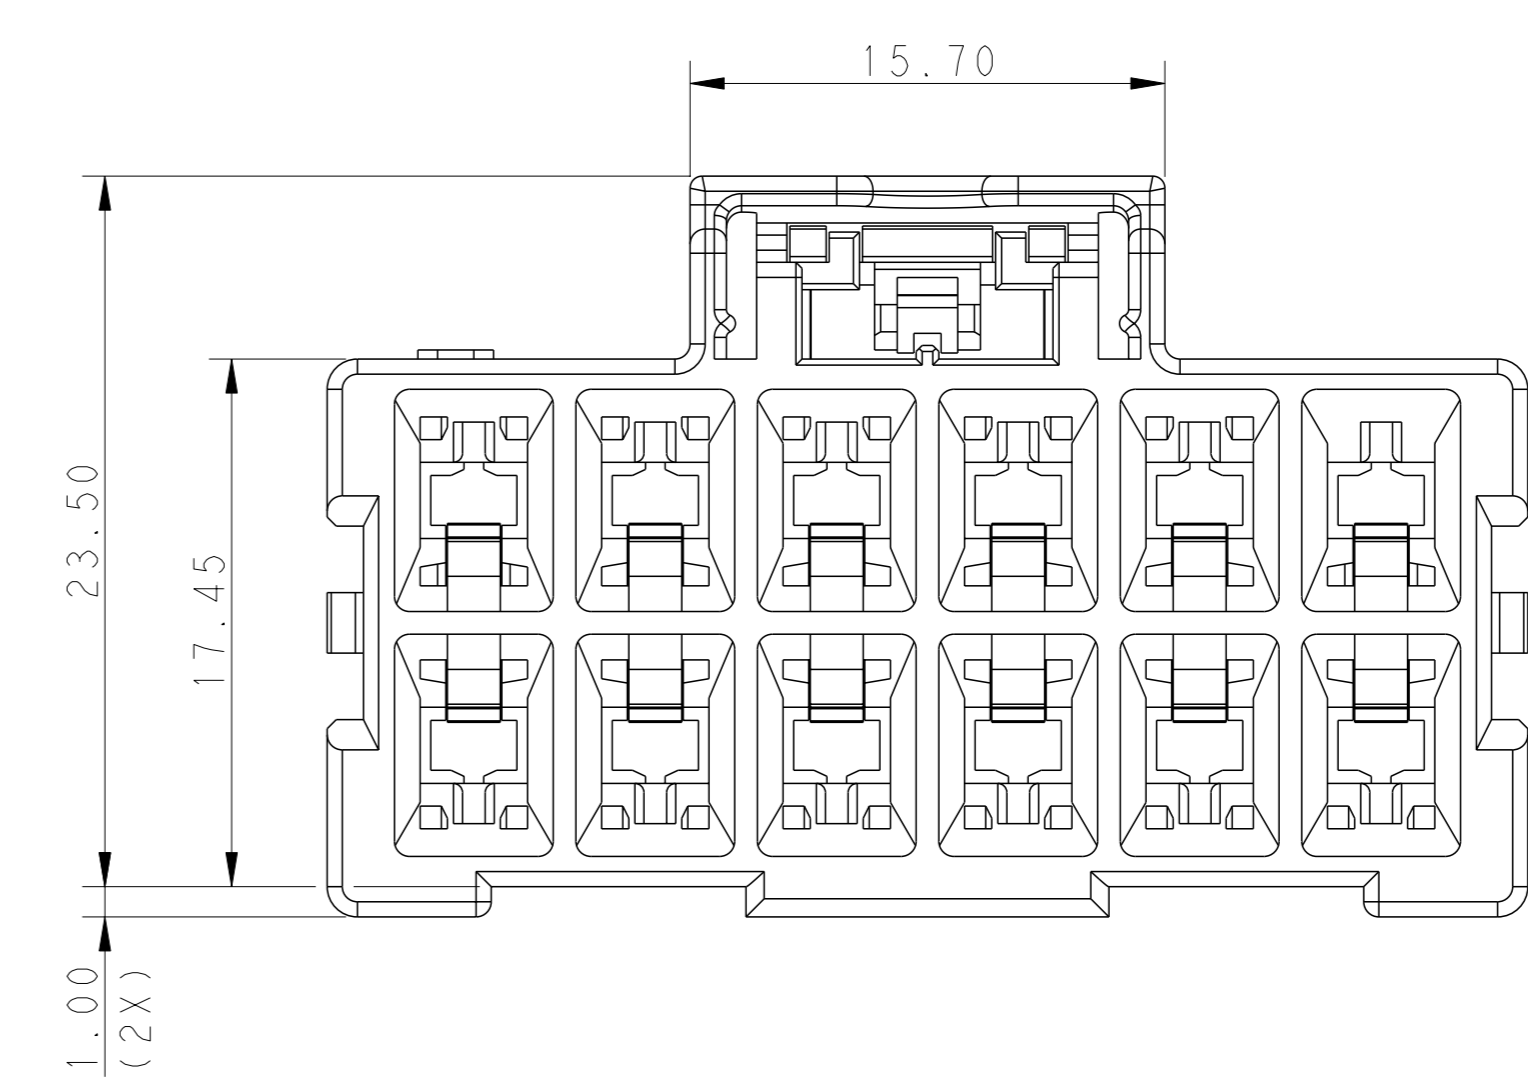


LOC	DIST	REVISIONS			
		REV	DATE	BY	CHK
		B1	15OCT2018	BW	GJ
		B2	23JAN2019	BKW	GJ

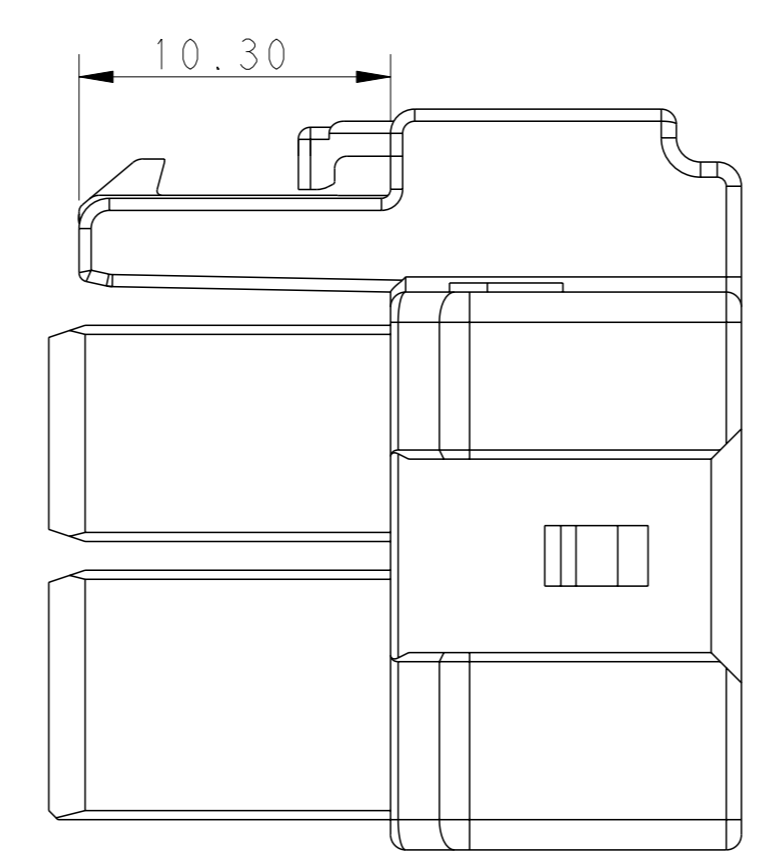

POS.	DIM. A
2*6	39.70
2*5	33.70
2*4	27.70
2*3	21.70

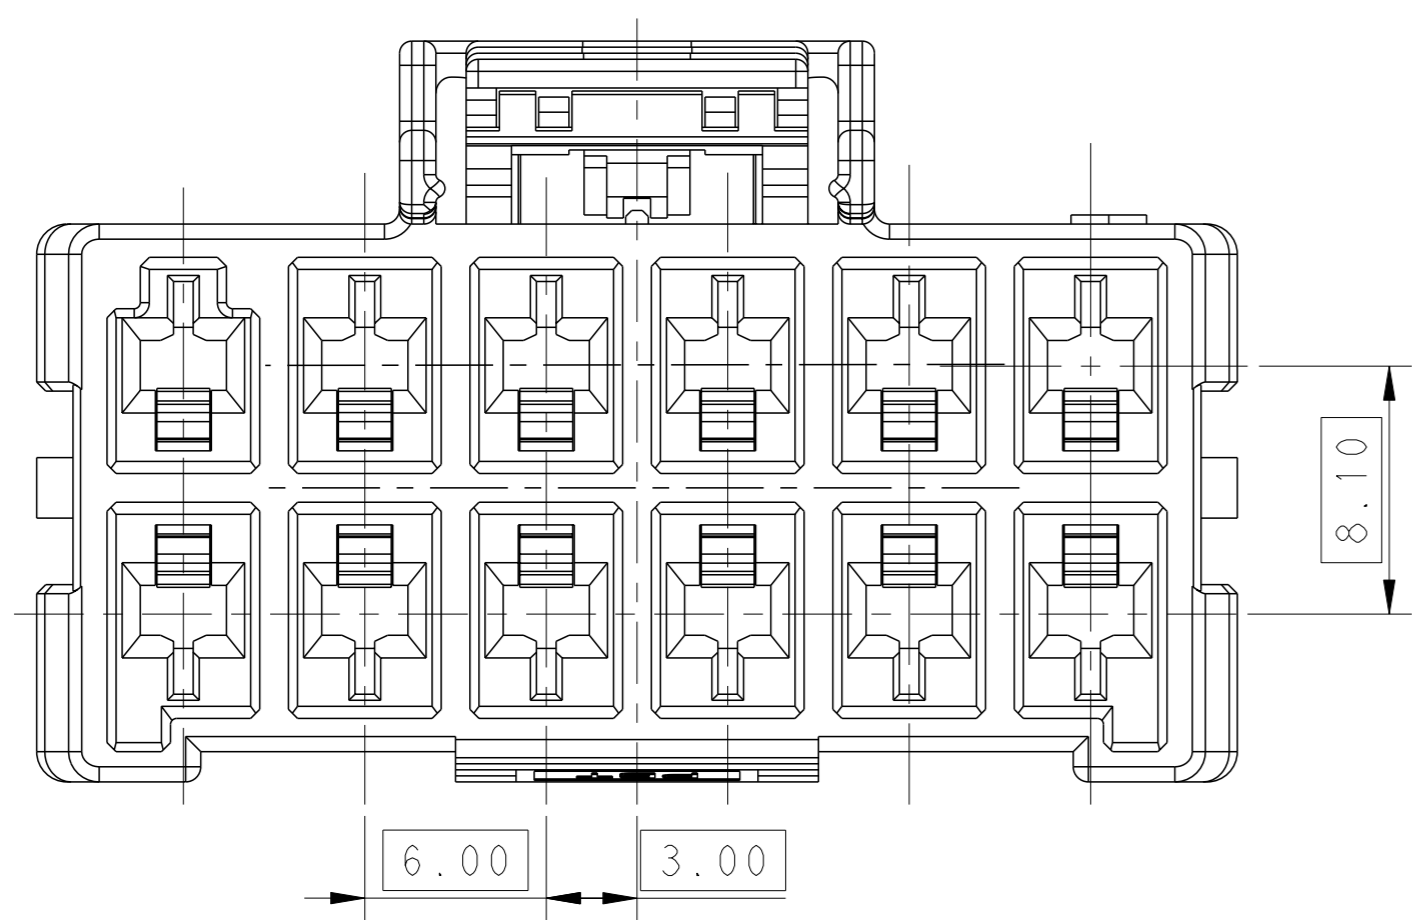

NOTE

- MATERIAL:
  - LEVEL A: PA6, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0
  - LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE PENDING HOT WIRE IGNITION TEST AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0

- MATERIAL MARK:
  - LEVEL A:GWT,LEVEL B:HWT



- APPLICABLE CONTACT P/N
  - RECEPTACLE CONTACT:1971237/1971779/81/83/85/87-\*,2238066-\*

- MATING CONN, P/N
  - CAP HSG: \*-2232359/264-\*
  - TPA: \*-1971778-\*



5. This product has not completed validation testing.

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: TOMMY WU 26MAR2013	TE Connectivity
DIMENSIONS: mm		CHK: HAPYE WU 26MAR2013	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: YIHONG MAO 26MAR2013	NAME: PLUG HOUSING, DOUBLE ROW POWER TRIPLE LOCK
0 PLC ±	1 PLC ±0.35	PRODUCT SPEC	SIZE: A1
2 PLC ±0.25	3 PLC ±	108-106118	CAGE CODE: 00779
4 PLC ±	ANGLES ±	APPLICATION SPEC	DRAWING NO: 2232266
MATERIAL: -	FINISH: -	114-106118	RESTRICTED TO: -
		WEIGHT: -	SCALE: -
		Customer Drawing	SHEET 1 OF 2 REV B2



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION	DATE	OWN	APVD		
-	-	SEE SHEET 1	-	-	-		

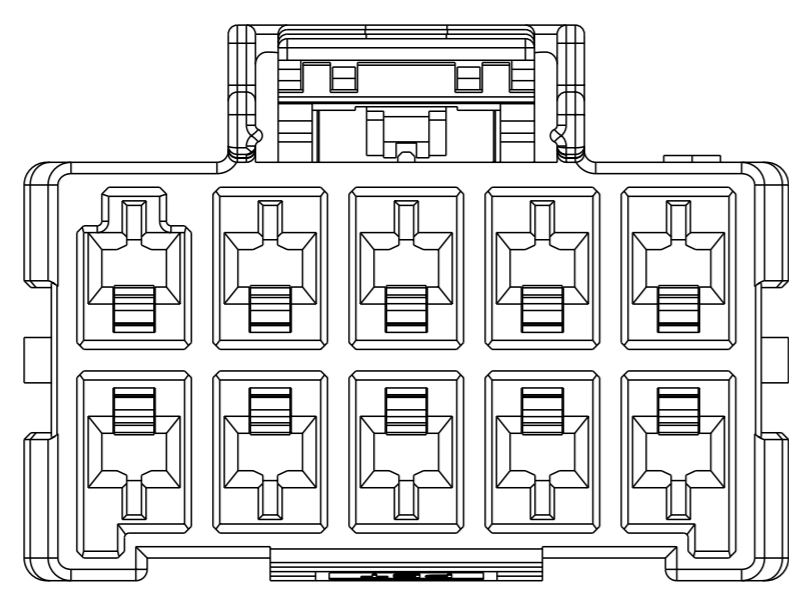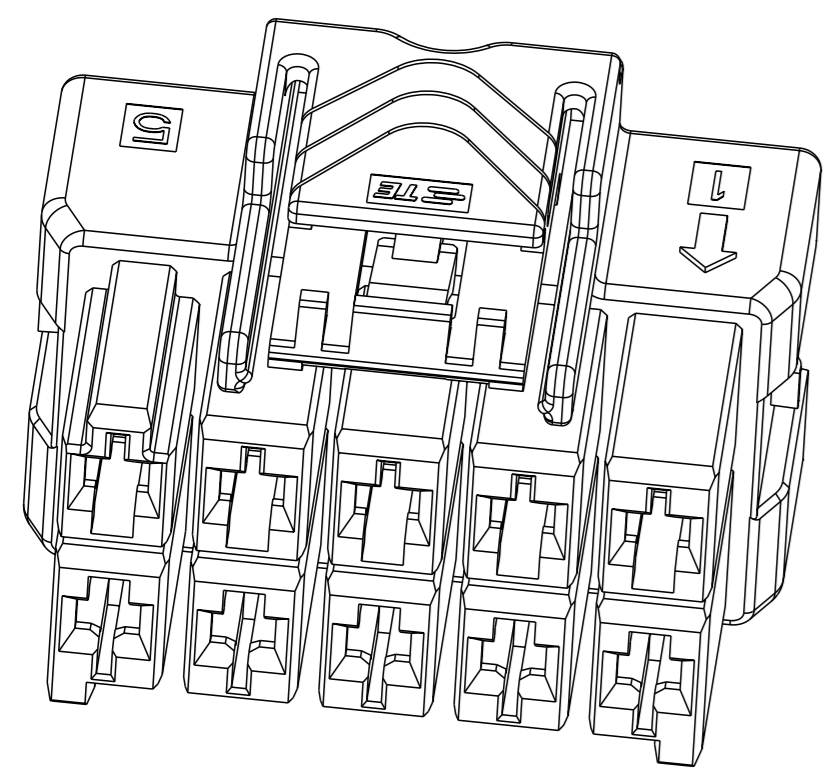


2\*5 POSITIONS

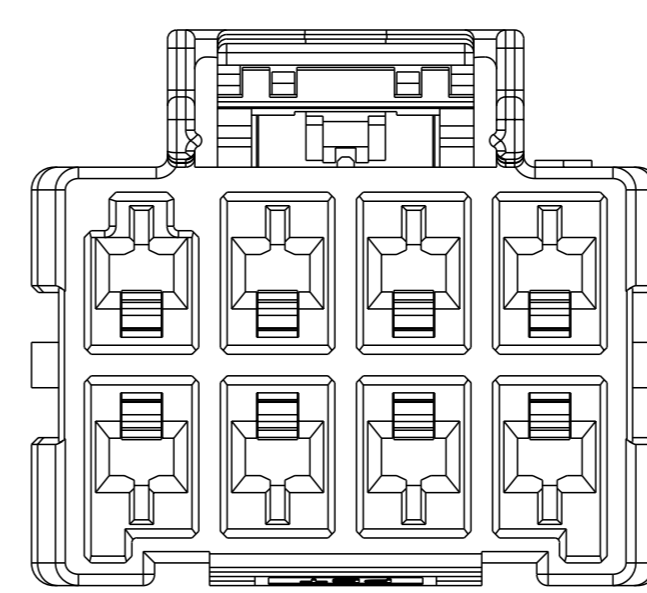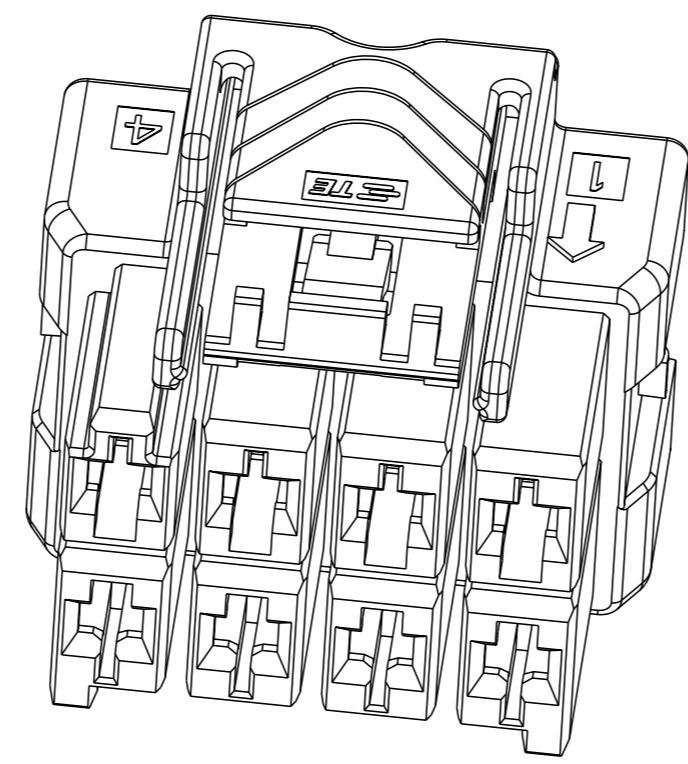


2\*4 POSITIONS

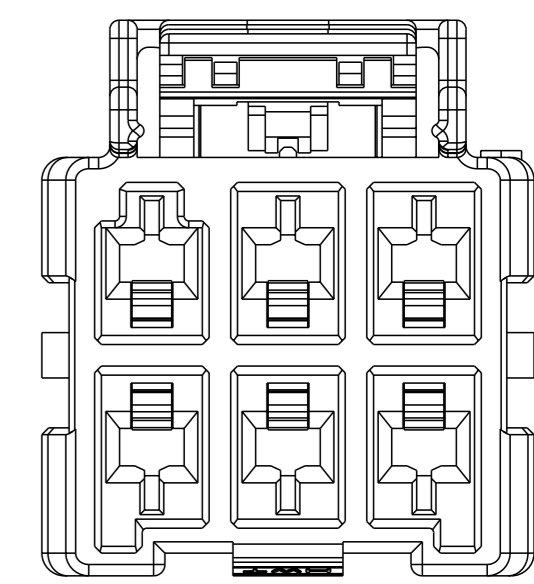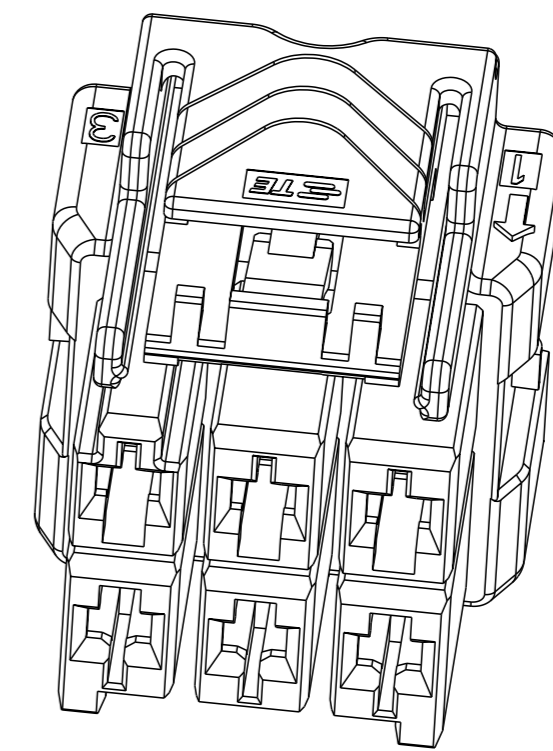


2\*3 POSITIONS

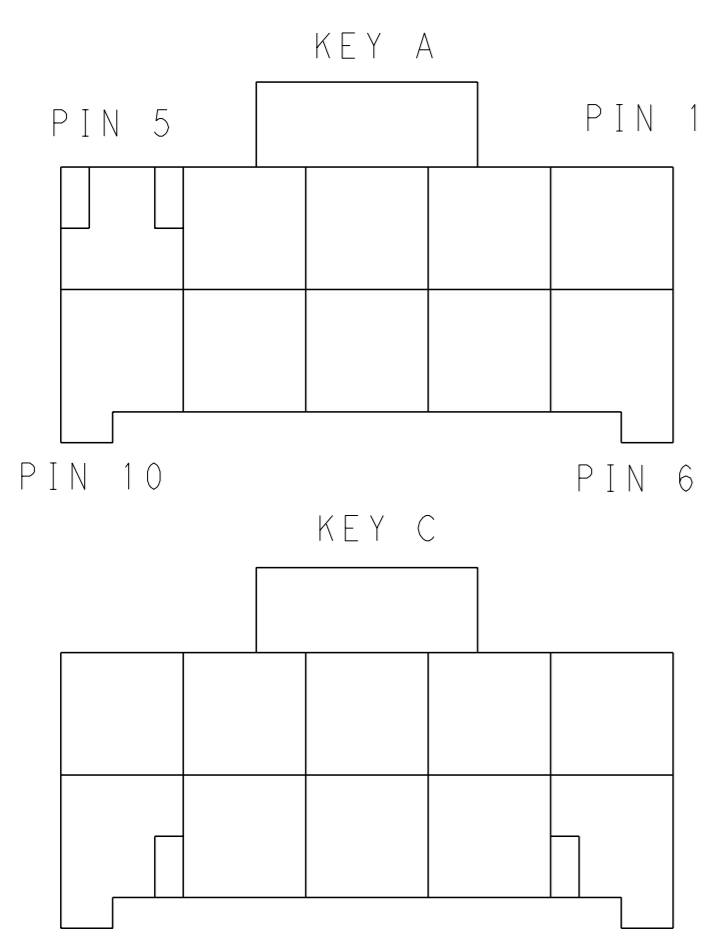



KEYING FOR 2\*5 POS.

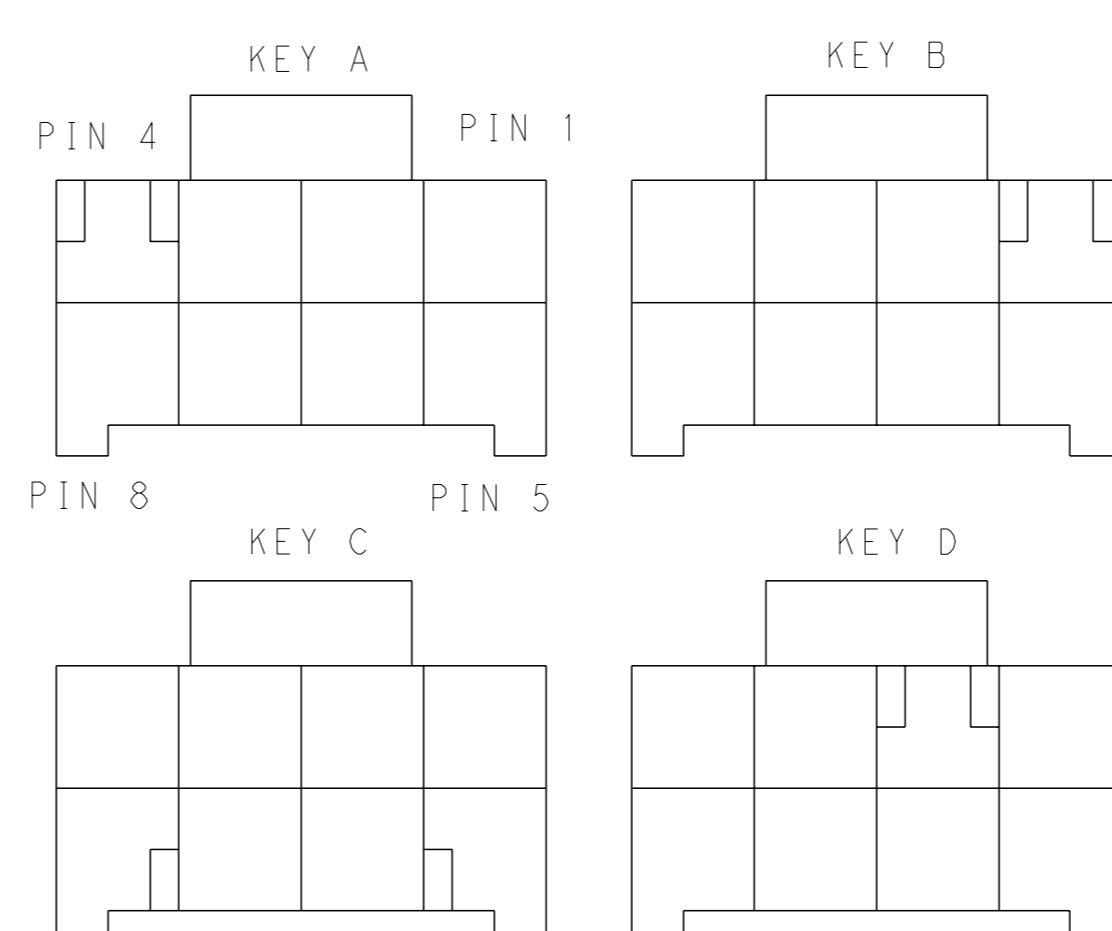


KEYING FOR 2\*4 POS.

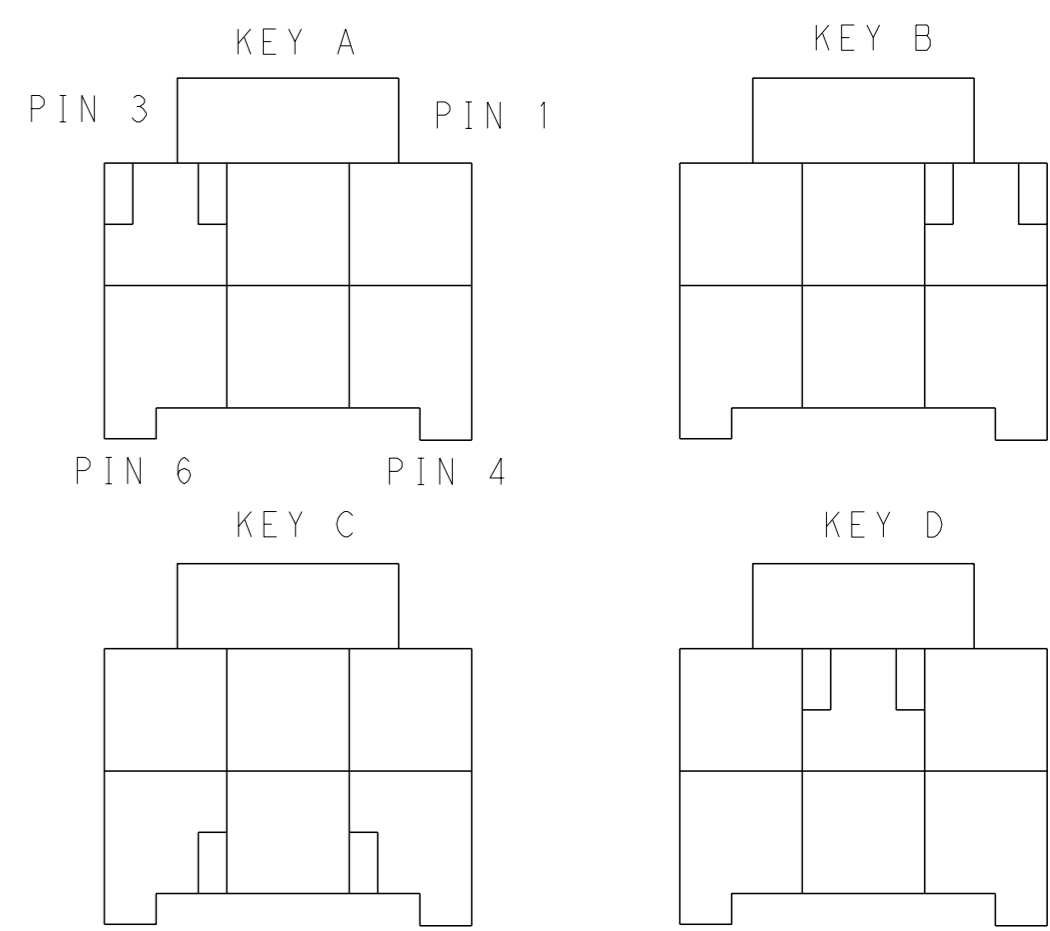

KEYING FOR 2\*3 POS.

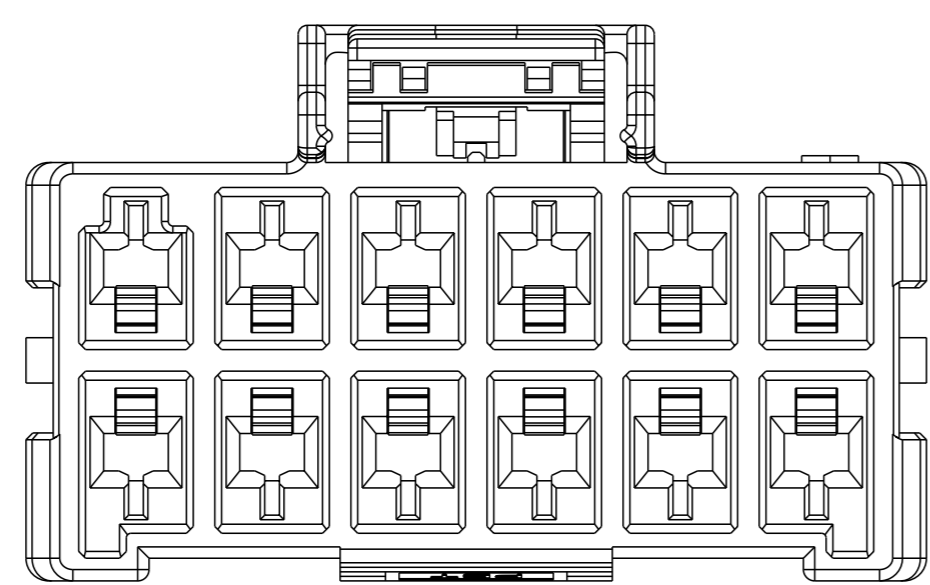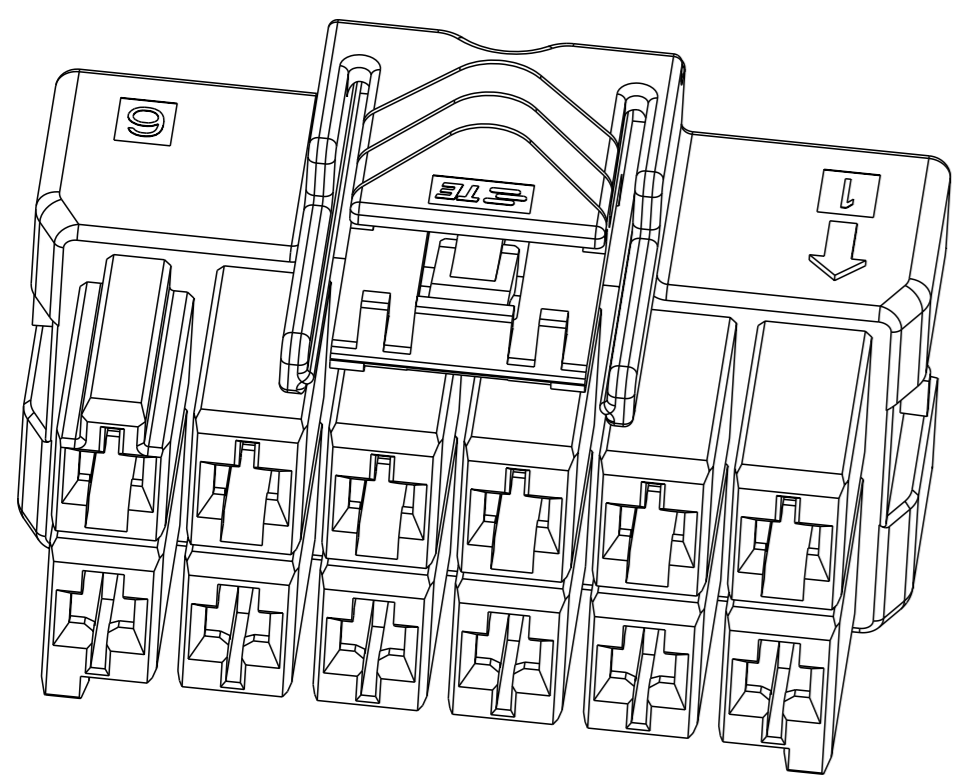

2\*6 POSITIONS

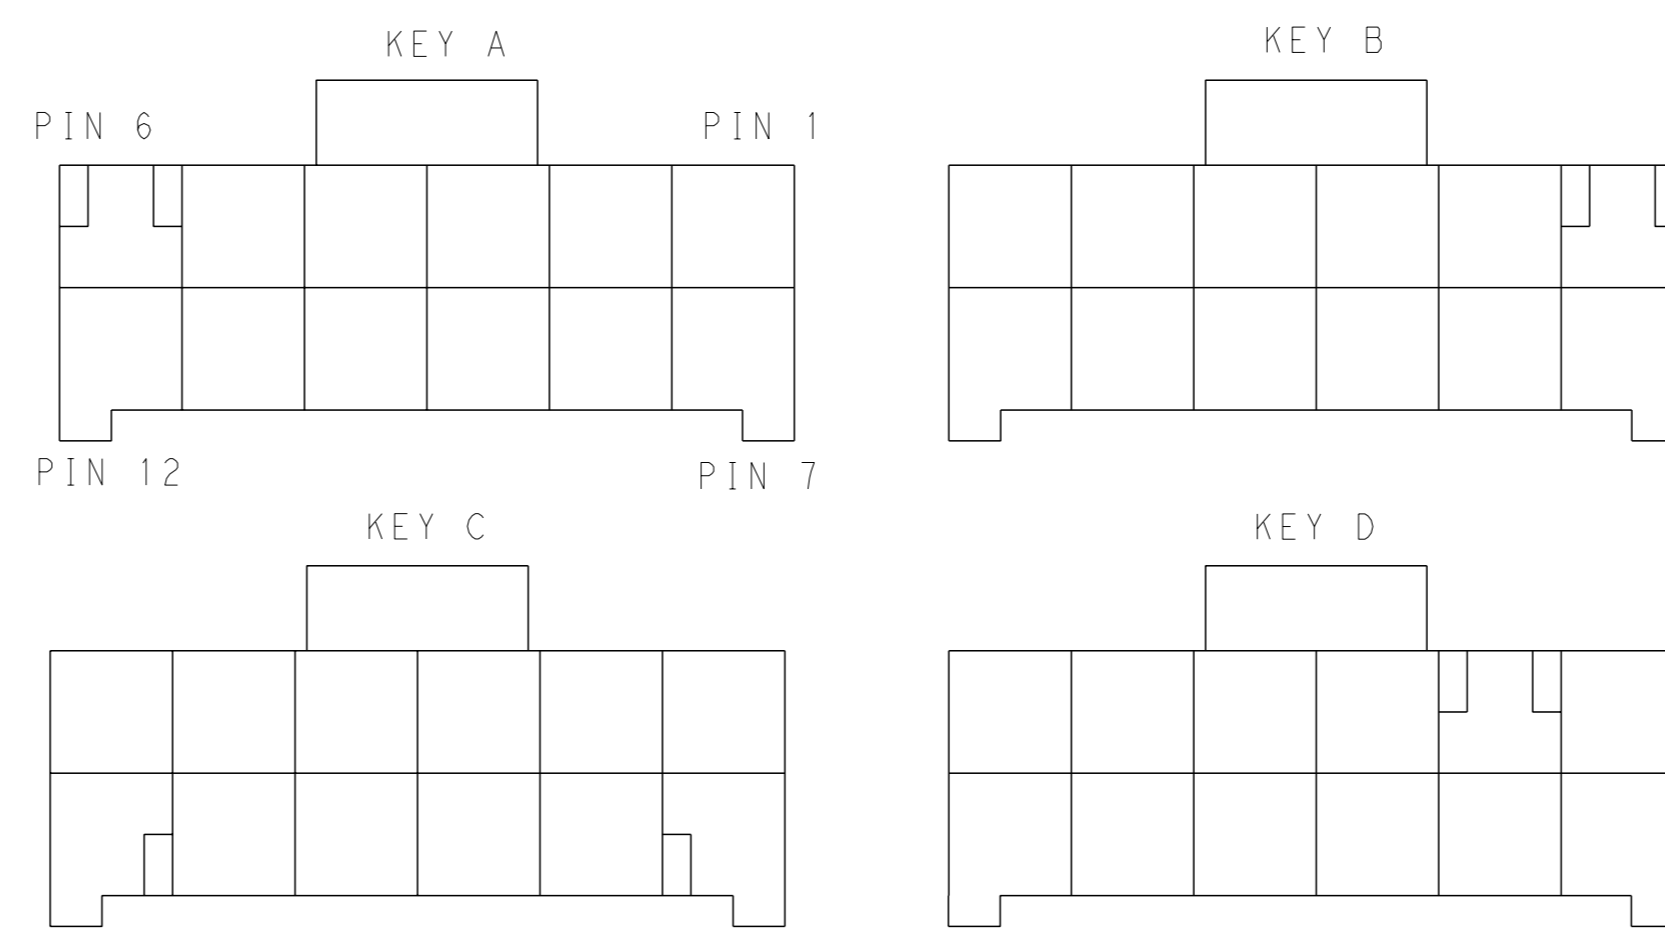

KEYING FOR 2\*6 POS.

POS.	MATERIAL	COLOR	KEY	P/N
2*6	LEVEL A	DARK GREY	KEY A	5-2232266-6
		BROWN	KEY B	6-2232266-6
		GREEN	KEY C	7-2232266-6
		ORANGE	KEY D	8-2232266-6
2*5	LEVEL A	DARK GREY	KEY A	5-2232266-5
		BROWN	KEY B	6-2232266-5
		GREEN	KEY C	7-2232266-5
		ORANGE	KEY D	8-2232266-5

POS.	MATERIAL	COLOR	KEY	P/N
2*4	LEVEL A	DARK GREY	KEY A	5-2232266-4
		BROWN	KEY B	6-2232266-4
		GREEN	KEY C	7-2232266-4
		ORANGE	KEY D	8-2232266-4
2*3	LEVEL A	DARK GREY	KEY A	5-2232266-3
		BROWN	KEY B	6-2232266-3
		GREEN	KEY C	7-2232266-3
		ORANGE	KEY D	8-2232266-3
2*3	LEVEL B	BLACK	KEY A	1-2232266-1
		BLACK	KEY A	1-2232266-1

THIS DRAWING IS A CONTROLLED DOCUMENT. OWN: TOMMY\_WU 26MAR2013  
 CHK: TOMMY\_WU 26MAR2013  
 APVD: HAPYE\_WU 26MAR2013  
 YIHONG\_MAO 26MAR2013

STE TE Connectivity  
 PLUG HOUSING, DOUBLE ROW  
 POWER TRIPLE LOCK

DIMENSIONS: mm  
 0 PLC ±  
 1 PLC ±0.35  
 2 PLC ±0.25  
 3 PLC ±  
 4 PLC ±  
 ANGLES FINISH ±

TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 PRODUCT SPEC: 108-106118  
 APPLICATION SPEC: 114-106118

MATERIAL: -  
 WEIGHT: -  
 Customer Drawing

SIZE: A1  
 CAGE CODE: 00779  
 DRAWING NO: C=2232266  
 RESTRICTED TO: -  
 SCALE: -  
 SHEET: 2 OF 2  
 REV: B2