


NOTES

- ALL DIMENSIONS ARE IN $\frac{\text{INCHES}}{\text{[MILLIMETERS]}}$
- DIMENSIONS APPEARING IN TABLE ARE AS FOLLOWS:
 a - AS SUPPLIED
 b - AFTER UNRESTRICTED RECOVERY
- COATING IS OPTIONAL. AS SUPPLIED DIMENSIONS APPEARING IN TABLE ARE FOR UNCOATED PARTS WHEN COATING IS ADDED, ENTRY DIAMETERS WILL BE REDUCED BY 0.06 MAX.
- RECOMENDED MAXIMUM PANEL THICKNESS IS 10mm

| REVISIONS | | | |
|-----------|---------------------------|------------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| F1 | REVISED PER ECO-14-014091 | 09/03/2014 | S TRAN |

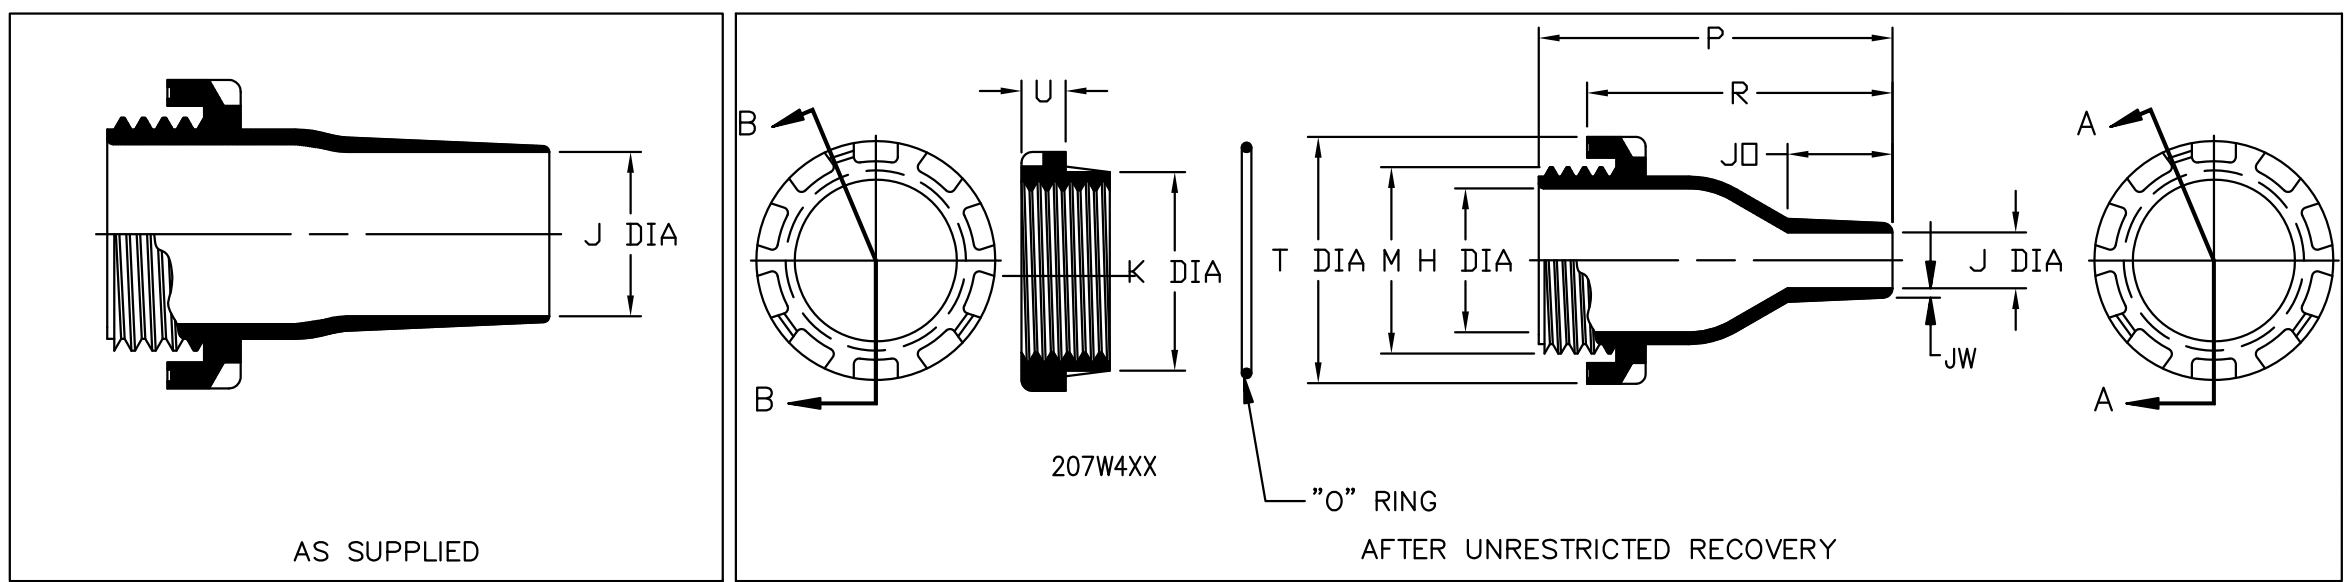

ORDERING INFORMATION

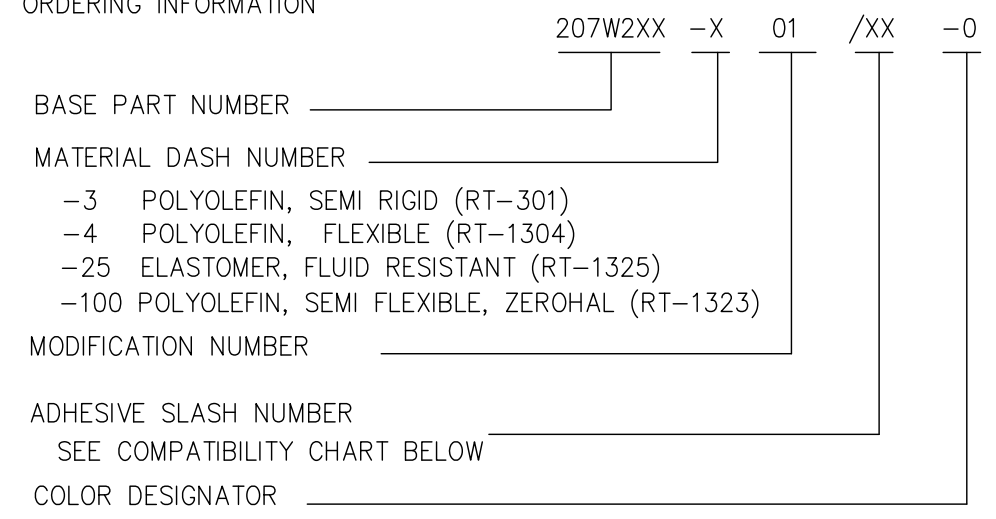


TABLE OF DIMENSIONS

| PART NUMBER | H | J | | J0 | K | M | P | R | U | T | JW | Hole DIA | Torque Nm |
|-------------|----------------|----------------|----------------|----------------|----------------|----------------|-----------------|-----------------|-----------------|----------------|-----------------|-------------------------|-----------|
| | Ref b | Min a | Max b | Max b | Ref b | THREAD b | $\pm 10\%$ b | $\pm 10\%$ b | $\pm 10\%$ b | Ref b | $\pm 20\%$ b | ± 0.02 ± 0.5 | |
| 207W213-01 | .47 [12,0] | .39 [10,0] | .15 [4,0] | .60 [15,3] | .90 [23,0] | .78 [20,0] | 2.44 [62,0] | 1.93 [49,0] | .39 [10,0] | 1.25 [32,0] | .04 [1,0] | .94 [24,0] | 3 |
| 207W223-01 | .78 [20,0] | .71 [18,0] | .27 [7,0] | .76 [19,5] | 1.30 [33,0] | 1.18 [30,0] | 2.83 [72,0] | 2.32 [59,0] | .39 [10,0] | 1.65 [42,0] | .07 [1,8] | 1.33 [34,0] | 8 |
| 207W234-01 | 1.22 [31,0] | 1.10 [28,0] | .47 [12,0] | 1.06 [27,0] | 1.81 [46,0] | 1.65 [42,0] | 3.42 [87,0] | 2.91 [74,0] | .39 [10,0] | 2.28 [58,0] | .10 [2,5] | 1.85 [47,0] | 11 |
| 207W245-01 | 1.77 [45,0] | 1.65 [42,0] | .71 [18,0] | 1.26 [32,2] | 2.34 [59,5] | 2.20 [56,0] | 4.01 [102,0] | 3.50 [89,0] | .39 [10,0] | 2.79 [71,0] | .12 [3,0] | 2.38 [60,5] | 14 |
| 207W258-01 | 2.67 [68,0] | 2.52 [64,0] | 1.18 [30,0] | 1.53 [39,0] | 3.30 [84,0] | 3.15 [80,0] | 4.80 [122,0] | 4.29 [109,0] | .39 [10,0] | 3.82 [97,0] | .12 [3,0] | 3.34 [85,0] | 16 |
| 207W264-01 | 1.57 [40,0] | 1.49 [38,0] | .59 [15,0] | 1.11 [28,3] | 2.12 [54,0] | 1.97 [50,0] | 3.74 [95,0] | 3.22 [82,0] | .39 [10,0] | 2.62 [66,5] | .10 [2,5] | 2.16 [55,0] | 11 |

If this document is printed it becomes uncontrolled. Check for the latest revision

| COMPATIBILITY CHART | | |
|---------------------|---------------------------------|-----------------------------|
| MATERIAL DASH NO. | ADHESIVE (COATING) SLASH NUMBER | ADHESIVE (COATING) S NUMBER |
| -3 | /42; /86; | S-1017 / S-1048 |
| -4 | /42; /86; | S-1017 / S-1048 |
| -25 | /86; /225 | S-1048 / S-1206 |
| -100 | /86; /180 | S-1048 / S-1030 |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE METRIC AND INCHES ARE IN BRACKETS.
 DECIMAL TOLERANCES
 XXX $\pm 0,13$ (.005)
 XX $\pm 0,25$ (.01)
 X $\pm 0,50$ (.10)
 ANGLE TOLERANCE
 .X ± 1 DEG.

DRAWN: MMAZARIEGOS DATE: 5/28/12
 APPROVED: D. HURRELL DATE: 5/30/12
 RPN: SEE TABLE
 CAD FILE: 207W213THRU264-01

THIRD ANGLE PROJECTION

TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.
 © 2014 Tyco Electronics Corporation. All rights reserved.

Raychem Molded Parts
CUSTOMER DRAWING

TE TE Connectivity

TITLE: FEEDTHROUGH SEAL

SIZE: B CODE IDENT. NO.: 06090 DWG. NO.: 207W213THRU264-01

SCALE: NTS DO NOT SCALE THIS DRAWING SHEET 1 OF 1