


222D285-3/86-0 Product Details

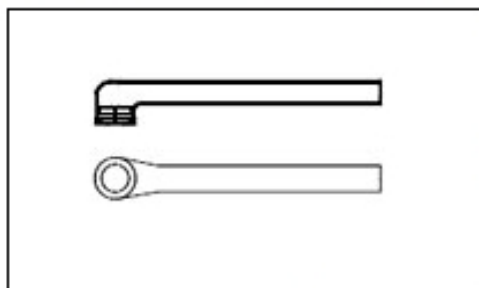

222D285-3/86-0

TE Internal Number: 353567N001

 **Active**

Molded Parts

 [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Molded Boot
- Family Name = 222D2
- 90°
- General Purpose Application
- Entry Size, Braided or Magneform Adapter = 28

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#)

[Request Sample](#)

[Find Similar Products](#)

[Buy Product](#)

Documentation & Additional Information

Product Drawings:

- [Boot, 90 deg., with Lip](#) (PDF, English)

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Molded Boot
- Size = 85
- Material = Semi rigid Modified Polyolefin

Electrical Characteristics:

- Angle = 90°

Body Related Features:

- Cable Diameter Range (mm [in]) = 17.50 - 39.10 [0.689 - 1.539]

Contact Related Features:

- [Family Name](#) = 222D2
- Entry Size, Braided or Magneform Adapter = 28
- Approved Standards = DEF Std 59-97 Issue 3 Type DA, MIL-I-81765/1 Class I, UL224 E85831

Housing Related Features:

- Entry Size, Tinel-Lock Adapter = 28
- Entry Size - Solid or Fixed Adapter = 22 - 24
- Entry Size - Spin Coupling Adapter = 24 - 28
- Adapter Entry Size Outside Diameter (Min-Max) (mm [in]) = 47.00 - 62.70 [1.850 - 2.468]
- [Material Systems Code](#) = 10
- Adhesive Pre-Coating = With
- Adhesive Description = High Performance Pre-Coat Adhesive

Configuration Related Features:

- Material Code = 3
- Adhesive Code = 86

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

Conditions for Usage:

- Operating Temperature (°C) = -55 - +120

Operation/Application:

- Application = General Purpose

Other:

- Brand = Raychem