

[Skip to content](#)

[Corporate Home](#) | [Electronic Components](#) | [Segments](#) | [Who We Are](#)

Worldwide



Our commitment. Your advantage.

Search

By:



[Sign In](#) | [Register \(Why Register?\)](#)

[Products](#)



- Connectors
- Electromechanical Components
- Electronic Modules
- Fiber Optics
- Filters
- Identification Labeling Products
- Passive Components
- Power Sources
- RF & Microwave Products
- Tooling Products
- Touch Screen Displays
- Tubing, Molded and Harnessing Products
- Wire, Cable and Cable Assemblies
- List all Product Types

- [Aerospace & Defense](#)
- [Appliance](#)
- [Automotive](#)
- [Communications](#)
- [Computer & Consumer Electronics](#)
- [Industrial & Commercial](#)
- [Instrumentation & Medical Equipment](#)

By Brand

A to Z

- [Documentation](#)
- [Find](#)
- [Documents & Drawings](#)
- [Find CAD Models](#)
- [SPICE/Electrical Models](#)
- [NAFTA Certificate of Origin](#)
- [White Papers](#)


- [Resources](#)
- [RoHS](#)
- [Compliance & Alternates](#)
- [Cross Reference Products](#)
- [Compare Multiple Products](#)
- [Check Distributor Inventory](#)
- [Find Authorized Distributors](#)

- [My Account](#)
- [Sign In](#)
- [Register](#)

- [Customer Support](#)
- [Support](#)
- [RoHS Support Center](#)
- [Glossary of Terms](#)
- [eBulletin Newsletter](#)

[Home](#) > [Products](#) > [By Type](#) > [Protection Products](#) > [Product Feature Selector](#) > Product Details

# D-181-2826-6/9 Product Details

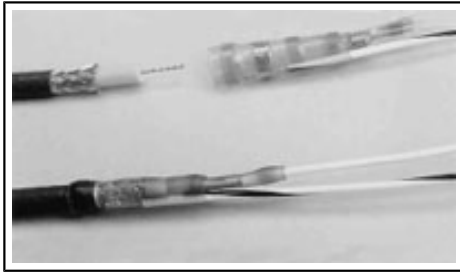

## D-181-2826-6/9

Raychem Part Number: 356303-000

 [Active](#)

## Shield Terminators

 [Always ELV Compliant \(Statement of Compliance\)](#)

### Product Highlights:

- Sealing = Splash Resistant
- Cable Temperature Rating = 125 °C
- Jacket Outer Diameter = 1.90 - 4.30 mm
- Shield O.D. (Min.) = 1.50 - 3.60 mm
- With Preinstalled Lead

[View all Features](#)

## Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

## Documentation & Additional Information

### Product Drawings:

- [Coaxial Solder Sleeve Device with Pre-installed Lead](#) (PDF, English)

### Catalog Pages/Data Sheets:

- None Available

### Product Specifications:

- None Available

### Application Specifications:

- None Available

### Instruction Sheets:

- None Available

### CAD Files:

- None Available

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)

[List all Documents](#)

## Product Features (Please use the Product Drawing for all design activity)

### Mechanical Attachment:

- Inside Diameter (mm [in]) = 4.50 [0.180]

### Body Related Features:

- [Jacket Outer Diameter \(mm \[in\]\)](#) = 1.90 – 4.30 [0.075 – 0.170]

### Housing Related Features:

- [Sealing](#) = Splash Resistant
- [Shield O.D. \(Min.\) \(mm \[in\]\)](#) = 1.50 – 3.60 [0.060 – 0.140]
- [Preinstalled Lead](#) = With
- Preinstalled Lead Wire Size (mm<sup>2</sup> [AWG]) = 0.15 [26]
- MIL or NAS Specification (MIL-S-83519) (NAS 1747) = No
- Length (Max.) (mm [in]) = 22.70 [0.895]

### Configuration Related Features:

- Temperature Indication System = Without

### Industry Standards:

- [RoHS/ELV Compliance](#) = ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was ELV compliant

### Conditions for Usage:

- [Cable Temperature Rating \(°C\)](#) = 125
- Operating Temperature (Max.) (°C) = 150

### Other:

- Brand = Raychem

[Provide Website Feedback](#) | [Contact Customer Support](#)

[Home](#) | [Customer Support](#) | [Suppliers](#) | [Site Map](#) | [Privacy Policy](#) | [Browser Support](#)

© 2007 Tyco Electronics Corporation All Rights Reserved