

## D-436-38CS2651 Product Details

**Detailed product features are not currently available online.**

Product features can often be found by referring to the available documents. [Contact us](#) for information about this product.

No Image Available

### D-436-38CS2651

 Always EU RoHS/ELV Compliant (Statement of Compliance)

### D-436-38CS2651

TE Internal Number:  
650076N003

 Active

#### Documentation & Additional Information

##### Product Drawings:

- [In-line Splice Sealing System, 1 to 1, SAE-AS81824/1 \(PDF, English\)](#)

##### Catalog Pages/Data Sheets:

- None Available

##### Product Specifications:

- None Available

##### Application Specifications:

- None Available

##### Instruction Sheets:

- None Available


##### CAD Files:

- None Available


##### Related Products:

- [Tooling](#)

## CUSTOMER DRAWING

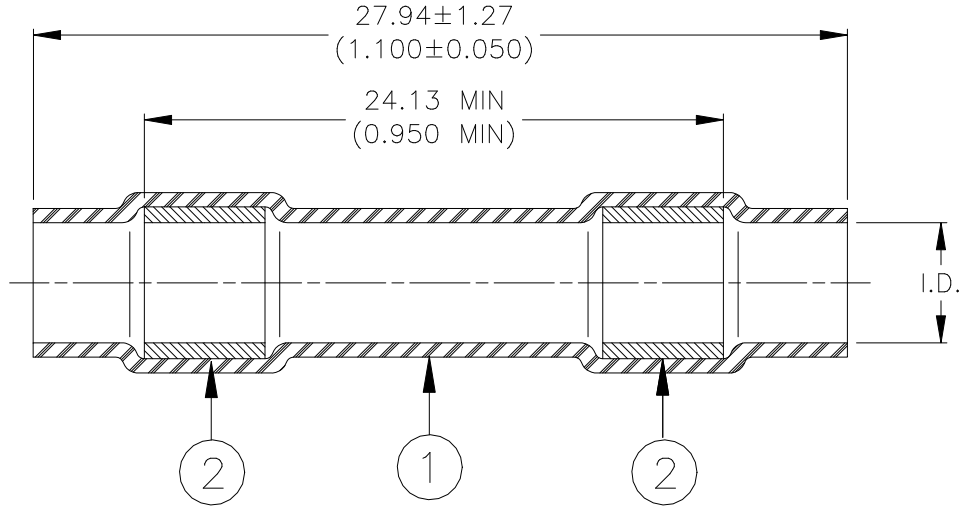

## SEALING SLEEVE

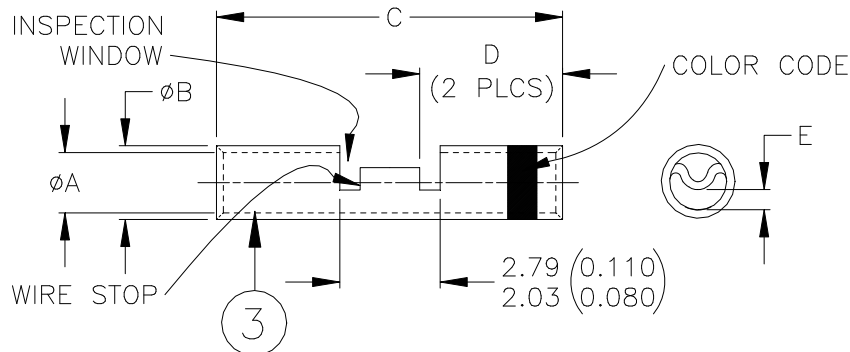

## METAL CRIMP SPLICE

Product Rev		I.D.* a (min) b (max)	Product Dimensions				
Product Name			A	B	C	D	E max
D-436-36	A	<u>2.16 (0.085)</u>	<u>1.27 (0.050)</u>	<u>2.03 (0.080)</u>	<u>12.95 (0.510)</u>	<u>6.22 (0.245)</u>	0.38 (0.015)
		0.64 (0.025)	1.14 (0.045)	1.91 (0.075)	12.45 (0.490)	5.72 (0.225)	
D-436-37	A	<u>2.79 (0.110)</u>	<u>1.75 (0.069)</u>	<u>2.69 (0.106)</u>	<u>14.86 (0.585)</u>	<u>7.11 (0.280)</u>	0.51 (0.020)
		0.64 (0.025)	1.63 (0.064)	2.57 (0.101)	14.35 (0.565)	6.60 (0.260)	
D-436-38	A	<u>4.32 (0.170)</u>	<u>2.59 (0.102)</u>	<u>3.89 (0.153)</u>	<u>14.86 (0.585)</u>	<u>7.11 (0.280)</u>	1.27 (0.050)
		0.64 (0.025)	2.46 (0.097)	3.73 (0.147)	14.35 (0.565)	6.60 (0.260)	

\* I.D.: a) As received; b) After unrestricted recovery thru meltable insert.

© 2013 TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.

<b>TE</b> TE Connectivity		<b>Raychem</b> Devices	TITLE: <b>IN-LINE SPLICE SEALING SYSTEM, 1 TO 1 SAE AS81824/1</b>		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: <b>D-436-36/-37/-38</b>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DATE: <b>02-21-2013</b>	REVISION: <b>C</b>	
DRAWN BY: <b>T.NGUYEN</b>	ECO NUMBER: <b>ECO-13-003156</b>		SCALE: <b>N/A</b>	SIZE: <b>A</b>	SHEET: <b>1 of 2</b>

If this document is printed it becomes uncontrolled. Check for the latest revision.

# CUSTOMER DRAWING

## MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING RINGS: Immersion resistant thermoplastic. Color: one clear, one color coded (see table below).
3. CRIMP SPLICER:
  - Base Metal: Copper alloy 101 or 102 per ASTM B-75.
  - Plating: Tin, per ASTM B545
  - Color code: See table below.

Product Name	MIL Spec Equivalent	Wire Range (AWG)	Color Code	Wgt. - Lbs/Mpc max
D-436-36	M81824/-1-1	26 - 20	RED	1.02
D-436-37	M81824/-1-2	20 - 16	BLUE	1.61
D-436-38	M81824/-1-3	16 - 12	YELLOW	2.720


## APPLICATION

1. These parts are designed to provide immersion resistant in-line splices of 1 to 1 wires falling within size range listed above, and having insulations rated for 135°C.
2. Parts will meet all requirements of SAE AS81824/1 when installed as outlined below. Assembly is not required for acceptance testing inspection.
3. Acceptance sampling shall be in accordance with Paragraph 4.6.1 of SAE AS81824.
4. Packing and packaging shall be in accordance with Sections 5, Level C, of SAE AS81824.
5. This document takes precedence over documents reference herein.

## ASSEMBLY PROCEDURE:

1. Slide sealing sleeve onto one of the wires to be spliced.
2. Strip wires 5/16" to 11/32".
3. Insert one wire into barrel of crimp splicer and crimp using a Raychem AD-1377 crimp tool. Repeat for other wire.
4. Center sealing sleeve over the splice.
5. Apply heat, using an approved heat source, first to one of the inserts and then the other. Heat should be applied until insert melts and flows axially along the wire.

© 2013 TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.

 <b>TE Connectivity</b>		<b>Raychem</b> Devices	TITLE: <b>IN-LINE SPLICE SEALING SYSTEM, 1 TO 1 SAE AS81824/1</b>		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: <b>D-436-36/-37/-38</b>		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A  ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.	DATE: <b>02-21-2013</b>	REVISION: <b>C</b>	
DRAWN BY: <b>T.NGUYEN</b>	ECO NUMBER: <b>ECO-13-003156</b>		SCALE: <b>N/A</b>	SIZE: <b>A</b>	SHEET: <b>2 of 2</b>

If this document is printed it becomes uncontrolled. Check for the latest revision.