

CGPE - 105
Flexible, Commercial Grade, Polyolefin,
Heat-Shrinkable Tubing

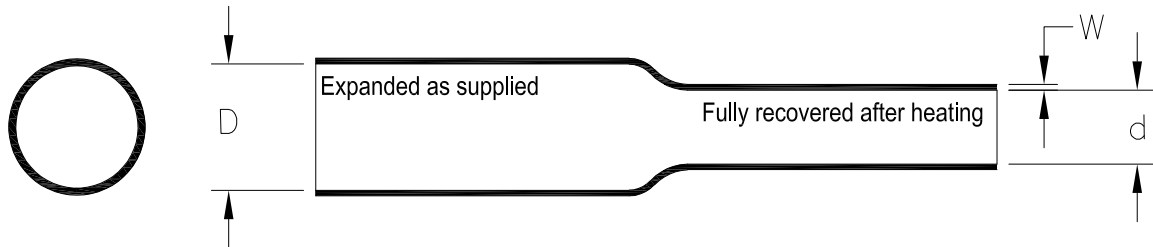


Table 1: Dimensions mm(*inches*)

| Size | As Supplied | | Recovered | | | | | | | |
|-------|-----------------------------|------------|-----------------------------|------------|--------------------|------------|---------|------------|---------|------------|
| | Inside Diameter Minimum (D) | | Inside Diameter Maximum (d) | | Wall Thickness (W) | | | | | |
| | mm | <i>in.</i> | mm | <i>in.</i> | Minimum | | Maximum | | Nominal | |
| | mm | <i>in.</i> | mm | <i>in.</i> | mm | <i>in.</i> | mm | <i>in.</i> | mm | <i>in.</i> |
| 3/64 | 1.17 | .046 | 0.58 | .023 | 0.33 | .013 | 0.48 | .019 | 0.40 | .016 |
| 1/16 | 1.60 | .063 | 0.79 | .031 | 0.35 | .014 | 0.50 | .020 | 0.43 | .017 |
| 3/32 | 2.36 | .093 | 1.17 | .046 | 0.43 | .017 | 0.58 | .023 | 0.50 | .020 |
| 1/8 | 3.17 | .125 | 1.57 | .062 | 0.43 | .017 | 0.58 | .023 | 0.50 | .020 |
| 3/16 | 4.74 | .187 | 2.36 | .093 | 0.43 | .017 | 0.58 | .023 | 0.50 | .020 |
| 1/4 | 6.35 | .250 | 3.17 | .125 | 0.56 | .022 | 0.71 | .028 | 0.64 | .025 |
| 3/8 | 9.50 | .375 | 4.74 | .187 | 0.56 | .022 | 0.71 | .028 | 0.64 | .025 |
| 1/2 | 12.70 | .500 | 6.35 | .250 | 0.56 | .022 | 0.71 | .028 | 0.64 | .025 |
| 3/4 | 19.05 | .750 | 9.50 | .375 | 0.69 | .027 | 0.84 | .033 | 0.76 | .030 |
| 1 | 25.40 | 1.000 | 12.70 | .500 | 0.76 | .030 | 1.01 | .040 | 0.88 | .035 |
| 1-1/2 | 38.10 | 1.500 | 19.05 | .750 | 0.86 | .034 | 1.17 | .046 | 1.01 | .040 |
| 2 | 50.80 | 2.000 | 25.40 | 1.000 | 0.96 | .038 | 1.32 | .052 | 1.14 | .045 |


For More Details See CGPE - 105 Specification, TEC - 108 - 120008

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.

© COPYRIGHT 2017 CGPE-105

| | | | | | | | | | | | |
|---|------------------|----------------|--|----|---|-------|------------|----------|---------------|--------|-----|
| DIMENSIONS: mm | DWN | 07-JUNE-17 |  | | TE Connectivity 305 Constitution Drive Menlo Park, CA 94025 USA | | | | | | |
| | J. Bitter | | | | | | | | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK | - | NAME CGPE - 105 Flexible, Commercial Grade, Polyolefin, Heat - Shrinkable Tubing | | | | | | | | |
| | APVD | - | | | | | | | | | |
| 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - | PRODUCT SPEC | TEC-108-120008 | SIZE | A4 | CAGE CODE | 06090 | DRAWING NO | CGPE-105 | RESTRICTED TO | - | |
| | APPLICATION SPEC | - | WEIGHT | 0 | CUSTOMER DRAWING | | SCALE | None | SHEET | 1 OF 1 | REV |