


CUSTOMER DRAWING

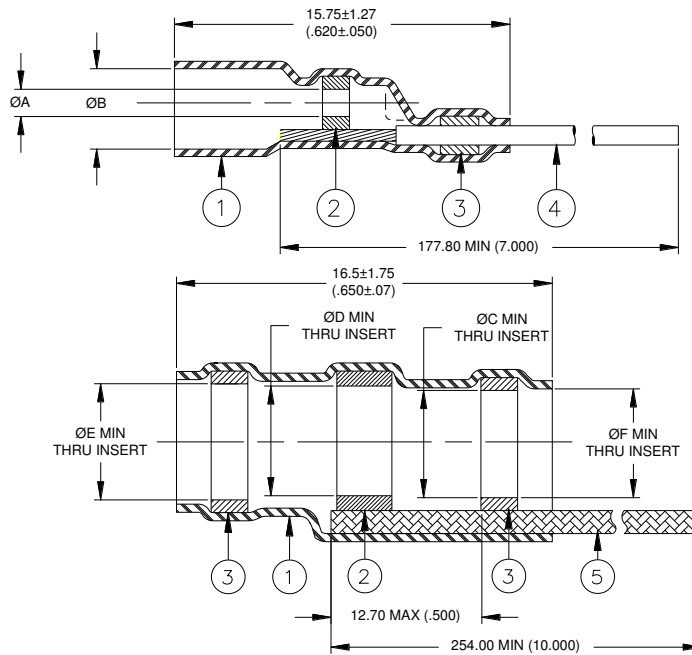


Product Name	Product Dimensions					
	Ø A min.	Ø B min.	Ø C min.	Ø D min.	Ø E min.	Ø F min.
D-183-0037	0.71 (0.028)	2.34 (0.092)	2.67 (0.105)	3.18 (0.125)	3.68 (0.145)	2.41 (0.095)
D-183-0038	1.12 (0.044)	3.05 (0.120)	3.43 (0.135)	3.68 (0.145)	4.45 (0.175)	2.92 (0.115)
D-183-0039	1.25 (0.049)	3.94 (0.155)	4.45 (0.175)	4.70 (0.185)	5.21 (0.205)	3.94 (0.155)

MATERIALS

- INSULATION SLEEVES: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- SOLDER PREFORMS WITH FLUX:
SOLDER: TYPE Sn63 per ANSI-J-STD-006.
FLUX: TYPE ROL1 per ANSI-J-STD-004.
- SEALING RINGS: Fluorocarbon-based thermoplastic.
- CONDUCTOR LEAD: MIL-W-22759/32-22-9 (Raychem 55A0111-22-9)
- GROUND LEAD: Tin-plated copper braid.

APPLICATION

- This part is designed to provide an environmentally resistant termination of the shield and conductor of coaxial cables meeting the following parameters:
 Temperature Rating: 125°C minimum
 Conductor: Plating: Tin or Silver plated Copper
 Gauge: 30 to 24
 Dielectric Diameter: 0.89 to 3.00 (0.035 to 0.118)
 Shield: Plating: Tin or Silver plated Copper
 Diameter: 1.52 to 3.56 (0.060 to 0.140)
 Jacket Diameter: 1.91 to 4.32 (0.075 to 0.170)
- For Installation Procedure and Inspection Criteria, see Raychem Process Standard RCPS-200-36.
- These parts will meet the requirements of Raychem Specification RT-1404.

		Raychem DEVICES		TITLE: COAXIAL CABLE TERMINATION, HIGH TEMPERATURE: GROUND: TIN PLATED BRAID; CONDUCTOR: M22759/32-22-9	
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: D-183-0037/-0038/-0039	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		REV: C	DATE: 30-Mar-2020
DRAWN BY: M. FORONDA	DATE: 29-MAY-01	ECO: ECO-20-004510	SCALE: NTS	SIZE: A	SHEET: 1 of 1

© 2020 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

TE Connectivity, TE connectivity (logo), Raychem, SolderSleeve are trademarks