


REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE SEE ECO-18-007691	5/16/2018	L.RODRIGUEZ

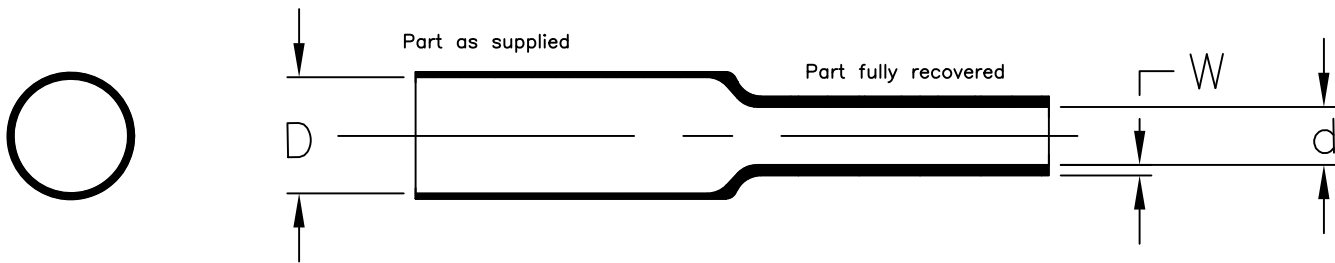

SIZE	ID ϕ AS SUPPLIED	ID ϕ AS RECOVERED	RECOVERED WALL THICKNESS
	D MINIMUM	d MAXIMUM	AFTER HEATING (NOM)
1/16	1.58 (.63)	0.79 (.031)	0.30 (.012)
1/8	3.18 (.125)	1.57 (.062)	0.30 (.012)
3/16	4.75 (1.87)	2.36 (.093)	0.36 (.014)
1/4	6.35 (.250)	3.18 (.125)	0.41 (.016)
3/8	9.53 (.375)	4.75 (.187)	0.48 (.019)
1/2	12.70 (.500)	6.35 (.250)	0.48 (.019)
5/8	15.88 (.625)	7.95 (.312)	0.56 (.022)
3/4	19.05 (.750)	9.53 (.375)	0.69 (.027)
1	25.40 (1.000)	12.70 (.500)	0.79 (.031)
1 1/4	31.75 (1.250)	15.88 (.625)	0.84 (.033)
1 1/2	38.10 (1.500)	19.05 (.750)	0.94 (.037)
2	50.80 (2.000)	25.40 (1.000)	1.02 (.040)

NOTES:

1. THIS PRODUCT IS DESIGNED FOR A WIDE RANGE OF APPLICATIONS, AND MEETS THE PERFORMANCE REQUIREMENTS OF TE SPECIFICATION RT-555.
2. PACKAGED AND SUPPLIED ON A SPOOL AND LABELED WITH (example: RT-555-3/8-0), PART NUMBERING SYSTEM: RT-555= PART NUMBER, 3/8= ORDER SIZE, -0= BLACK (STANDARD COLOR).
3. ALWAYS ORDER THE LARGEST SIZE THAT WILL SHRINK SNUGLY OVER THE COMPONENT TO BE COVERED.
4. FOR MATERIAL AND FINISH INFORMATION REFER TO RT-555 SPECIFICATION. FOR SPECIAL ORDER SIZES, CONTACT TE CONNECTIVITY.

Raychem Harness & Components **CUSTOMER DRAWING**
 © 2018 TE Connectivity Corporation. All rights reserved.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, AND INCH DIMENSIONS ARE IN SHOWN IN (PARENTHESES).		
DECIMALS: .000 ± 0.000 .00 ± 0.00 .0 ± 0.0	ANGLES: ± 0° 00'	
TYCO ELECTRONICS RESERVES THE RIGHT TO AMEND THIS DRAWING AT ANYTIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.		TITLE: RT-555 HEAT SHRINK TUBING FLEXIBLE, ABRASION RESISTANT FLAME RETARDANT
		DRAWING NO: RT-555
DRAWN: 15MAY2018 G.ROSITANO	CHECKED: 15MAY2018 L.R.	APPROVED: 16MAY2018 L.RODRIGUEZ
CAGE CODE 06090	CAD FILE: RT-555_cd	SIZE: A
		SCALE:
		THIRD ANGLE PROJ.
		SHEET: 1_OF_1