


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---|------|-----------------|
| 1 | 50-00133 | Connector, dc plug, 5.5x2.1x18.5 mm, molding style, spring contacts | 1 | |
| 2 | 30-00680 | Wire, 2C TS, 16 AWG, UL2464, 300V, 80C, 6.1 mm, VW-1, PVC | 1 | |
| 3 | 24-00185 | Overmold, dc plug, 5.5 mm, 90°, Tensility | 1 | PVC, black |

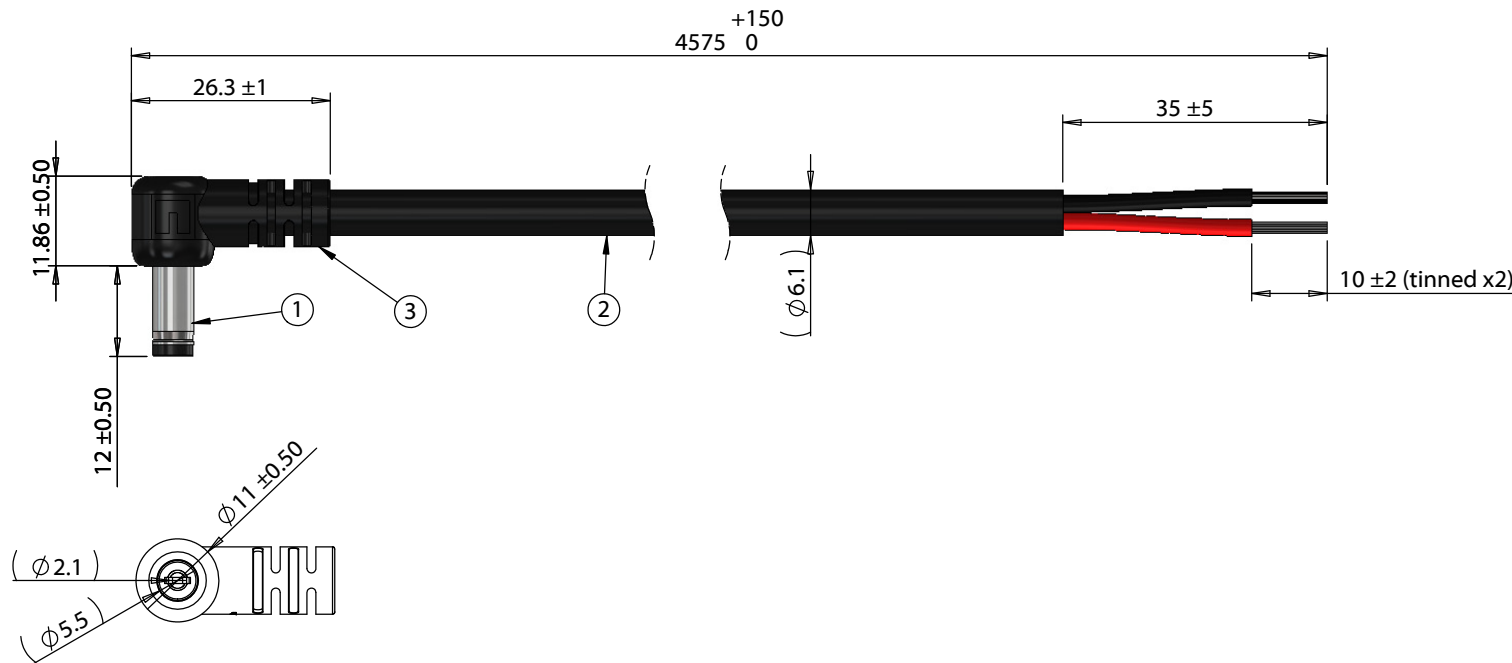

| Wiring Diagram | |
|----------------|------------|
| 50-00133 | wire color |
| center | red |
| sleeve | black |

Notes:
Functionally equivalent components may be substituted

| | | | | | |
|-----------|------------|-----------------|--|--|--|
| Revision: | Date: | Description: | Prepared: | Notes: RoHS compliant Function test: no open, no short circuit, no intermittent | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 06/06/2019 | Initial release | Verified: | | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 4575 mm, 5.5x2.1x12 mm 90° 50-00133 dc plug to stripped tinned, 16 AWG, 30-00680 wire | Size: A |
| | | | | | Part number: 10-03355 |
| | | | | | Scale: 1:1 |
| | | | | | Sheet 1 of 1 |

5

4

3

2

1