


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

LTR	DESCRIPTION	DATE	BY
-	Released	3/25/96	JCL
A	Redrawn and Updated	7/8/04	JCL

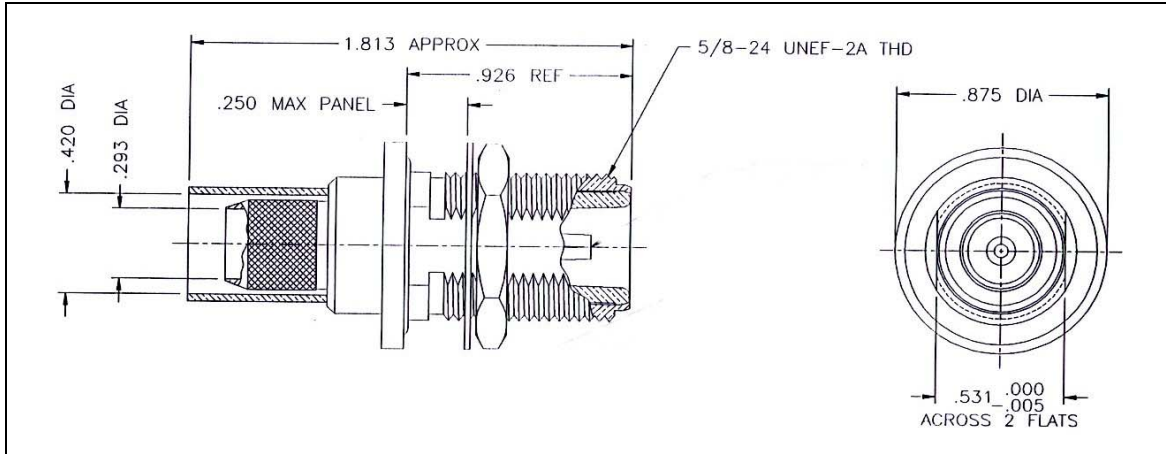

**I. MATERIALS & FINISHES**

center contact: Gold Plated Beryllium Copper  
 outer contact: Nickel Plated Brass  
 body: Nickel Plated Brass  
 crimp sleeve: Nickel Plated Copper  
 dielectric: Teflon® PTFE  
 gasket: Silicone Rubber  
 shrink sleeve: Adhesive Lined Polyolefin  
 attachment: braid crimp .429" hex

**II. ELECTRICAL PROPERTIES**

impedance: 50 ohms  
 working voltage: 1000 vrms (max)  
 vswr: 1.25:1 (max) up to 2 GHz  
 insertion loss: 0.15 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JCL	3/25/96

**TIMES MICROWAVE SYSTEMS**  
 Wallingford, CT 06492  
 (203) 949-8400; (203) 949-8423.Fax  
 www.timesmicrowave.com

**EZ-400-NF-BH**  
 Type-N female Bulkhead  
 for LMR-400 Cable

Size A	CAGE CODE <b>68999</b>	Drawing No.: <b>3190-518</b>
Scale: NA	Rev. (A)	Sheet: 1 of 1