
VECTOR

Non EMC DIN-Based VectorPaktmSubracks

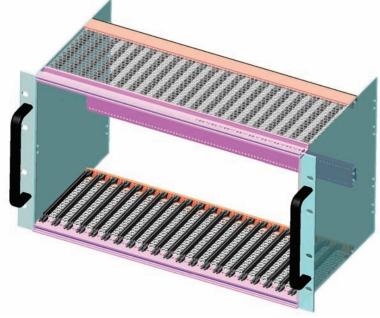

Vector subrack packaging for 19" systems offers a versatile and comprehensive solution to your packaging needs. Based on DIN 41914, all parts conform to a system which allows your unique design to be constructed from a combination of standards. You may mix different module sizes and add accessories without the need for special designs. Subracks and accessories are available "off the shelf", affording you short lead times for on time completion of your project.

COMPLETE DIN SUBRACKS FULLY ASSEMBLED OR KITS

<u>CCK</u> Card Cage (subrack) frame only kit including sidewalls, front, rear and rear-center extrusions, all nut strips, backplane insulators and assembly instructions. CG1-series VectorPaktm card guides <u>sold</u> <u>separately.</u> Guide positions are variable at 1HP (0.200") horizontal increments. <u>**CCA**</u> Card cage (subrack) frame only described above, but factory assembled.

CG1-series VectorPaktm card guides sold separately

	DIN-Ba	ased Metric Subr	ack Ordering Information
SYSTEM PACKAGING PRODUCTS	<u>CCK</u>	- <u>160</u>	<u>3U</u>
SYSTEM PACKAGING PRODUCTS INCLOSUMES ANGRYANES NOTIN SUPPLES SUBACKS EXTINUER BOARDS			Rack Height
SUBAACS SUBAACS INDOTYFING PRODUCTS SYSTEM INTEGRATION DESIGN GERVICES	Model Type		3U = 5.25"H x 19.0"W
	CCK- Card cage	frame kit	6U = 10.50"H x 19.0"W
	CCA- Factory Ass	sembled	9U = 15.75"H x 19.0"W
VectorPak ^t Kit (CCK)	/	Card Depth	Standard Card Heights
		-	· ·
1	NAME OF A DESCRIPTION O	160 -160mm, 6.299	
		220 -220mm, 8.66"	6U = 233.35mm (9.187")
•		280- 280mm, 11.02	." 9U = 366.70mm (14.437")
		340- 340mm, 13.39	⁷⁷
•	-	400- 400mm, 15.75	"
1			
•			•
·		•	-
•		and the second second	
Land the second s			it pit-
CCA160-6U shown with 1 p	or. of		
CG1-160 card guides instal	led		
		CCA160-3U show CG1-160 card gui	•
34 www.vectorelect.com			
www.vectorelect.com	Specification subject t	to change without notice	800-423-5659