




## Edgeboard Connectors, Dual Readout

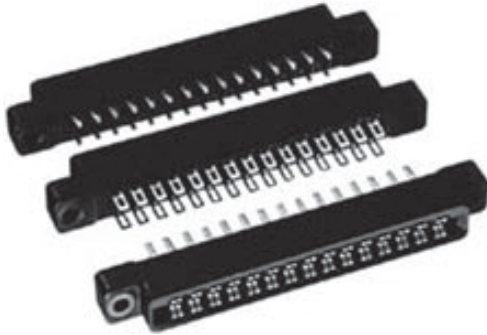

### ELECTRICAL SPECIFICATIONS

**Current Rating:** 5 amps.

**Test Voltage Between Contacts:**

At sea level: 1800VRMS.

At 70,000 feet [21,336 meters]: 450VRMS.

**Insulation Resistance:** 5000 Megohm minimum at 500VDC potential.

**Contact Resistance:** 30 millivolts maximum at rated current (with gold plating).

**Operating Temperature:** - 55°C to + 125°C.

**Humidity:** 96 hours at 90% relative humidity at + 40°C, dried at room temperature for 3 hours minimum, insulation resistance 5000 Megohm.

**Durability:** (With gold plating.) After 500 cycles of insertion and withdrawal of 0.070" [1.78mm] thick steel test gauge, contact resistance less than 0.030V at 5 amps and individual contact retention force when measured with a 0.054" [1.37mm] thick steel test pin greater than 1/2 ounce.

**Shock:** Three 50g shocks in each of 3 mutually perpendicular planes with no loss of continuity.

**Vibration:** 2 hours in each of 3 mutually perpendicular planes, frequency sweep 10 to 55cps at 0.06 double amplitude with no loss of continuity.

### FEATURES

- 0.156" C-C x 0.200" grid [3.96mm x 5.08mm].
- Greater design latitude.
- 3 body materials: Diallyl phthalate, phenolic and glass-filled polyester.
- 6 contact termination styles.
- 8 body sizes.
- 7 mounting styles.
- Bifurcated bellows contacts provide 2 flexing contact surfaces to assure positive contact.
- Accepts PC board thickness of 0.054" - 0.071" [1.37mm -1.80mm].
- Polarization between contact positions in all sizes.
- Selective gold plating.
- **Recognized under the Component Program of Underwriters Laboratories, Inc. Listed under File E65524, Project 77CH3889.**

### APPLICATIONS

For use with 0.062" [1.57mm] printed circuit boards requiring an edgeboard type connector on .156" [3.96mm] centers.

### PHYSICAL SPECIFICATIONS

**Contact Type:** Bifurcated bellows.

**Number of Contacts:** 6, 10, 12, 15, 18, 22, 24, 25 per side.

**Contact Spacing:** 0.156" [3.96mm] center to center.

**Card Thickness:** 0.054" to 0.071" [1.37mm to 1.80mm].

**Card Slot Depth:** 0.330" [8.38mm], dual readout.

### MATERIAL SPECIFICATIONS

**Body:**

"1" glass-filled diallyl phthalate per MIL-M-14, Type SDG-F green, flame retardant (UL 94V-0).

"2" glass-filled phenolic per MIL-M-14, Type MFH dark green, flame retardant (UL 94V-0).

"3" thermoplastic polyester, glass-filled, black, flame retardant (UL 94V-0).

"5" thermoplastic polyphenylene sulfid, glass-filled, brown, flame retardant (UL 94V-0).

**Contacts:** Phosphor bronze.


**Polarizing Key:** Glass reinforced nylon, flame retardant (UL 94V-0).

**Contact Plating:** Gold (See Ordering Information).


**NOTE:** High temperature burn-in, edgeboard connectors, 0.156" [3.96mm] center to center are on page 20 of this catalog.




### ORDERING INFORMATION

EB8 MODEL	1 BODY MATERIAL	B OPTIONAL CONTACTS	A STANDARD TERMINAL VARIATIONS	22 CONTACTS	SG CONTACT PLATING	X MOUNTING VARIATIONS	A POLARIZING KEY POSITIONS
	Optional Body Material 1 = Diallyl Phthalate 2 = Phenolic 3 = Glass-filled Polyester 5 = Glass-filled Polyphenylene Sulfid	Beryllium Copper contacts optional. Available in "A" and "E" contact styles only. (Omit for standard.)	A, C, D, K, L or E	6, 10, 12, 15, 18, 22, 24 or 25	SG = Selective Gold Plating (0.00003" [0.000762mm] minimum thick) on contact area with Gold Flash on terminal. SGF = Selective Gold Plating (0.00001" [0.000254mm] minimum thick) on contact area with Gold Flash on terminal. All Gold Plating over 0.00005" [0.00127mm] minimum Nickel Underplate. Contact factory for additional plating options.		Key(s) are located to right of position(s) designated. Required only when polarizing keys are to be factory installed.

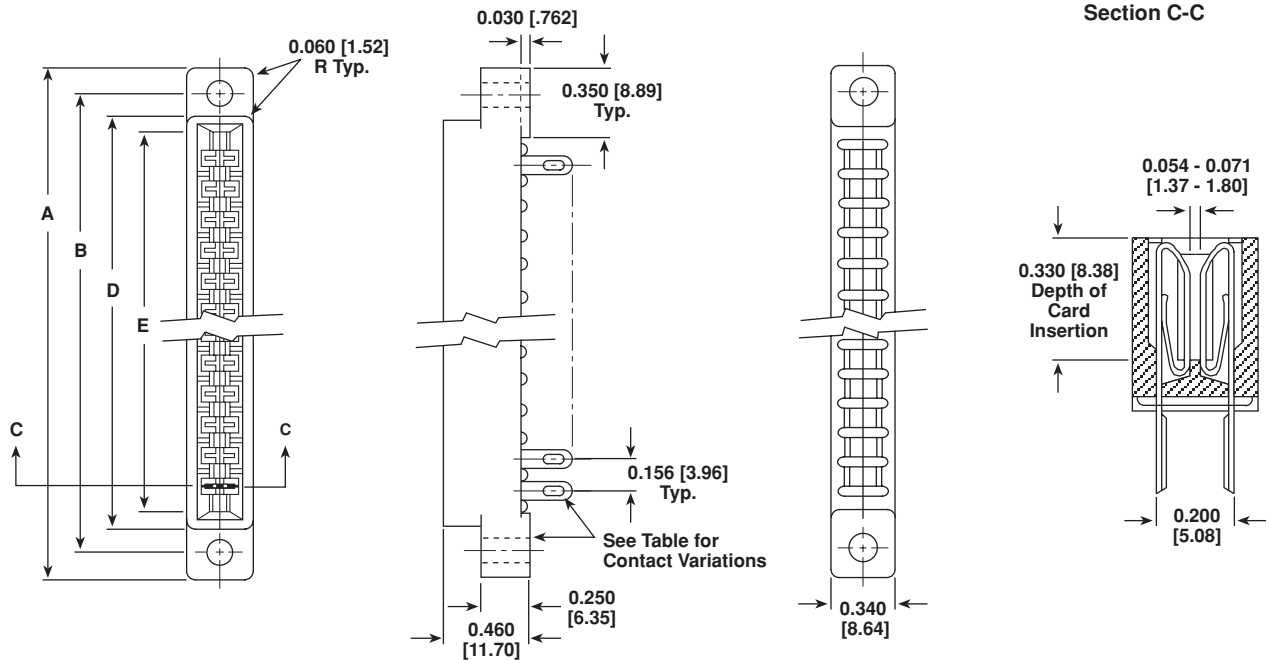**DIMENSIONS** in inches [millimeters]


# OF CONTACT POSITIONS	A	B	D	E
6	1.78 [45.21]	1.531 [38.89]	1.240 [31.50]	1.100 [27.94]
10	2.41 [61.21]	2.156 [54.76]	1.864 [47.35]	1.724 [43.79]
12	2.72 [69.09]	2.469 [62.71]	2.176 [55.27]	2.036 [51.71]
15	3.19 [81.03]	2.937 [74.60]	2.644 [67.16]	2.504 [63.60]
18	3.66 [92.96]	3.406 [86.51]	3.112 [79.05]	2.972 [75.49]
22	4.28 [108.71]	4.031 [102.39]	3.736 [94.89]	3.596 [91.34]
24	4.59 [116.59]	4.344 [110.33]	4.051 [102.89]	3.911 [99.34]
25	4.75 [120.65]	4.500 [114.30]	4.207 [106.86]	4.067 [103.30]

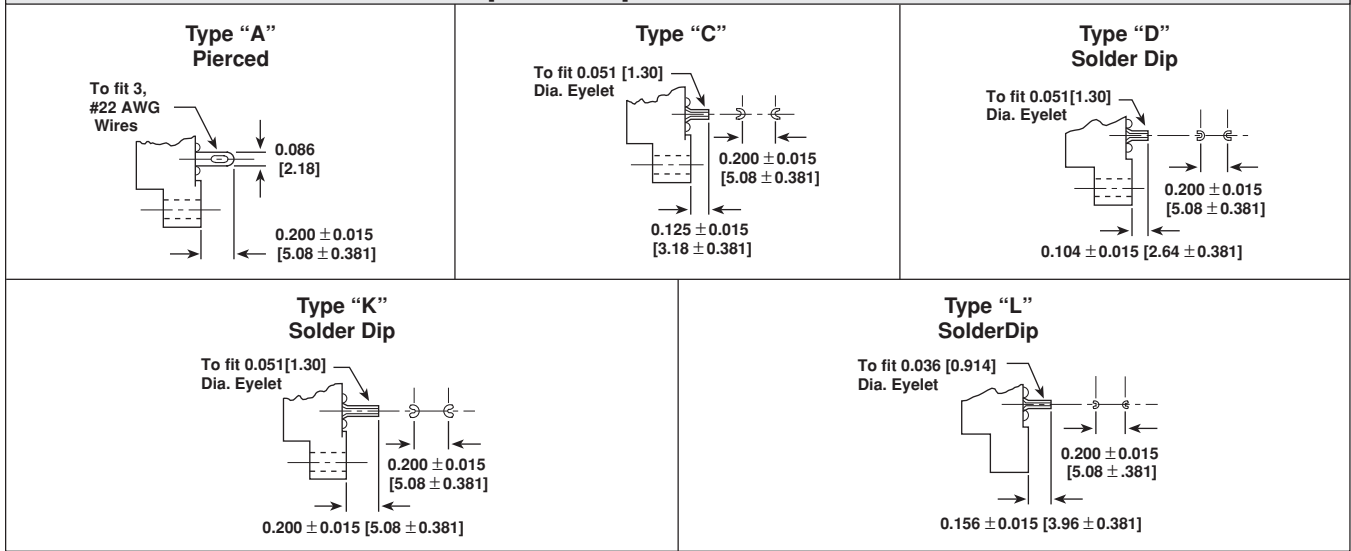**TERMINAL VARIATIONS** in inches [millimeters]

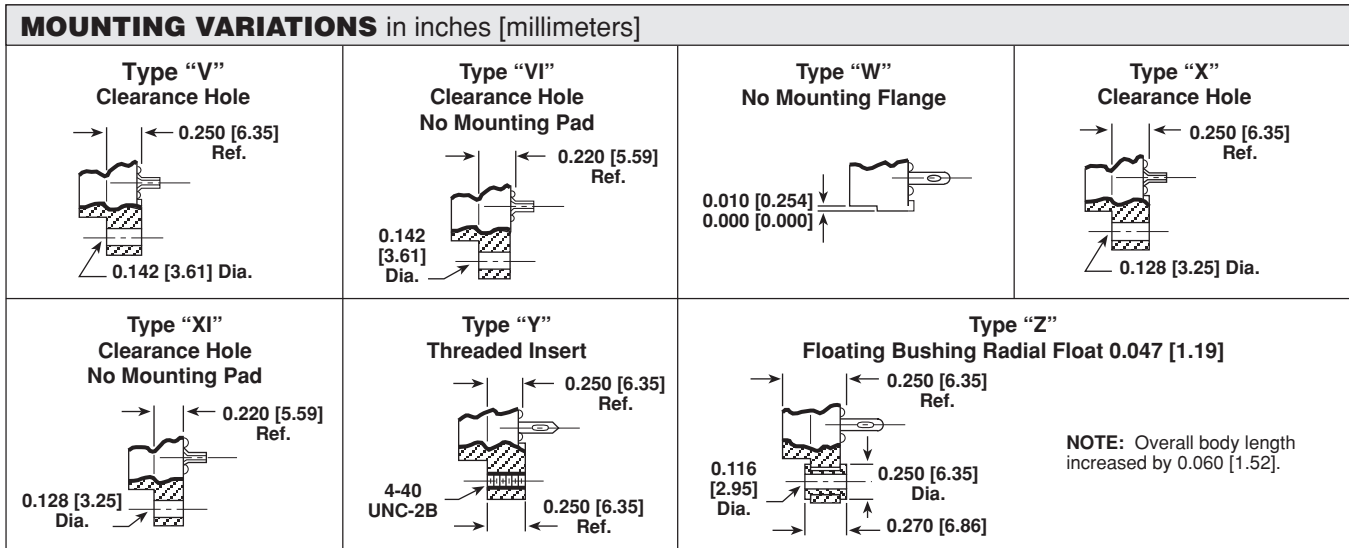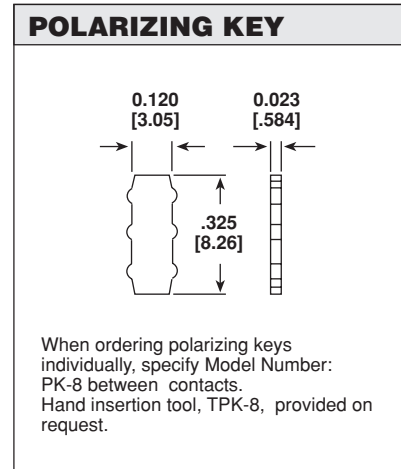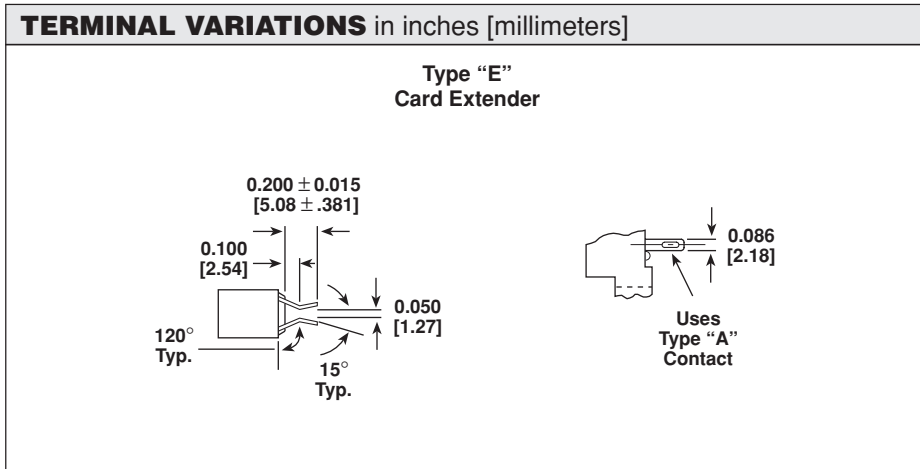




## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.