# Terminal markers
# DEK 5 FS 101-150

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

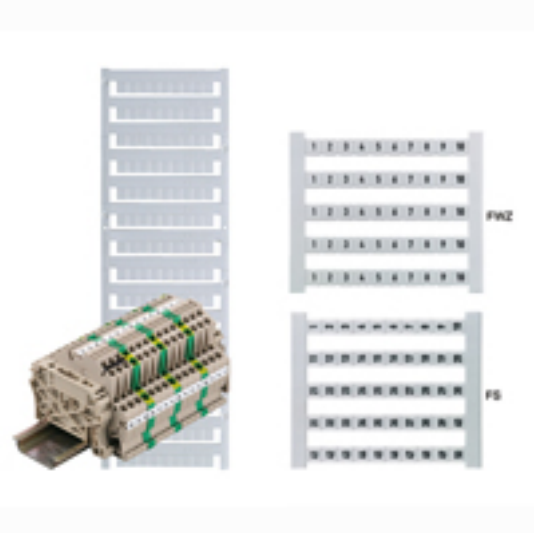


The dekafix (DEK) marker is the universal marker for all conductor and plug-in connectors as well as for electronic sub-assemblies. The system is ideal for short number sequences and covers a large range of ready-printed markers. Strips for fast installation in one work step. The printing is easy to read, rich in contrast, and is available in five widths.

- Large range of ready-to-use markers
- Strips for fast installation
- Connector markers, suitable for all Weidmüller cable connectors
- Available as blank cards, MultiCard or as cards with standard printing

## General ordering data

| | |
|---|---|
| Type | DEK 5 FS 101-150 |
| Order No. | 0473560101 |
| Version | Terminal markers, Card, 5 x 5 mm, Polyamide 66, Colour: White |
| GTIN (EAN) | 4008190009632 |
| Qty. | 500 pc(s). |

# Terminal markers
# DEK 5 FS 101-150

**Weidmüller Interface GmbH & Co. KG**
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

## Technical data

### Dimensions and weights

| | | | |
|---|---|---|---|
| Length | 5 mm | Width | 5 mm |
| Net weight | 0.04 g | | |

### Markings

| | | | |
|---|---|---|---|
| Cadmium | No | Colour | White |
| Colour of printing | Black | Conductor O.D. | |
| Halogen | No | Material | Polyamide 66 |
| Material colour according to resistance code | 9 | Operating temperature range, max. | 100 °C |
| Operating temperature range, min. | -40 °C | Orientation of print | vertical |
| Pin can be written (STI) | No | Pitch in mm (P) | 5 mm |
| Printed characters | Numbers | Printing method | MC Laser |
| Silicone | No | UL 94 flammability rating | V-2 |

### Classifications

| | | | |
|---|---|---|---|
| ETIM 3.0 | EC000761 | UNSPSC | 30-21-18-07 |
| eClass 5.1 | 27-14-11-37 | eClass 6.2 | 27-14-11-37 |
| eClass 7.1 | 27-14-11-37 | | |

### Approvals

| | |
|---|---|
| Approvals | ME25 |
| ROHS | Conform |