

RELAYS  
FIELD BUS CONNECTORS  
CIRCUIT BREAKERS  
OVERVOLTAGE PROTECTORS  
CABLE AND ELECTRONIC FUSES PRODUCTS  
DIN-RAIL MOUNTED TERMINAL BLOCKS  
TOOLS & MARKING SYSTEMS



PROTECTED CONNECTORS  
PCB CONNECTORS & TERMINAL BLOCKS  
SIGNAL CONDITIONERS  
POWER SUPPLIES  
WIRING SOLUTIONS

2004-2005

When good enough just isn't good enough

**Weidmüller** 



**TABLE OF CONTENTS**

**Wiring Solutions for Your Application ..... 3**

**Wiring Solutions that Maximize Space Utilization ..... 4**

**Wiring Solutions that Optimize Control System Performance ..... 6**

**Wiring Solutions that Streamline Control System Staging and Maintenance ..... 8**

**Wiring Solutions that Reduce Control System Installation Time ..... 10**

**Relays ..... 12**

**Signal Conditioners and Monitoring Modules ..... 14**

**Power Delivery Solutions ..... 16**

**Diode Modules ..... 17**

**Electronic Fuses ..... 17**

**Overvoltage Protection ..... 18**

**Cable Interface Products—Standard ..... 20**

**Cable Interface Products—PLC ..... 22**

**Cable Interface Products—Custom Solutions ..... 23**

**Cable Interface Products—Accessories ..... 24**

**Sensor-Actuator-Integrator (SAI) Series ..... 25**

**DIN-Rail Terminal Blocks—W-Series ..... 28**

**DIN-Rail Terminal Blocks—Z-Series ..... 31**

**DIN-Rail Terminal Blocks—I-Series ..... 34**

**DIN-Rail Accessories ..... 35**

**Protected Connectors—Heavy Duty ..... 36**

**PCB Terminal Blocks ..... 38**

**PCB Connectors ..... 43**

**Tools ..... 47**

**Marking Systems Products ..... 53**

**Marking Systems Products—Marking Equipment ..... 56**

**Marking Systems Products—Software and Services ..... 57**

**Index ..... 58**

# WIRING SOLUTIONS FOR YOUR APPLICATION

## Weidmuller Products

At Weidmuller, our goal is straightforward:  
to be your most knowledgeable, reliable,  
and responsive supplier of total wiring  
solutions from the sensor to the system.



### SIGNAL INTERFACE MODULES

- Signal Conditioners
- Power Supplies
- Overvoltage Protection
- Relays
- Circuit Breakers
- Electronic Fuses



### PROTECTED COMPONENTS

- Modular
- Metal or plastic housings
- Complete sets



### DIN-RAIL MOUNTED TERMINAL BLOCKS

- Screw clamp for 32 and 35 mm
- Tension clamp for 35 mm
- IDC clamp for 35 mm
- Circuit breakers for 35 mm



### ENCLOSURES

- Increased Safety Enclosures
- Standard Industrial Enclosures



### PRINTED CIRCUIT BOARD PRODUCTS

- PCB Terminal Blocks
- PCB Connectors



### HEAVY DUTY CONNECTORS

- Basic Connectors
- Through Panel Connectors
- Modular Connectors



### CABLE INTERFACE MODULES

- Standard Cable Interface
- PLC Cable Interface
- Programming Port
- DIN-Rail Outlet



### TOOLS/MARKING PRODUCTS

- Wire Preparation Tools
- Marking Tools/Systems

# WIRING SOLUTIONS FOR YOUR APPLICATION



## WIRING SOLUTIONS ARE A MATTER OF APPLICATION KNOWLEDGE

With over 60 years in the industry, Weidmuller offers unmatched depth in scores of customer applications spanning countries around the world. Not only has our close collaboration with customers inspired new products, it has given us the knowledge to guide you in selecting the wiring solution that most efficiently meets your needs.

## WIRING SOLUTIONS ARE A MATTER OF TECHNICAL EXPERTISE

Weidmuller has a well-deserved reputation for innovative design and high-quality materials along a broad range of interface products. We are committed to bringing new technology to the marketplace,

simplifying traditional tasks and creating new opportunities for our customers. Our commitment to excellence is the reason Weidmuller was the first U.S. supplier of terminal blocks and other interface products to earn ISO 9001 certification.

## WIRING SOLUTIONS ARE A MATTER OF BEING RESPONSIVE

At Weidmuller, we are dedicated to providing our customers with the most responsive service possible. Experienced applications engineers and sales representatives deployed around the country are ready to provide technical support. And thanks to our extensive distribution network, we can ensure that our customers receive the products they need when they need them.

## WIRING SOLUTIONS ARE A MATTER OF VALUE- ADDED SERVICE

At Weidmuller, we do more than provide our customers with the highest quality products at a competitive price. We design our operations with customers in mind. We provide an extensive array of selection guides as well as computerized and web-based tools that streamline ordering. At the same time, we maintain a large inventory of products. Our business enables you to concentrate on yours.



More products are available than shown.  
Please contact us or visit our website: [www.weidmuller.com](http://www.weidmuller.com).

# WIRING SOLUTIONS THAT MAXIMIZE SPACE UTILIZATION

Weidmuller's compact wiring solutions give you the option of extracting more functionality from your available space or significantly reducing the footprint of your application. When space is at a premium, Weidmuller can help you make the most of it.



ZDU 1.5



MCZ Series



WTR 2.5/4

## RAIL/PANEL PRODUCTS

### ■ ZDU 1.5

With an overall width of 3.5 mm (0.14 in), these terminal blocks are the smallest in the industry for TS 35 mounting rails, enabling high packing density. Save space when wiring switchgear cabinets in industrial, process and transportation applications.

### ■ MCZ Series

The MCZ Series offers digital and analog signal processing and pluggable cross-connections, enabling multiple tension clamp modules to be installed easily in a small area.

### ■ WTR 2.5/4

Used with a plug-in SIHA fuse holder, the WTR 4 can be quickly converted to a fuse terminal, saving space by providing two functions in a single terminal block.



Z-ROOF Blocks

■ **Z-ROOF Blocks**


Designed to meet today's requirements for higher mounting density and additional room at the connection level, Z-ROOF tension clamp terminal blocks are up to 36% shorter than standard tension clamp terminal blocks.



WDK 4N/WDK 2.5

■ **WDK 4N/WDK 2.5**

These two-tier terminal blocks allow users to build highly compact terminal points, 120 per 12 inches, on standard DIN-Rail, with feed-through connections on the top and bottom levels or a feed-through on top and a ground connection on bottom.



ZMAK

■ **ZMAK**

The smallest tension clamp motor terminal available, ZMAK enables six, 3-phase AC motors to be connected on a mounting rail of only 1.2 inches.



PLC Interface

■ **PLC Interface**

With our PLC interface, 16 points can be wired in a mere 3.5 inches of rail space, a savings of 20% over typical PLC connectors.



B2L/S2L 3.5 Connection System

**PRINTED CIRCUIT BOARD PRODUCTS**

■ **B2L/S2L 3.5 Double Density Connection System**


With two connection rows in one housing, the B2L/S2L tension clamp connection system requires up to 10% less PCB space and up to 30% less front panel space than 2.5/2.54 pitch connectors. No special tools required.



SLD

■ **SLD**

The double level pin headers conserve PCB space by allowing you to stack connections instead of spreading them out on the board.



BL I/O 3.5

■ **BL I/O 3.5**

This innovative plug combines the advantages of rail-mounted field device connection systems with the compactness of our BL 3.5/SL 3.5 connector system.



LM3R

■ **LM2NZF/LM3RZF and LM2N/LM3R**

For high packaging density on a PCB, these 5.08 double- and triple-level terminal blocks are ideal. Available with tension clamp or screw clamp termination.

# WIRING SOLUTIONS THAT OPTIMIZE CONTROL SYSTEM PERFORMANCE

Weidmuller offers wiring solutions that help you get the most out of your system, ensuring stable and reliable performance even under the most rigorous conditions.




WAVESERIES Signal Conditioners



Power Delivery Solutions



MICRO Series



Circuit Protection

## CONTROL PANEL PRODUCTS

### ■ WAVESERIES Signal Conditioners

This new generation of analog signal conditioners includes products with two- and three-way separation, as well as RTD and thermo conditioners.

### ■ Power Delivery Solutions

Overcurrent shutdown with automatic restart ensures stable and reliable system performance.

### ■ MICRO Series

With all the standard Weidmuller features, these single channel screw clamp or tension clamp relay and optocoupler products are the smallest available—at 6.1 mm (0.24 in) thick.

### ■ Circuit Protection


Surge protection degrades the harmful effect of electrical overvoltage and electrical noise which effects system performance and usage.



Locking Block Connectors



Strain Relief and Strain Relief Hoods



LED Indicators and LED Holders



PS 2.0 Test Plugs

## PRINTED CIRCUIT BOARD PRODUCTS

### ■ Locking Connectors

Ideal for high vibration applications or where added security is required, our locking blocks can fasten headers more securely to printed circuit boards and lock plugs to their corresponding headers.

### ■ Strain Relief and Strain Relief Hoods

These PCB accessories enable you to bundle wires together, while reducing stress when plugging and unplugging connectors.

### ■ LED Indicators and LED Holders

These curve-shaped LED indicators ensure easy viewing and more efficient monitoring of circuit conditions. LED holders can be attached to the back of either single-, double- or triple-level PCB terminal blocks.

### ■ PS 2.0 Test Plugs

A variety of our PCB terminal blocks have built-in test points that accommodate our PS 2.0 test plugs.



Disconnect Elements



Gold Contacts



Ferrules

### ■ Disconnect Elements

Easily adapted to single-, double- or triple-level PCB terminal blocks, these monitoring devices may be dovetailed together for up to a maximum of 24 poles.

## ACCESSORIES

### ■ Gold Contacts

We offer products with gold contacts for applications in rigorous conditions.

### ■ Ferrules

Wire-end ferrules guarantee long-term consistent quality of your electrical connection.



# WIRING SOLUTIONS THAT STREAMLINE CONTROL SYSTEM STAGING AND MAINTENANCE

Weidmuller's modular wiring solutions are designed to make staging and maintenance as effortless as possible.



20A ECOLINE Power Supply

## RAIL/PANEL PRODUCTS

### ■ NEW! ECOLINE Power Delivery Solutions


The latest addition to our ECOLINE family of switch-mode power supplies, these power supplies provide reliable, space-efficient solutions to drive higher-power demanding automation control panels.



WAVEcontrol Current-Monitoring Modules

### ■ WAVEcontrol Current-Monitoring Modules

WAVEcontrol modules identify differences and interruptions that occur in electrical circuits and help pinpoint specific measures to remedy these problems.



Universal PLC Interface

### ■ Universal PLC Interface

Only one part to order for all your PLC interface needs.



WTR 2.5/4, ZTL/ZTD, WTL 4&6

### ■ WTR 2.5/4, ZTL/ZTD, WTL 4 & 6

These innovative test terminals, with an accessible plug-in jumper channel, can only be found at Weidmuller. Used with a plug-in SIHA fuse holder, the WTR 4 quickly converts to a fuse terminal, providing two functions in one block.



SAI-M/SAI-F

### ■ SAI-M/SAI-F

Designed for passive system cabling, our Sensor-Actuator-Integrator (SAI) series uses finished cable assemblies and off-the-shelf M12 plug-in connectors, reducing installation and service costs.



Heavy Duty Connector Kits

### ■ Heavy Duty Connector Kits

These economical, prepackaged sets are under a single part number that includes hood, male and female insert and bulkhead housing.



Programming Ports

### ■ Programming Ports

Using industry standard rectangular connector housing, our programming ports allow power and data signals within control cabinets to be accessed from outside the cabinet.



AC Outlet Module with Ground Fault Interrupter

### ■ AC Outlet Module with Ground Fault Interrupter

For use in control cabinets as 120 VAC outlets for power tools, lights, test equipment, computers, etc.



WAVEPRO

■ **WAVEPRO**

Our WAVEPRO is the most flexible single-point signal conditioner family on the market today, offering configuration software that enables the user to change the signal conditioner ranges.



BL I/O 3.5

■ **BL I/O 3.5**

This pluggable field device connector is available with an integrated LED module, simplifying the system commissioning stage.



Insulated Screwdrivers

■ **Terminal Block Test Adapters and Insulated Screwdrivers**

Access signal indication and conduct maintenance checks without disturbing system operation.



WDU 2.5 to WDU 10

■ **WDU 2.5 to WDU 10**

Like many of our products, these terminal blocks have uniform profiles, reducing the number of accessories to order.



PS Test Plugs, Coding Keys, PCB Terminal Blocks with Test Points and Strain Relief Hoods

**ACCESSORIES**

■ **PS Test Plugs** make it possible to attach test equipment to monitor your system.

■ **Coding Keys** are used to prevent mismatching when mating plugs and headers.

■ **Test Points** are built into a selection of our single-level PCB terminal blocks.

■ **Strain Relief Hoods** reduce strain and channel and organize wires.

■ **Lock-Out Devices** lock plugs and headers together for added security.

**PRINTED CIRCUIT BOARD PRODUCTS**

■ **A Variety of Pluggable PCB Connectors**

We offer board-to-board, wire-to-board, wire-to-wire, rail-mount and through-panel PCB connectors — expanding your options when configuring your system.



PCB Connectors




BLIDC 3.5/BLIDC B 3.5

■ **BLIDC 3.5/BLIDC B 3.5**


The IDC plug has a removable contact that makes it easy to correct wiring mistakes.

# WIRING SOLUTIONS THAT REDUCE CONTROL SYSTEM INSTALLATION TIME

Weidmuller's wiring solutions reduce installation time in a dozen different ways, enabling you to complete your application in record time.



PLC Interface



I-Series Terminal Blocks



PLUGSERIES



ZQV 16/10, ZQV 35/10, ZQV 35/16

## RAIL/PANEL PRODUCTS

### ■ PLC Interface

For wiring in less than five seconds.

### ■ I-Series Terminal Blocks

Designed to reduce connection times by as much as 60%, making your wiring solutions faster, easier and more cost-effective.

### ■ PLUGSERIES

This family of pluggable relays features mounting and dismounting clamps that offer quick, reliable connection and disconnection for simple installation and maintenance.

### ■ ZQV 16/10, ZQV 35/10, ZQV 35/16

Each cross-connection has been designed to ensure that only the correct terminal combination can be plugged, eliminating errors.



Heavy Duty Connectors



Z-Series Terminal Blocks

### ■ Heavy Duty Connectors

These quick connect and disconnect products accelerate installation.

### ■ Z-Series Terminal Blocks

These terminal blocks are designed with tension clamp technology, requiring no special wire preparation, for a quick and easy termination.

## DESIGN AND SPECIFYING SUPPORT

### ■ RailDesigner 2.3

True-to-detail product display and easy-to-use graphic interface make this new and improved, mistake-proof software a real time saver when planning and ordering terminal rails.







# Relays

## Available in the following housing types:

### Terminal Block – for high rail density; standard terminal block

- 6...9.5 mm (0.24...0.37 in) thick
- Smallest single channel relay or optocoupler available
- Screw clamp or tension clamp
- Features positive wire termination, LED indication, low current and high voltage switching

### Enclosed – for applications that require more wiring space

- Fully enclosed package (EG Series)
- Features circuit diagram on top, LED power indicator and marked wire terminals
- Combi-foot for mounting on TS 32 or TS 35 DIN-Rail

### Enclosed Pluggable – WAVESERIES for applications that require high density and quick disconnection

- One to four channels per module
- Features circuit diagram on top lid, LED power indicators and marked wire terminals
- TS 35 DIN-Rail mountable
- Screw clamp or tension clamp

### Open Fixed – RS Series for applications that do not require fully enclosed module

- Combi-foot for mounting on TS 32 or TS 35 DIN-Rail
- Features LED power indication and marked wire terminals
- Non-removable relay or optocoupler for secure electrical connection

### Open Pluggable – RS Series is also available with sockets and pluggable relays and optocouplers

- Relay or optocoupler can be removed for field replacement

### Socket – for applications that require additional flexibility in product application

- Allows for the separate selection of relay or optocoupler from the DIN-Rail mounted socket

#### MAXIMUM CURRENT:

Relay	16 A
Opto	4 A

#### MAXIMUM VOLTAGE:

Relay	240 VAC/DC
Opto	240 VAC

Check complete catalog on our website for specific series, housing and application options.

## MCZ SERIES

- Small construction in 6 mm (0.24 in) housing
- Simple and quick wire connection via tension clamp technology
- Simple connection area layout
- Pluggable cross-connections so that multiple modules can be jumpered together to reduce wiring

Description	Part No.	Description	Part No.
MCZ O 24 VAC/DC 2A (Optocoupler)	8287730000	MCZ O 120 VAC/DC (Optocoupler)	8421060000
MCZ R 24 VDC (Relay)	8365980000	MCZ R 120 VAC (Relay)	8420880000
ZQV 4/2 (Jumper 2-pole)	1608950000	AP MCZ 1.5 (End Plate)	8389030000
ZQV 4/3 (Jumper 3-pole)	1608960000		




### MICRO SERIES

- Features pluggable relays
- Compact design — 6.1 mm (0.24 in)
- Pluggable cross-connections at inputs and outputs to minimize wiring
- Uses standard pluggable ZQV 4N jumpers
- Choice of screw clamp or tension clamp
- Innovative release lever for easy maintenance



Description	Part No.
MRS 24 VDC 1 CO (SPDT)	8533640000
MRZ 24 VDC 1 CO (SPDT)	8533660000
MRS 230 VAC 1 CO (SPDT)	8556020000
MRS 120 VAC/DC 1 CO (SPDT)	8556030000
MRZ 230 VAC 1 CO (SPDT)	8556090000
MRZ 120 VAC/DC 1 CO (SPDT)	8556100000
ZQV 4 N/2 SW (Jumper 2-pole black)	1793970000
ZQV 4 N/2 RT (Jumper 2-pole red)	1793950000

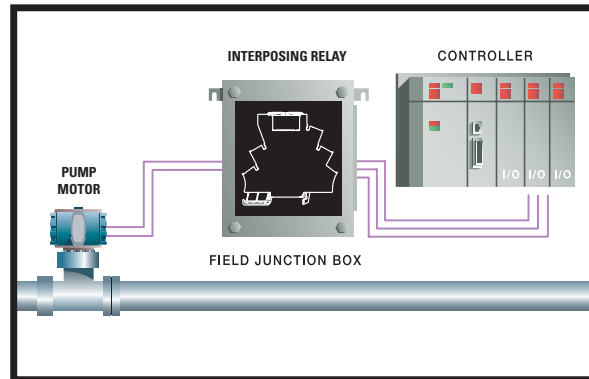


### APPLICATION

Analog Input: Conversion/Isolation

### PLUGSERIES RELAYS

- Designed to shorten maintenance and mounting times for industrial automation applications
- Easy plug-in standard relays
- Modular design to shorten installation time
- Choice of screw clamp or tension clamp
- Robust locking/release lever assures relay retention and speedy removal
- One or two changeover contacts (SPDT, DPDT)
- Jumpering capability for common coil connections or contacts between relay modules
- Plug-in free-wheeling diode with LED indicator included with complete modules



Description	Part No.	Description	Part No.
PRS 24 VDC LD 1 CO (SPDT)	8530621001	PRZ 120 VAC LD 2 CO (DPDT)	8530720000
PRS 24 VDC LD 2 CO (DPDT)	8530631001	PRS 230 VAC LD 1 CO (SPDT)	8530671001
PRZ 24 VDC LD 1 CO (SPDT)	8530691001	PRS 230 VAC LD 2 CO (DPDT)	8530681001
PRZ 24 VDC LD 2 CO (DPDT)	8530701001	PRZ 230 VAC LD 1 CO (SPDT)	8530731001
PRS 120 VAC LD 1 CO (SPDT)	8530641001	PRZ 230 VAC LD 2 CO (DPDT)	8530741001
PRS 120 VAC LD 2 CO (DPDT)	8530661001	ZQV 2.5 N/4-2 SW (Jumper 2-pole black)	1784270000
PRZ 120 VAC LD 1 CO (SPDT)	8530710000	ZQV 2.5 N/4-2 RT (Jumper 2-pole red)	1784280000



# Signal Conditioners and Monitoring Modules

## Available in the following housing types:

### Terminal Block – for high rail density; standard terminal block

- 6...12 mm (0.24...0.47 in) thick
- Smallest single channel analog modules available
- Screw clamp or tension clamp
- Features positive wire termination, LED indication, low current and high voltage switching, and different circuit isolation methods

### Enclosed Pluggable – WAVESERIES for applications that require high density and quick disconnection

- Features circuit diagram on top lid, LED power indicators and marked wire terminals

- TS 35 DIN-Rail mountable
- 12.5 mm (0.49 in) or 17.5 mm (0.69 in) wide
- Screw clamp or tension clamp

### Input Signal Types/Ranges

#### Current:

- 4...20 mA, standard
- 0...20 mA, standard
- up to 100 mA, bipolar

#### Voltage:

- 0...10 V
- -10...+10 V
- up to 200 VDC

#### Frequency:

- 0...10 kHz

#### RTD

- -200...+850°C

#### Thermocouple:

- -200...+1820°C

### Output Signal Types/Ranges

#### Current:

- 4...20 mA
- 0...20 mA
- any portion of 0...20 mA

#### Voltage:

- 0...10 V
- -10...+10 V
- any portion of  $\pm 10$  V

#### Frequency:

- 0...10 kHz
- 0...16 kHz

Check complete catalog on our website for specific series, housing and application options.

## MCZ SERIES

- Digital and analog signal conditioning in a terminal block housing
- Small construction in 6 mm (0.24 in) housing
- Simple and quick wire connection via tension clamp technology
- Simple connection area layout for reduced installation time
- Quick and easy replacement for service and maintenance
- Pluggable cross-connections so that multiple modules can be jumpered together to reduce wiring




Description	Part No.
MCZ SC 0.5...20 mA input threshold monitor	8227350000
MCZ SC 0...10 V input threshold monitor	8260280000
MCZ VFC 0...10 V input/ freq out	8461470000
MCZ VFC 4...20 mA input (loop powered)/freq out	8461490000
MCZ TO (Time Off Delay) 50 ms	8324590000
ZQV 4/2 (Jumper 2-pole)	1608950000
ZQV 4/3 (Jumper 3-pole)	1608960000
AP MCZ 1.5 (End Plate)	8389030000

## WAVESERIES

- Screw clamp or tension clamp via pluggable terminal connectors
- Replacement without tools
- Quick power-up with pluggable circuit board
- Minimum wiring with available cross-connections
- Jumpering of power and ground connections to adjacent modules available
- Small foot print of only 0.5...0.7" of rail space
- 3-port isolation



Description	Part No.
WTS4 THERMO SELECT	8432300000
WAS5 CCC LP, 0(4)...20 mA / 0(4)...20 mA	8444950000
WAS5 PRO RTD	8560700000
WAS5 PRO Thermo	8560720000
WAS4 PRO DC/DC	8560740000
WAS5 CVC HF, 4...20 mA / 0...10 V, 20 kHz	8447280000
WAS5 VCC HF, 0...10 V / 4...20 mA, 20 kHz	8447340000
WAS5 CCC, 0(4)...20 mA / 0(4)...20 mA, 3-port isolation	8540180000
WAS5 CVC 4...20 mA / 0...10 V, 3-port isolation	8540230000
WAS5 VCC 0...10 V / 4...20 mA, 3-port isolation	8540290000
WAZ5 CCC, 0...20 mA / 4...20 mA, 3-port isolation	8540260000
ZQV 2.5 N/2 (Jumper 2-pole black)	1718080000
ZQV 2.5 N/2 (Jumper 2-pole red)	1717900000

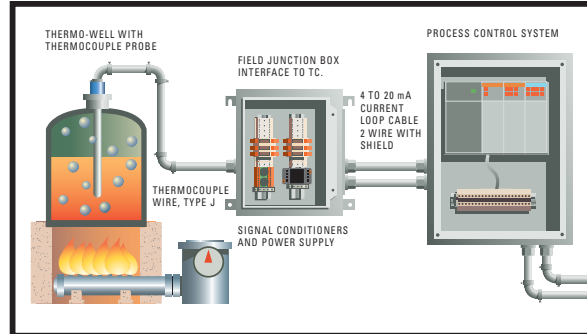

### APPLICATION

Signal Monitoring

## WAVECONTROL CURRENT MONITORING MODULES

- Screw clamp or tension clamp connections via pluggable terminals for maximum wiring flexibility
- Ability to use pluggable cross-connectors
- Pluggable printed circuit board
- TRMS (True Root Mean Square) transformer for current measurements of non-sinusoidal signals available
- Flashing LED for error indication
- Module replacement without use of tools
- Switching of measurement range without calibration
- Potential-free current measurements up to 60 A



Description	Part No.
WAS2 CMR 1/5/10 A AC, Relay Output	8516560000
WAS2 CMR 20/40/60 A AC, Relay Output	8513340000
WAS1 CMA 1/5/10 A AC, Analog Output	8523400000
WAS1 LP CMA 1/5/10 A AC, Analog Output, Loop Powered	8528650000
WAS2 CMA 5/10 A AC/DC, Analog Output	8526610000
WAS2 CMA 20/25/30 A AC/DC, Analog Output	8545830000
WAS2 CMA 40/50/50 A AC/DC, Analog Output	8513330000
ZQV 2.5 N/2 (Jumper 2-pole black)	1718080000
ZQV 2.5 N/2 (Jumper 2-pole red)	1717900000





# Power Delivery Solutions

## Our Power Delivery Solutions include:

- Power Supplies
- Diode Modules
- Electronic Fuses

## This full range of ECOLINE products features:

- Adjustable output voltage (24-28) V DC
- Front-panel LED status indicator
- Extensive burn-in tested product @ 100% load before shipment for all units
- Overload with electronic current limiting, over-voltage, and over-temperature protection
- Built-in Power Factor Correction (PFC) providing correction greater than 0.7
- Fully enclosed, rugged, and space-efficient metal casing
- Approvals include cULus 508 Listed, EN 60950, and CE Mark
- Complete power delivery solution with WaveGuard Electronic fuses and Diode modules

### SINGLE-PHASE INPUT

#### CP-SNT 500W

- Space-efficient design (125.2 x 227.5 x 100) mm, 2 Kg allows installation in smaller locations
- Delivers up to 20 Amps of regulated output current at 24 Volts DC

Description	Output	Current	Part No.
CP-SNT 500W	24 VDC	20 A	8778870000



### SINGLE-PHASE INPUT

#### CP-SNT 250W

- Requires only (125.5 x 125.2 x 100) mm of DIN-Rail space
- Delivers up to 10 Amps of regulated output current at 24 Volts D

Description	Output	Current	Part No.
CP-SNT 250W	24 VDC	10 A	8708680000



### SINGLE-PHASE INPUT

#### CP-SNT 120W

- Compact size (65.5 x 125.2 x 100) mm
- Delivers up to 5 Amps of regulated output current at 24 Volts DC

Description	Output	Current	Part No.
CP-SNT 120W	24 VDC	5 A	8708670000



### SINGLE-PHASE INPUT

#### CP-SNT 70W

- Compact size (55.5 x 125.2 x 100) mm for installation in smaller locations
- Delivers up to 3 Amps of regulated output current at 24 Volts DC

Description	Output	Current	Part No.
CP-SNT 70W	24 VDC	3 A	8708660000



**THREE-PHASE INPUT****CP-SNT3 1000W**

- Compact size (125.2 x 240 x 100) mm, 2.5 Kg for placement in smaller locations
- Delivers up to 40 Amps of regulated output current at 24 Volts DC

Description	Output	Current	Part No.
CP-SNT3 1000W	24 VDC	40 A	<b>8708730000</b>

**THREE-PHASE INPUT****CP-SNT3 500W**

- Requires only 52 mm (2.05 in) of DIN-Rail space and is only 62.5 mm (2.46 in) tall
- Compact packaging easily accommodates new installations and retrofits to existing control cabinets

Description	Output	Current	Part No.
CP-SNT3 500W	24 VDC	20 A	<b>88708710000</b>

**THREE-PHASE INPUT****CP-SNT3 250W**

- Compact size (125.2 x 125.2 x 100) mm, 1.5 Kg allows installation in smaller locations
- Delivers up to 10 Amps of regulated output current at 24 Volts DC

Description	Output	Current	Part No.
CP-SNT3 250W	24 VDC	10 A	<b>8708700000</b>

**DIODE MODULES**

- Requires only 55.5 mm (2.19 in) of DIN-Rail space
- Enables parallel connectivity of two or more power supplies

Description	Output	Current	Part No.
CP DM 10	24 VDC	10 A	<b>8710620000</b>
CP DM 20	24 VDC	20 A	<b>8768650000</b>

**WAVEGUARD ELECTRONIC FUSES**

- Requires only 22.5 mm (0.88 in) of DIN-Rail space
- Suitable for all direct current applications

Description	Output	Current	Part No.	Description	Output	Current	Part No.
WGS	24VDC	1.6A	<b>8618890000</b>	WGZ	24VDC	1.6A	<b>8621040000</b>
WGS	24VDC	3.15A	<b>8618910000</b>	WGZ	24VDC	3.15A	<b>8621030000</b>
WGS	24VDC	6.3A	<b>8618930000</b>	WGZ	24VDC	6.3A	<b>8621020000</b>
WGS	24VDC	8A	<b>8618940000</b>	WGZ	24VDC	8A	<b>8621010000</b>





# Overvoltage Protection

**Weidmuller has a complete line of overvoltage protection devices to effectively stop the harmful effects of electrical overvoltage and electrical noise.**

There is strong potential for any of the wiring running throughout your production facility to pick up voltage surges, overloads and spikes due to power distribution, such as the common event of turning motors on and off. These surges, if not contained, can damage sensi-

tive control equipment, sometimes enough to stop production, costing you valuable time and money.

Our surge protection solutions use single- or multi-stage high voltage traps to stop the overvoltage conditions before they reach your control system electronics.



We designed our overvoltage protection products with standard control voltages as our guide, creating them with the capacity to monitor analog and digital signals, multi- and single-wire control, data communication lines and power distribution signals.

## SURGE PROTECTION


### MCZ OVP SERIES

- Features tension clamp, reducing installation of wires
- Functions with gas discharge tube, Varistor and suppression diode
- Quick response time of 10 - 100 ps
- Use for 0...20 mA current loops
- Direct contact with rail, TS 35

Description	Output Voltage	Current	Part No.
MCZ OVP CL	24 VDC	0.5 A	<b>8448920000</b>
MCZ OVP SL	24 VDC	0.5 A	<b>8448940000</b>
MCZ OVP CL	24 VAC	1.25 A	<b>8448960000</b>
MCZ OVP SL	24 VAC	1.25 A	<b>8448970000</b>
MCZ OVP CL	48 VAC/DC	0.5 A	<b>8449000000</b>
MCZ OVP SL	48 VAC/DC	0.5 A	<b>8449030000</b>
MCZ OVP CL	48 VAC/DC	1.25 A	<b>8449040000</b>
MCZ OVP SL	48 VAC/DC	1.25 A	<b>8449050000</b>
MCZ OVP CL	115 VAC/DC	1.25 A	<b>8449060000</b>
MCZ OVP SL	115 VAC/DC	1.25 A	<b>8449070000</b>
MCZ OVP CL	230 VAC/DC	1.25 A	<b>8449080000</b>
MCZ OVP SL	230 VAC/DC	1.25 A	<b>8449090000</b>
MCZ OVP CL	24 VAC	0.5 A	<b>8472880000</b>
MCZ OVP discharge tube type 90 V			<b>8449130000</b>
MCZ OVP Varistor 30 V			<b>8449140000</b>
MCZ OVP TAZ unipolar 24 V			<b>8449150000</b>
MCZ OVP TAZ bipolar 24 V			<b>8449160000</b>
ZQV 4/2 (Jumper 2-pole)			<b>1608950000</b>
ZQV 4/3 (Jumper 3-pole)			<b>1608960000</b>
AP MCZ 1.5 (End Plate)			<b>8389030000</b>



Multi-Stage Surge Protection

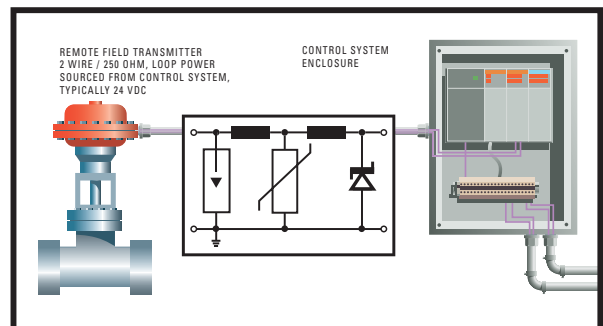

**APPLICATION:** Signal Circuit Overvoltage Protection

# Circuit Breakers

## CB 4200 SERIES

- Pushbutton style breaker
- UL-rated 1077 (supplementary protectors for use in electrical equipment)
- Available in single- and double-pole versions
- Direct contact with rail, TS 32 or TS 35
- Applicable current range: 0.10...16 A



## CB 2200 SERIES

- Lever style breaker
- UL-rated 1077 (supplementary protectors for use in electrical equipment)
- Available in single-, double- and three-pole versions
- Direct contact with rail, TS 32 or TS 35
- Applicable current range: 0.10...32 A




## CB 9100 SERIES

- Lever style breaker
- UL-rated 1077 (supplementary protectors for use in electrical equipment)
- Available in single-, double- and three-pole versions
- Direct contact with rail, TS 35
- Applicable current range: 0.5...63 A



## TRIP CURVES

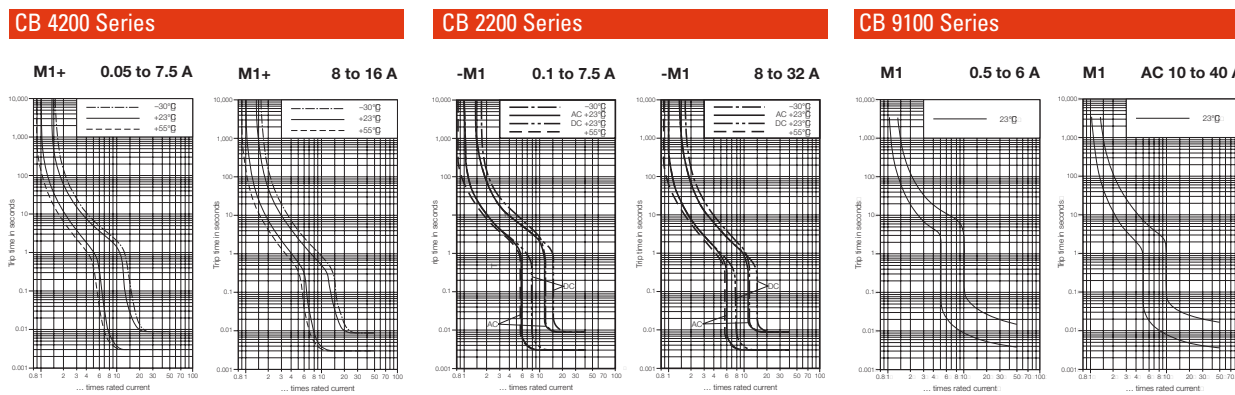



# Cable Interface Products

## STANDARD CABLE INTERFACE PRODUCTS

Weidmuller's multifaceted cable interface products are ideal for interfacing field wiring to high density cables. Designed for quick, simple and accurate plug-in installation, they:

- Accept most industry standard connector types
- Mount on industry standard DIN-Rails, providing an excellent complement to rail-mounted products such as programmable controllers
- Reduce the amount of DIN-Rail space normally required for field wiring termination
- Use double- and triple-level high-density terminals, saving space
- Require fewer wires to mark and dress
- Offer minimum installation error by connecting the field wiring to premarked printed circuit board terminal blocks that match the cable wiring

### D-SUBMINIATURE

- Mechanically polarized connector with a metal body and two rows of pins or sockets
- Assembled in standard UL recognized 70 mm (2.76 in) and high density 45 mm (1.77 in) width DIN-Rail housings
- Standard pin count: 9, 15, 25, 37 and 50



Description	Part No.	Description	Part No.
D-Sub (70 mm) UL recognized		D-Sub (45 mm)	
RD-9JS Male	<b>915935</b>	RD-9JS GRD Male	<b>8259010000</b>
RD-9JS Female	<b>915936</b>	RD-9JS GRD Female	<b>8216480000</b>
RD-15JS Male	<b>915941</b>	RD-15JS GRD Male	<b>8233350000</b>
RD-15JS Female	<b>915942</b>	RD-15JS GRD Female	<b>8209730000</b>
RD-25JS Male	<b>915949</b>	RD-25JS GRD Male	<b>8155650000</b>
RD-25JS Female	<b>915953</b>	RD-25JS GRD Female	<b>8155620000</b>
RD-37JS Male	<b>915956</b>	RD-37JS GRD Male	<b>8155660000</b>
RD-37JS Female	<b>915957</b>	RD-37JS GRD Female	<b>8155630000</b>
RD-50JS Male	<b>919656</b>	RD-50JS GRD Male	<b>8155670000</b>
RD-50JS Female	<b>919655</b>	RD-50JS GRD Female	<b>8155640000</b>

## ELCO

- High current rectangular plug connector with hermaphroditic contact design
- Connection mating and hold down accomplished with guide pins and one center mounted draw screw actuator
- Standard pin count: 20, 38 and 56, all UL recognized

Description	Part No.	Description	Part No.
RS-ELCO 38 M/L Male	<b>912126</b>	RS-ELCO 56 M/L Male	<b>912131</b>
RS-ELCO 38 M/L Female	<b>912128</b>	RS-ELCO 56 M/L Female	<b>912133</b>
RS-ELCO 38 M/R Male	<b>912127</b>	RS-ELCO 56 M/R Male	<b>912132</b>
RS-ELCO 38 M/R Female	<b>912129</b>	RS-ELCO 56 M/R Female	<b>912134</b>



## IDC RIBBON

- Designed with polarizing key for guiding and keying the socket connector
- Typical voltage and current: 125 VDC at 1 A
- Assembled in standard 70 mm and 45 mm width DIN-Rail housings
- Pin center dimension: 0.100 in
- Standard pin count: 10, 14, 16, 20, 26, 30, 34, 36, 40, 50, 60 and 64

Description	Part No.	Description	Part No.
IDC (70 mm) UL recognized		IDC (45 mm)	
RI-IDC 10	<b>915911</b>	RI-IDC 10	<b>8155610000</b>
RI-IDC 14	<b>915912</b>	RI-IDC 14	<b>8258980000</b>
RI-IDC 16	<b>915913</b>	RI-IDC 16	<b>8265540000</b>
RI-IDC 20	<b>915914</b>	RI-IDC 20	<b>8155600000</b>
RI-IDC 26	<b>915915</b>	RI-IDC 26	<b>8213470000</b>
RI-IDC 30	<b>915916</b>	RI-IDC 34	<b>8155590000</b>
RI-IDC 34	<b>915917</b>	RI-IDC 40	<b>8155580000</b>
RI-IDC 40	<b>915918</b>	RI-IDC 50	<b>8155570000</b>
RI-IDC 50	<b>915919</b>	RI-IDC 60	<b>8259000000</b>
RI-IDC 60	<b>915920</b>	RI-IDC 64	<b>8155550000</b>
RI-IDC 64	<b>915921</b>		





# Cable Interface Products


## PLC INTERFACE PRODUCTS

Weidmuller's flexible and efficient PLC Interface System, an alternative to traditional field wiring, is designed to decrease production costs by saving time and reducing wiring errors.

Easily connect Weidmuller's system to most major PLC module brands such as Allen-Bradley, GE Fanuc, Modicon, Siemens, Mitsubishi and Omron. Standard features include user-friendly premarked terminals and UL recognition.




Product	Description	Product	Description
Allen-Bradley	PLC-5	Siemens	95U
	SLC-500		100U
	ControlLogix		115U
	MicroLogix		135U
GE Fanuc	Series 90-30		57/300
	Series 90-70		57/400
	Versamax	Mitsubishi	A1 S/32
Modicon	Momentum PLC		FX2
	Quantum PLC	Omron	C200H
	Premium PLC		C500H
	Micro PLC		
	Nano PLC		
	Compact PLC		

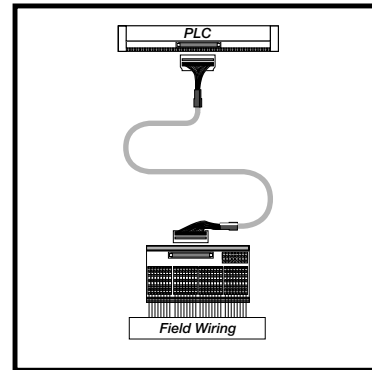

## NEW PRODUCT

### UNIVERSAL PLC INTERFACE

Weidmuller has designed the new Universal PLC Interface, an innovative one-part-number solution that reduces your inventory and investment costs. All the components—interface module, cable and wiring are universal and can be used to connect most any PLC and field module. Available in screw clamp or tension clamp termination.

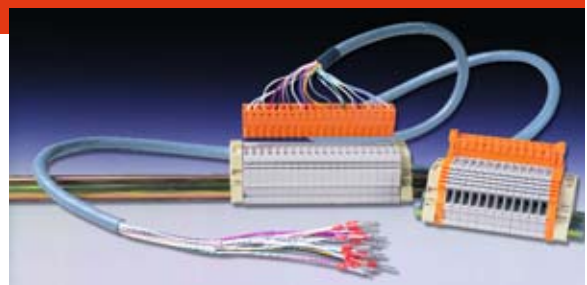

Description	Terminal Block	Part No.
QuickBloc PLC WDU-8 with Cable	Screw Terminals	<b>67601545</b>
QuickBloc PLC WDU-16 with Cable	Screw Terminals	<b>67601547</b>
QuickBloc PLC ZKS-8 with Cable	Tension Clamp	<b>67601549</b>
QuickBloc PLC ZKS-16 with Cable	Tension Clamp	<b>67601550</b>



# Cable Interface Products

## CUSTOM SOLUTIONS

**Weidmuller offers custom design, engineering and assembly services—solutions that ensure you have the right product at the right time for your application.**

Partnering with our expert knowledge and experience allows your engineers to concentrate their time, energy and resources on maintaining your application goals.

Partner with Weidmuller for custom products when:

- Reduction of panel space requires condensed functionality
- Standard products do not meet your unique application need
- You need an expert designer to offer innovative solutions
- You need a truly inventive product to place you ahead of the competition
- Market pressures dictate a rapid turnaround on a custom product design

### WEIDMULLER OFFERS...

#### unmatched expertise and products

- Over 60 years of unparalleled innovative product design and manufacturing knowledge and experience
- Universal understanding of applications and approvals enabling us to develop solutions for customers worldwide
- Experienced design team to pinpoint your exact specifications
- Expert and accessible technical support team
- The ability to flexibly accommodate specialty components from other manufacturers, if required by your application
- Quality assurance of our products, as an ISO 9001 inspection point

Our design and engineering services include:

- Controller front panel adapters
- DIN-Rail terminal blocks
- Controller interface products

Our custom assembly services include:

- Pre-assembled DIN-Rail modules
- Population of the backplane for enclosures
- Custom marking—plotter printing, wire and cable marking and equipment marking
- Kitting of parts you use routinely







# Cable Interface Products

## ACCESSORIES

### DIN-RAIL MOUNTED MAINTENANCE OUTLETS

- Utilized in cabinets as 120 VAC outlets for electrical equipment such as power tools, lights, test apparatus and computers
- Designed to make routine maintenance and system upgrades faster and simpler

Two versions are available:

- A single outlet with feed-through terminals for the AC power (the 120 V enters the module, powers the outlet and is available on a separate group of terminals for powering other devices)
- A duplex version

#### FEATURES:

- TS 32 and TS 35 DIN-Rail mounted
- Power outlet 15 A
- UL and CSA approved



Description	Part No.	Description	Part No.
RS Simplex 120 V Single Outlet	<b>9915480000</b>	RS Duplex 120 V Dual Outlet	<b>9915490000</b>

### NEW! AC OUTLET MODULES WITH GROUND FAULT INTERRUPTER

- For use within cabinets as 120 VAC outlets for power tools, lights, test equipment, computers, etc.
- Duplex GFI, 15A or 20A available
- Mount on 35mm DIN rail or can be direct mounted using an optional mounting kit
- CSA and UL approved



Description	Part No.
AC Outlet Module w/ GFI	<b>7940000036</b>



# SAI Products

## SENSOR-ACTUATOR-INTEGRATOR (SAI) SERIES

- Industrial automation products (junction boxes) designed to be installed directly into your machine application
- Choice of metal or plastic housing—protects from high heat, corrosion, dust and water submersion
- Complete sets—pluggable cable hood or fixed cable—with no extra parts to buy or stock
- Product line contains LED status indication
- Totally sealed with epoxy-encapsulated environmental protection—IP 67/68 (NEMA 6/6P)
- Available in 4, 6 or 8 ports and 3, 4 or 5 pin M12 or Harax® connectors
- Designed with M12, M8 and EMC-compliant screw connections
- Eliminates time and cost intensive installations
- Saves on material costs and space



## SAI-MMS

- Metal housing provides continuous shielding of connections from sensors to control side
- The only fully shielded junction box on the market with M12 EMC-compliant screw connections and 4- and 5-pin configurations
- Pluggable hood with EMC-compliant cable glands for pre-assembling homerun cable
- Designed for use in high heat and harsh environments
- UL and CSA approval



Poles	Description	Part No.	Poles	Description	Part No.
4	SAI-4 MMS 4P M12	<b>1783540000</b>	5	SAI-4 MMS 5P M12	<b>1783520000</b>
4	SAI-8 MMS 4P M12	<b>1783530000</b>	5	SAI-8 MMS 5P M12	<b>1783510000</b>

## SAI-MHD

- Plastic base and metal hood
- For standard trunk cables and choice of homerun cable entry
- Allows for utilization of larger diameter cables
- For cables with outside insulation diameter from 13 mm (0.51 in)...18 mm (0.71 in)
- Accommodates 90° or 180° homerun cable connection
- UL and CSA approval



Poles	Description	Part No.	Poles	Description	Part No.
4	SAI-4 MHD 4P M12	<b>1705923000</b>	5	SAI-4 MHD 5P M12	<b>1701233000</b>
4	SAI-8 MHD 4P M12	<b>1705943000</b>	5	SAI-8 MHD 5P M12	<b>1701253000</b>

## SAI-M MICRO CONNECTOR

- Pluggable disconnect module, providing high application flexibility
- M12 micro connectors
- Reconfigurable micro cordsets minimize installation time and wiring errors
- Choice of pluggable potential isolation with simple jumper change
- 4-pole version with 1 signal per port
- 5-pole version with 2 signals per port
- Standard plug-in and pin layout
- Protection class: IP 68 (NEMA 6P)
- UL and CSA approval



Poles	Description	Part No.	Poles	Description	Part No.
4	SAI-4-M 4P M12	<b>1705920000</b>	3	SAI-4-M 3P IDC	<b>1760040000</b>
4	SAI-8-M 4P M12	<b>1705940000</b>	3	SAI-8-M 3P IDC	<b>1760060000</b>
5	SAI-4-M 5P M12	<b>1701230000</b>	4	SAI-4-M 4P IDC	<b>1766780000</b>
5	SAI-8-M 5P M12	<b>1701250000</b>	4	SAI-8-M 4P IDC	<b>1766800000</b>

## SAI-F MICRO CONNECTOR

- Pre-wired (fixed) homerun cable minimizes inventory expense and connection errors
- C-Track compatible polyurethane homerun cable
- Homerun cables available in 5, 10, 15 and 20 meter lengths
- M12 micro connectors
- Micro cordsets minimize installation time and wiring errors
- 4-pole version with 1 signal per port
- 5-pole version with 2 signals per port
- Standard plug-in and pin layout
- Protection class: IP 68 (NEMA 6P)
- UL and CSA approval



Poles	Description	Part No.	Poles	Description	Part No.
4	SAI-4-F 4P PUR 5M	<b>9456190000</b>	5	SAI-4-F 5P PUR 5M	<b>9456330000</b>
4	SAI-4-F 4P PUR 20M	<b>9456230000</b>	5	SAI-4-F 5P PUR 20M	<b>9456370000</b>
4	SAI-8-F 4P PUR 5M	<b>9456750000</b>	5	SAI-8-F 5P PUR 5M	<b>9456890000</b>
4	SAI-8-F 4P PUR 20M	<b>9456790000</b>	5	SAI-8-F 5P PUR 20M	<b>9456930000</b>

## SAI SERIES ACCESSORIES

Weidmuller offers a wide range of accessories:

- M12 micro extension cordsets 0.3 m...10.0 m
- M12 micro dust cap/marking
- Field attachable connectors
- Custom homerun cables available on request



## PROGRAMMING PORT

- Heavy duty connector system for power and data
- Allows inside of control cabinets to be accessed from the outside without powering down
- Designed with industry standard rectangular connector housings made from die-cast aluminum
- Protection class: IP 65



Description	Part No.	Description	Part No.
PROPORT AC PLUG +9 PIN DSUB	<b>9909020000</b>	PROPORT 9-PIN DSUB AC	<b>9910560000</b>
PROPORT AC PLUG +15 PIN DSUB	<b>9909030000</b>	PROPORT AC +9PIN DSUB	<b>9910670000</b>
PROPORT AC PLUG +25 PIN DSUB	<b>9909040000</b>	PROPORT 1 X RJ45	<b>9916030000</b>
PROPORT 8-PIN RJ45 AC	<b>9910550000</b>	PROPORT AC +5A CIRCUIT BREAK	<b>9916200000</b>



# DIN-Rail Terminal Blocks

## W-SERIES

- Screw clamp termination
- Requires no special wire preparation
- High contact force and self-locking clamp
- Wire size range from 26 AWG...250 MCM
- Current load range from 10...225 A
- Voltage range from 300...600 V
- Standard blocks made of beige Wemid
- Available options include a range of colors and material, blown fuse indication (LED) and diodes



## SINGLE-LEVEL FEED THROUGH

Description	Part No.	Description	Part No.
WDU 2.5N	1040800000	WDU 6	1020200000
WDU 2.5	1020000000	WDU 10	1020300000
WDU 4	1020100000	WDU 16	1020400000

## DUAL-LEVEL FEED THROUGH

WDK 2.5 N	1041600000	WDK 4 N	1041900000
-----------	------------	---------	------------

## BRANCH

WDK 2.5 V	1022300000	WDK 2.5 LD with LED (6 VDC)	9119970000
WDK 4 NV	1041910000	WDK 2.5 D with Diode	8025610000

## DISCONNECTS

WTR 2.5	1011100000	WTR 2.5 with stb	1011200000
---------	------------	------------------	------------

## FUSE

Single-level WSI 6	1011000000	Single-level WSI 6/2 24 VDC/60 VAC	1014200000
Single-level WSI 6 24 VDC/60 VAC	1012200000	Single-level WSI 6/2 48 VDC/120 VAC	1014300000
Single-level WSI 6 48 VDC/120 VAC	1012300000	Fuse/Feed Through KDKS 1/35	9503310000
Single-level WSI 6/2	1014000000		

## GROUND

WPE 2.5	1010000000	WPE 6	1010200000
WDK 2.5 PE	1036300000	WPE 10	1010300000
WPE 4	1010100000		



Single-level Feed Through



Disconnects



Dual-level Feed Through



Fuse



Branch



Ground

## MICRO SERIES — TS 15 DIN-RAIL MOUNTABLE

- 87 points per foot of rail
- Pluggable ZQV jumpers
- 300 V, 15 A, 26...14 AWG

Description	Part No.	Description	Part No.
WDU 1.5/R3.5/15	1753280000	WDK 1.5/R3.5/15	1753290000




## WDU 2.5 COLOR TERMINAL BLOCKS

Weidmuller offers color terminal blocks for quick identification

	WDU 2.5 N screw jumpers	WDU 2.5 N ZQV pluggable jumpers	WDU 2.5 plug or screw jumpers	WDU2.5N 600 V UL
Beige Wemid	<b>1023700000</b>	<b>1040800000*</b>	<b>1020000000</b>	<b>1730940000</b>
Blue Wemid	<b>1023748000</b>		<b>1020080000</b>	
Orange Wemid	<b>1023760000</b>		<b>1020060000</b>	
Red PA			<b>1020040000</b>	
Yellow Wemid			<b>1020020000</b>	
Green Wemid			<b>1020090000</b>	
Violet PA			<b>1037700000</b>	
Brown Wemid			<b>1037710000</b>	
Gray Wemid			<b>1037720000</b>	
White Wemid			<b>1036800000</b>	
Black Wemid			<b>1020010000</b>	
Beige Wemid (ATEX)	<b>1752140000</b>		<b>1752170000</b>	
Blue Wemid (ATEX)	<b>1752150000</b>		<b>1752180000</b>	

\*Pluggable jumpers must be ordered separately.



## WDU 2.5/TC

- Use in temperature measuring circuits
- Same insulation materials as standard terminal blocks
- Special thermocouple markings according to ANSI standards

Description	Type	Technical Data		Part No.
		Busbar	ID#*	
WDU 2.5/TC	K		● Chromel 1	<b>1024100000</b>
			● Alumel 2	
WDU 2.5/TC	T		● Copper 5	<b>1024200000</b>
			● Constantan 4	
WDU 2.5/TC	J		● Iron 3	<b>1024300000</b>
			● Constantan 4	
WDU 2.5/TC	S		● E-copper 5	<b>1024400000</b>
			● A-copper 6	
WDU 2.5/TC	B		● S-copper 7	<b>1033700000</b>
			● E-copper 5	
WDU 2.5/TC	E		● Chromel 1	<b>1033300000</b>
			● Constantan 4	



\*ID# is stamped into current bar.



## SLIDE-LINK DISCONNECTS

- Superior solution for simple current transformer circuits and measurement transformer test sets
- WTL 4 provides a lateral slide link disconnect with additional short circuit capability
- WTL 6/2 and 6/3 include short circuit jumper
- Connections for test equipment are integral parts of housing

Type	Description	Part No.
WTL 4	Test disconnect terminal without StB socket	<b>1754970000</b>
WTL 4	Test disconnect terminal with StB socket	<b>1754960000</b>
WTL 6/1	Lateral disconnect with StB socket	<b>1016900000</b>
WTL 6/1	Lateral disconnect without StB socket	<b>1016700000</b>
WTL 6/2	Test plugs accept open type male leads	<b>1017700000</b>
WTL 6/3	Test plugs accept sheathed male leads	<b>1018600000</b>



More products are available than shown.  
Please contact us or visit our website: [www.weidmuller.com](http://www.weidmuller.com).

### DUAL-LEVEL/BRANCH TERMINALS

- Double-level feed through
- Compact design
- Pluggable jumpers
- Rated at 600 V, 27 A, 22...10 AWG

Description	Part No.	Description	Part No.
WDK 2.5N	104160000	WDK 4N	104190000
WDK 2.5NV	104161000	WDK 4NV	104191000



### DISCONNECT/FUSE TERMINALS

- Features built-in cross-connection
- Quickly converts to fuse terminal using SIHA fuse holder
- Rated at 600 V, 16 A, 22...10 AWG

Description	Part No.	Description	Part No.
WTR 2.5	101110000	WTR 4	791018000
WTR 2.5/SI	176394000	WTR 4/SI	791024000

LED version also available. Call Weidmuller for details.




### PRODUCT UPGRADES

#### MULTI-TIER TERMINALS

The following products are now made of Wemid molding material. Wemid withstands a continuous operating temperature of 248°F and has earned the highest possible flammability rating in its class: UL 94 V-0 (non-burning).

Type	Description	Part No.
DLD, DLI	Multiple-level sensor terminal blocks	1783790000/1783820000
MAK 2.5	Triple-level terminal block with ground	7917030000
KDKS 1	Fuse with feed-through terminal block	9532440000

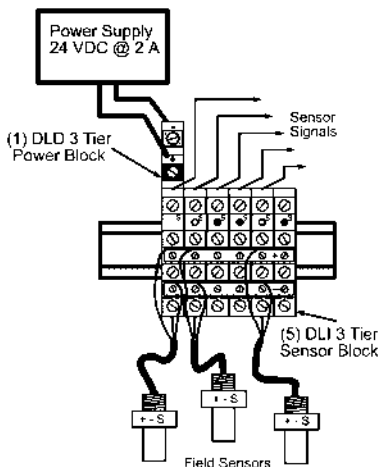

Example: Three Sensor Hook-up Diagram



# DIN-Rail Terminal Blocks

## Z-SERIES

- Tension clamp termination
- Requires no special wire preparation
- High contact force and proven clamping yoke system
- Wire size range from 26...2 AWG
- Current load range from 10...115 A
- Voltage range from 300...600 V
- Standard blocks made of beige Wemid
- Available options include a range of colors and material, blown fuse indication (LED) and diodes



### SINGLE-LEVEL FEED THROUGH

Description	Part No.	Description	Part No.
ZDU 2.5	1608510000	ZDU 6	1608620000
ZDU 4	1632050000	ZDU 10	1746750000

### MULTI-LEVEL FEED THROUGH

ZDK 2.5	1674300000	ZMAK	1768000000
---------	------------	------	------------

### BRANCH

ZDK 2.5/1.5V	1689990000		
--------------	------------	--	--

### DISCONNECT

ZTR 2.5	1608680000	ZDTR 2.5	1745400000
---------	------------	----------	------------

### SINGLE-LEVEL FUSE

ZSI 2.5	1616400000	ZSI 2.5/2	1616460000
ZSI 2.5/LD 60 VAC	1616430000		

### GROUND

ZPE 2.5	1608640000	ZPE 4	1632080000
ZPE 2.5/3AN	7904180000	ZPE 6	1608670000



Single-Level Feed Through



Disconnect



Multi-Level Feed Through




Single-Level Fuse



Branch



Ground




Branch



### FEED THROUGH TERMINAL BLOCKS


- Slimmest terminal block available
- Only 3.5 mm wide – takes up 42% less space on TS 35 DIN-Rail
- 86 Termination points per foot of rail
- 2 jumpering channels per terminal
- Rated for: 300 V, 10 A, 28...16 AWG

Description	Part No.	Description	Part No.
ZDU 1.5	<b>1775480000</b>	ZDU 1.5/4AN	<b>1775580000</b>
ZDU 1.5/3AN	<b>1775530000</b>		



### DISCONNECT TERMINAL BLOCKS

- Pluggable jumpers with locking clip for quick circuit manipulation
- Ideal for current transformer circuits
- Produce optional test applications with a variety of termination methods
- Rated for 600 V, 33 A, 20...8 AWG



Description	Part No.	Description	Part No.
ZTL 6/STB	<b>1771800000</b>	ZTD 6	<b>1771810000</b>



### Z-ROOF FEED THROUGH TERMINAL BLOCKS

- Reduce space (width) requirements by 30%
- Pluggable Jumpers Acceptable
- Rated for 600 V, 20...65 A, 26...4 AWG

Description	Part No.	Description	Part No.
ZDU 2.5-2	<b>1772060000</b>	ZPE 2.5-2	<b>1706090000</b>
ZDU 4-2	<b>1770370000</b>	ZPE 4-2	<b>1770380000</b>



### PLUGGABLE TERMINALS



- Provides a pluggable header or connector for quick disconnects, testing or maintenance
- Allows for greater density with branch, dual, triple, or four level configurations
- Modular construction; plug-in connectors for 2-12 poles
- Base terminal and plug-in connector equipped with 2 connections and 2 cross-connection channels for greater wiring flexibility

Description	Part No.	Description	Part No.
ZKBD 2.5/1.5	<b>1688260000</b>	ZDKB	<b>1699600000</b>
ZKSD 2.5/1.5	<b>1697610000</b>	ZRV 1.5	<b>1698160000</b>
ZDKS	<b>1699610000</b>	ZKB 1.5	<b>1742620000</b>



### SENSOR TERMINAL BLOCKS

- Terminal block with pluggable mini-terminal
- Used to distribute power or provide a ground connection
- Quickly connect 3- or 4-wire sensors and actuator devices
- Base provides a feed-through connection for control signals
- Pluggable terminals have built-in bussing system for reduced installation time



Description	Part No.	Description	Part No.
ZIA 1.5/3L-1S 3-wire sensor	1651980000	ZIA 1.5/4L-PE 4-wire sensor w/ ground	1652030000
ZIA 1.5/4L-1S 4-wire sensor	1652010000	ZVL 1.5/20 mini-terminal, Brown	1650370000
ZIA 1.5/3L-PE 3-wire sensor w/ ground	1652000000	ZVL 1.5/20 mini-terminal, Blue	1650360000

### ZDU COLOR TERMINAL BLOCKS

Weidmuller offers color terminal blocks for quick identification

	ZDU 2.5 Single	ZDU 2.5/3AN Branch	ZDU 2.5/4AN Branch	ZDU 2.5/2x2AN Single/Dual	ZDU 2.5/2x2AN/D Single/Dual w/Diode	ZDU 2.5/2x2AN/LD Single/Dual w/LED
Beige Wemid +	1608510000	1608540000	1608570000	1608600000	1650340000	1692590000
Beige Wemid -					1650350000	1692600000
Blue Wemid	1608520000	1608550000	1608580000	1608610000		
Orange Wemid	1636780000	1636790000	1636800000	1636810000		
Red PA	1683260000	1683340000	1683420000			
Yellow Wemid	1683270000	1683350000	1683430000			
Green Wemid	1683280000	1683360000	1683440000	1683520000		
Violet PA	1683290000	1683370000	1683450000			
Brown Wemid	1683300000	1683380000	1683460000	1683540000		
Gray Wemid	1683310000	1683390000	1683470000	1683550000		
White Wemid	1683320000	1683400000	1683480000			
Black Wemid	1683330000	1683410000	1683490000			
10 Pole	1626950000	1626960000	1626970000			
Beige Wemid (ATEX)	1739370000	1739390000	1739410000	1739430000		
Blue Wemid (ATEX)	1739380000	1739400000	1739420000	1739440000		

\*Pluggable jumpers must be ordered separately.



### DIRECT MOUNT TERMINAL BLOCKS

- Tension clamp feed-through terminals
- Compact size designed for limited-space control panel applications
- Durable material for harsh environment
- Available as individual blocks or pre-assembled units of 2-12 poles

Description	Part No.	Description	Part No.
ZDUB 2.5-2/2AN/DM	1704350000	ZDUB 2.5-2/2AN/DB with mount tab	1704500000



### MICRO SERIES — TS 15 DIN-RAIL MOUNTABLE

- 60 points per foot of rail
- 300 V, 20 A, 26...12 AWG
- Pluggable ZQV jumpers

Description	Part No.
ZDUA 2.5-2/15	1720920000





# DIN-Rail Terminal Blocks


## I-SERIES

- Insulation displacement connection (IDC) termination
- Gas-tight and vibration proof (spring-powered insulation displacement clamp, only one of its kind)
- Eliminates the need for wire stripping
- Reduces conductor connection times as much as 60% compared to conventional screw termination
- Low contact resistance due to copper busbar with tin-lead plating
- Rated for: 300 V, 10 A, 24...14 AWG
- Standard blocks made of beige Wemid

### HOW TO: Termination Steps



Insert conductor into wire guide (1).



Insert screwdriver and depress wire guide by tilting screwdriver outwards (2).



Remove screwdriver, the conductor is secure (3).

### FEED THROUGH

Description	Part No.
IDU 1.5 N	<b>1792540000</b>
IDU 2.5 N	<b>1812900000</b>

### NEW! FEED THROUGH HYBRIDS

Description	Part No.
IDU 1.5N/ZB Screw/IDC	<b>1792730000</b>
IDU 1.5N/ZF Tension/IDC	<b>1792700000</b>
IDC 2.5N/ZB Screw/IDC	<b>1821290000</b>



Feed Through



Disconnect

### DISCONNECT

Description	Part No.
ITR 1.5 N	<b>1792630000</b>
ITR 2.5 N	<b>1812990000</b>



Disconnect and Fuse



Ground

### DISCONNECT AND FUSE

Description	Part No.
ISI 1.5	<b>1792640000</b>
ISI 2.5 N	<b>1813010000</b>

### GROUND

Description	Part No.
IPE 1.5 N	<b>1792560000</b>
IPE 2.5 N	<b>1812920000</b>



Branch



Branch Hybrid

### NEW! BRANCH

Description	Part No.
IDU 1.5N/3AN	<b>1792570000</b>
IDU 1.5N/4AN	<b>1792600000</b>

### NEW! BRANCH HYBRIDS

Description	Part No.
IDU 2.5N/3AN/ZB	<b>1812930000</b>
IDU 2.5N/4AN/ZB	<b>1812960000</b>




# DIN-Rail Accessories

## DIN-RAIL

- Available in steel, aluminum or copper
- Steel versions are electroplated and passivated with yellow di-chromate coating
- Available in solid or slotted versions (1 or 2 meter lengths)

Description	Part No.	Description	Part No.
TS 35 x 7.5 Slotted Steel 2 m	<b>51450</b>	TS 32 x 15 Solid Steel 2 m	<b>12280</b>
TS 35 x 7.5 Solid Steel 2 m	<b>38340</b>	TS 32 x 15 Slotted Steel 2 m	<b>51440</b>
TS 35 x 15 Solid Steel 2 m	<b>23640</b>	TS 35 x 7.5 Aluminum hi Rail 1 m	<b>999716</b>
TS 35 x 15 Slotted Steel 2 m	<b>23650</b>	TS 35 x 7.5 Aluminum hi Rail* 2 m	<b>999789</b>



## END PLATES

- Encloses open side of modular terminals

Description	Part No.	Description	Part No.
WAP/WDU 2.5 - 10	<b>1050000000</b>	ZAP/ZDU 4	<b>1632090000</b>
ZAP/ZDU 2.5	<b>1608740000</b>	ZAP/ZDU 6	<b>1608830000</b>




## END BRACKETS

- Prevents incorrect placement and ensures secure terminal positioning
- Designed to accept marking tags — can serve as group markings

Description	Part No.	Description	Part No.
WEW 35/2 for TS 35	<b>1061200000</b>	EWK 1/32 for TS 32	<b>206160000</b>
EW 35 for TS 35	<b>383560000</b>	ZEW 35 for TS 35	<b>954000000</b>

### NEW! TENSION END BRACKET

ZEW 15 for TS 15	<b>7920340000</b>
------------------	-------------------




## JUMPERS

- 100% insulated

### WDU SERIES (SCREW)

Description	Part No.	Description	Part No.
WQV 2.5/2	<b>1053660000</b>	WQV 4/2	<b>1051960000</b>
WQV 2.5/3	<b>1053760000</b>	WQV 4/3	<b>1054560000</b>
WQV 2.5/10	<b>1054460000</b>	WQV 4/10	<b>1052060000</b>



## PLUGGABLE

- No tools required for installation


### ZDU SERIES (PLUGGABLE)

Description	Part No.	Description	Part No.
ZQV 2.5/2	<b>1608860000</b>	ZQV 4/2	<b>1608950000</b>
ZQV 2.5/3	<b>1608870000</b>	ZQV 4/3	<b>1608960000</b>
ZQV 2.5/4	<b>1608880000</b>	ZQV 4/4	<b>1608970000</b>
ZQV 2.5/10	<b>1608940000</b>	ZQV 4/10	<b>1609030000</b>

- Reduce installation time by 60%

### WDU SERIES (PLUGGABLE)

Description	Part No.	Description	Part No.
ZQV 2.5N/2	<b>1693800000</b>	ZQV 4N/2	<b>1758250000</b>
ZQV 2.5N/3	<b>1693810000</b>	ZQV 4N/3	<b>1762630000</b>
ZQV 2.5N/4	<b>1693820000</b>	ZQV 4N/4	<b>1762620000</b>
ZQV 2.5N/10	<b>1693880000</b>	ZQV 4N/10	<b>1758260000</b>



### NEW! STEP-DOWN JUMPERS

Description	Part No.
ZQV 35/16	<b>7920120000</b>
ZQV 35/10	<b>7920100000</b>
ZQV 16/10	<b>7920080000</b>

More products are available than shown.  
Please contact us or visit our website: [www.weidmuller.com](http://www.weidmuller.com).



## Protected Connectors



### HEAVY DUTY CONNECTORS

Weidmuller offers compact, quick-disconnect heavy-duty industrial connectors.

- DIN standard connectors for reliability and global acceptance
- Protecting numerous applications to IP 65 (NEMA 4P) in power plants, chemical plants, machine tools, trains and railway cars
- Accommodates a range of connections—up to 64 wires for sturdy turned contact pins, up to 280 wires for economical crimp contact pins
- Designed with heavy duty screw clamp inserts that feature vibration-proof termination—so strong ferrules are unnecessary
- Equipped with a wide range of durable hoods and housings that are:
  - Heat Resistant Thermoplastic

**OR**

- Standard Metal—zinc alloy cast or aluminum cast plating base material, both with a powder painted finish for knock and wear resistance

**OR**

- Corrosion-Protected—manufactured from cast aluminum with anodized surface to inhibit corrosion

Weidmuller has three different types of heavy-duty connectors to choose from, depending on the type of insert required for your application: Basic, Through Panel and Modular.

### BASIC CONNECTORS

- For connecting free standing cable assemblies
- Screw clamp or crimp contact termination
- Single male or female inserts, completely enclosed by the hood or housing

#### SELECTION OF BASIC CONNECTORS

- Determine the application requirements—wire and electrical requirements
- Determine the insert series and size—based on application and space constraints
- Select the male insert—available with either screw clamp or crimp contact termination
- Select the female insert—choose the female insert with same termination type as male insert
- Select the hood—choose the appropriate position of cable entry, locking of the levers or spigots and type of configuration
- Select the housing—either Bulkhead, Base or Couple Housing
- Select the appropriate accessories and tools—we offer a full range of products for your application, including dome plugs, fittings, reducers, spacers, covers, coding pins, jumpers, locking latches and adapter plates



## THROUGH-PANEL CONNECTORS

- Used to connect field wiring to control cabinets
- Screw clamp or crimp contact termination on hood side of connector
- Screw clamp on bulkhead housing (cabinet) side



## MODULAR CONNECTORS

- Allows for different sizes of wire and/or different types of wiring to be included in a single hood or housing
- Can accommodate signal and power wiring in the same connector
- System's flexibility lets you act on last minute configuration decisions—reducing development, inventory and order processing costs



### MODULAR PRODUCT LINE:

#### CONCEPT SERIES—MODULAR CONNECTOR SYSTEM

- Select the combination of connectors (modules)—required for customized application or field configurable cable assemblies
- Insertion frames for 2, 3, 5 or 7 modules
- Features 6 pin and socket combinations with 3-20 poles
- Free choice of economical crimp connection or tension clamp connection technology for vibration-resistant, labor-saving installations

#### MODUFLEX C - MODULAR CONNECTOR SYSTEM

- Modular connectors with non-metal housing for an economical solution
- For indoor applications, IP 20 (NEMA 1)
- Can be mounted on terminal rails or secured on surfaces or wall entries
- Up to 5 coupling frames can be assembled in one block

## HEAVY DUTY CONNECTOR KITS

Weidmuller has made selecting and ordering the products you need simpler, faster and more economical with our Heavy Duty Connector Kits.

- Prepackaged sets come complete with male and female insert, bulkhead housing and hood
- Listed under one part number
- Kit price is less than the total price of these parts purchased separately



Description	Part No.	Description	Part No.
HDC-KIT-HE 06.100	1712460000	HDC-KIT-HE 10.111	1712670000
HDC-KIT-HE 10.110	1712510000	HDC-KIT-HE 16.121	1712680000
HDC-KIT-HE 16.120	1712520000	HDC-KIT-HE 24.131	1712690000
HDC-KIT-HE 24.130	1712530000	HDC-KIT-HE 06.200	1712700000
HDC-KIT-HE 32.140	1712540000	HDC-KIT-HE 10.210	1712710000
HDC-KIT-HE 48.150	1712550000	HDC-KIT-HE 16.220	1712720000
HDC-KIT-HE 06.101	1712660000	HDC-KIT-HE 24.230	1712730000




# PCB Terminal Blocks

## Free Choice of:


### TERMINATION STYLES



■ Screw Clamp



■ Tension Clamp



■ TOP Clamp



■ Leaf Spring



■ Push-on Tab Connection

### PITCHES (MM)

- 3.50
- 5.00
- 5.08
- 6.35
- 7.50
- 7.62
- 9.52
- 10.00
- 10.16
- 15.00

### CONFIGURATION

- Single-, as well as double- and triple-level for higher packaging density on PCBs

### ORIENTATIONS

- 90°
- 135°
- 180°
- Low and High Profile
- Offset Left or Right

### COLOR

- Orange
- Black
- Gray

Check complete PCB Products Catalog for specific series color options and additional pole versions.

## PM SERIES

- Leaf spring screw clamp termination
- Low cost, reliable terminal for commercial applications
- 5.08 mm pitch
- 300 V, 16 A UL rating
- Available in 2-16 pole versions




Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	PM 5.08/2/90	OG	<b>1760490000</b>	3	PM 5.08/3/90	OG	<b>1760500000</b>
2	PM 5.08/2/90	BK	<b>1760510000</b>	3	PM 5.08/3/90	BK	<b>1760520000</b>



■ Leaf Spring

## LP SERIES

- Gas-tight screw clamp termination
- Single-, double- and triple-level blocks for high density applications
- Available in 5.00, 5.08, 7.50, 7.62, 10.00 and 15.00 mm pitch
- 90°, 135° and 180° wire orientation
- Available with test points
- Wire size range: 26...12 AWG
- 300 V, 15 A UL rating
- Wide range of accessories available:
  - disconnect terminals
  - disconnect elements
  - fuse holders
  - test plugs
  - LED holders
- Double- and triple-level blocks are footprint compatible with LM (screw clamp) and LMZF (tension clamp) terminal block series for added flexibility




■ Screw Clamp

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	LP 5.00/2/90	BK	<b>1696060000</b>	6	LP3R 5.08/6/90	OG	<b>1653940000</b>
3	LP 5.00/3/90	BK	<b>1696070000</b>	9	LP3R 5.08/9/90	OG	<b>1596330000</b>
2	LPP 5.00/2/90	BK	<b>1697140000</b>	12	LP3R 5.08/12/90	OG	<b>1596350000</b>
3	LPP 5.00/3/90	BK	<b>1697150000</b>	15	LP3R 5.08/15/90	OG	<b>1596370000</b>
2	LP 5.00/2/135	BK	<b>1697180000</b>	18	LP3R 5.08/18/90	OG	<b>1596390000</b>
3	LP 5.00/3/135	BK	<b>1697190000</b>	24	LP3R 5.08/24/90	OG	<b>1596410000</b>
2	LP 5.00/2/180	OG	<b>1761350000</b>	2	LP 7.50/2/90	BK	<b>1697220000</b>
3	LP 5.00/3/180	OG	<b>1761360000</b>	3	LP 7.50/3/90	BK	<b>1697230000</b>
2	LP 5.08/2/90	BK	<b>1696040000</b>	2	LPP 7.50/2/90	BK	<b>1697260000</b>
3	LP 5.08/3/90	BK	<b>1696050000</b>	3	LPP 7.50/3/90	BK	<b>1697270000</b>
2	LPP 5.08/2/90	BK	<b>1697120000</b>	2	LP 7.50/2/135	BK	<b>1697300000</b>
3	LPP 5.08/3/90	BK	<b>1697130000</b>	3	LP 7.50/3/135	BK	<b>1697310000</b>
2	LP 5.08/2/135	BK	<b>1676740000</b>	2	LP 7.50/2/180	OG	<b>1761390000</b>
3	LP 5.08/3/135	BK	<b>1676750000</b>	3	LP 7.50/3/180	OG	<b>1761400000</b>
2	LP 5.08/2/180	BK	<b>1753830000</b>	2	LP 7.62/2/90	BK	<b>1697200000</b>
3	LP 5.08/3/180	BK	<b>1753840000</b>	3	LP 7.62/3/90	BK	<b>1697210000</b>
1	LPTR 5.08/1/90	BK	<b>1755190000</b>	2	LPP 7.62/2/90	BK	<b>1697240000</b>
4	LP2N 5.08/4/90	OG	<b>1635150000</b>	3	LPP 7.62/3/90	BK	<b>1697250000</b>
6	LP2N 5.08/6/90	OG	<b>1625550000</b>	2	LP 7.62/2/135	BK	<b>1697280000</b>
8	LP2N 5.08/8/90	OG	<b>1596470000</b>	3	LP 7.62/3/135	BK	<b>1697290000</b>
10	LP2N 5.08/10/90	OG	<b>1596500000</b>	2	LP 7.62/2/180	BK	<b>1753910000</b>
12	LP2N 5.08/12/90	OG	<b>1632560000</b>	3	LP 7.62/3/180	BK	<b>1753920000</b>
16	LP2N 5.08/16/90	OG	<b>1596520000</b>				



### LM SERIES

- Gas-tight screw clamp termination
- Low-profile — designed for applications where space is at a premium
- Single-, double- and triple-level blocks for high density applications
- Available in 3.50, 5.00 and 5.08 mm pitch
- 90°, 135° and 180° wire orientation
- Wire size range: 26...12 AWG
- 300 V, 10 A UL rating
- Available in 2- and 3-pole versions which can be dovetailed together
- Double- and triple-level blocks are footprint compatible with LP (screw clamp) and LMZF (tension clamp) terminal block series for added flexibility



■ Screw Clamp

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	LM 3.5/2/90	BK	<b>1699670000</b>	3	LM 5.08/3/90	BK	<b>1716030000</b>
3	LM 3.5/3/90	BK	<b>1699680000</b>	2	LM 5.08/2/135	BK	<b>1716060000</b>
2	LM 3.5/2/135	BK	<b>1715010000</b>	3	LM 5.08/3/135	BK	<b>1716070000</b>
3	LM 3.5/3/135	BK	<b>1715050000</b>	2	LM 5.08/2/180	BK	<b>1716040000</b>
4	LM2N 3.5/4/90	BK	<b>1720000000</b>	3	LM 5.08/3/180	BK	<b>1716050000</b>
6	LM2N 3.5/6/90	BK	<b>1720010000</b>	4	LM2N 5.08/4/90	BK	<b>1769080000</b>
8	LM2N 3.5/8/90	BK	<b>1720020000</b>	6	LM2N 5.08/6/90	BK	<b>1769090000</b>
10	LM2N 3.5/10/90	BK	<b>1720030000</b>	8	LM2N 5.08/8/90	BK	<b>1769100000</b>
12	LM2N 3.5/12/90	BK	<b>1720040000</b>	10	LM2N 5.08/10/90	BK	<b>1769110000</b>
16	LM2N 3.5/16/90	BK	<b>1720060000</b>	12	LM2N 5.08/12/90	BK	<b>1769120000</b>
2	LM 5.00/2/90	BK	<b>1715250000</b>	16	LM2N 5.08/16/90	BK	<b>1769140000</b>
3	LM 5.00/3/90	BK	<b>1715260000</b>	6	LM3R 5.08/6/90	BK	<b>1769930000</b>
2	LM 5.00/2/135	BK	<b>1715290000</b>	9	LM3R 5.08/9/90	BK	<b>1769940000</b>
3	LM 5.00/3/135	BK	<b>1715300000</b>	12	LM3R 5.08/12/90	BK	<b>1769950000</b>
2	LM 5.00/2/180	BK	<b>1715270000</b>	15	LM3R 5.08/15/90	BK	<b>1769960000</b>
3	LM 5.00/3/180	BK	<b>1715280000</b>	18	LM3R 5.08/18/90	BK	<b>1769970000</b>
2	LM 5.08/2/90	BK	<b>1716020000</b>	24	LM3R 5.08/24/90	BK	<b>1769990000</b>

**APPLICATION NOTE:**  
Ideal for high-density PCB applications

### LMZF SERIES

- Tension clamp termination for reduced wiring time – no special tools needed
- Single-, double- and triple-level blocks for high density applications
- Available in 5.08 mm pitch
- Double- and triple-level blocks are footprint compatible with screw clamp versions for added flexibility
- 300 V, 10 A UL rating




■ Tension Clamp

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	LMZF 5.08/2/90	BK	<b>1721640000</b>	10	LM2NZF 5.08/10/135	OG	<b>1764840000</b>
3	LMZF 5.08/3/90	BK	<b>1721650000</b>	12	LM2NZF 5.08/12/135	OG	<b>1764850000</b>
2	LMZF 5.08/2/135	BK	<b>1734220000</b>	16	LM2NZF 5.08/16/135	OG	<b>1764870000</b>
3	LMZF 5.08/3/135	BK	<b>1734230000</b>	6	LM3RZF 5.08/6/135	OG	<b>1764910000</b>
2	LMZF 5.08/2/180	BK	<b>1722400000</b>	9	LM3RZF 5.08/9/135	OG	<b>1764920000</b>
3	LMZF 5.08/3/180	BK	<b>1722410000</b>	12	LM3RZF 5.08/12/135	OG	<b>1764930000</b>
4	LM2NZF 5.08/4/135	OG	<b>1764810000</b>	15	LM3RZF 5.08/15/135	OG	<b>1764940000</b>
6	LM2NZF 5.08/6/135	OG	<b>1764820000</b>	18	LM3RZF 5.08/18/135	OG	<b>1764950000</b>
8	LM2NZF 5.08/8/135	OG	<b>1764830000</b>	24	LM3RZF 5.08/24/135	OG	<b>1764960000</b>

**TOP 4 GS, TOP 1.5 GS**

- Screw clamp termination
- For space restrictive applications that require wire and screwdriver access in same plane
- Available in 5.08, 6.35 and 7.62 mm pitch

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	TOP 1.5GS 5.08/2/90	OG	<b>1785590000</b>	3	TOP 4GS 6.35/3/180	OG	<b>1786200000</b>
2	TOP 1.5GS 5.08/2/90	BK	<b>1785700000</b>	3	TOP 4GS 6.35/3/180	BK	<b>1786310000</b>
3	TOP 1.5GS 5.08/3/90	OG	<b>1785600000</b>	2	TOP 1.5GS 7.62/2/90	OG	<b>0393360000</b>
3	TOP 1.5GS 5.08/3/90	BK	<b>1785710000</b>	3	TOP 1.5GS 7.62/3/90	OG	<b>1726210000</b>
2	TOP 1.5GS 5.08/2/180	OG	<b>1785810000</b>	2	TOP 1.5GS 7.62/2/180	OG	<b>0391360000</b>
2	TOP 1.5GS 5.08/2/180	BK	<b>1785920000</b>	3	TOP 1.5GS 7.62/3/180	OG	<b>0391460000</b>
3	TOP 1.5GS 5.08/3/180	OG	<b>1785820000</b>	2	TOP 4GS 7.62/2/90	OG	<b>0289660000</b>
3	TOP 1.5GS 5.08/3/180	BK	<b>1785930000</b>	2	TOP 4GS 7.62/2/90	BK	<b>1751780000</b>
2	TOP 4GS 6.35/2/90	OG	<b>1401760000</b>	3	TOP 4GS 7.62/3/90	OG	<b>0289760000</b>
2	TOP 4GS 6.35/2/90	BK	<b>1786110000</b>	3	TOP 4GS 7.62/3/90	BK	<b>1786460000</b>
3	TOP 4GS 6.35/3/90	OG	<b>1650300000</b>	2	TOP 4GS 7.62/2/180	OG	<b>0298360000</b>
3	TOP 4GS 6.35/3/90	BK	<b>0265910000</b>	2	TOP 4GS 7.62/2/180	BK	<b>1786590000</b>
2	TOP 4GS 6.35/2/180	OG	<b>1786190000</b>	3	TOP 4GS 7.62/3/180	OG	<b>0298460000</b>
2	TOP 4GS 6.35/2/180	BK	<b>1786300000</b>	3	TOP 4GS 7.62/3/180	BK	<b>1786600000</b>




■ TOP Clamp

**LL 9.5**

- 9.5 mm screw clamp termination
- Touch-safe alternative to barrier strips
- Gas-tight, self-locking clamping yoke for more security and faster wiring than barrier strips
- Compact design saves space
- Designed for limited high voltage applications up to 600 V, 5 A UL and standard applications up to 300 V, 30 A UL rating

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	LL 9.5/2/90	OG	<b>1724680000</b>	3	LL 9.5/3/90	OG	<b>1724690000</b>
2	LL 9.5/2/90	BK	<b>1724700000</b>	3	LL 9.5/3/90	BK	<b>1724710000</b>



■ Screw Clamp

**LU 10.16**

- Screw clamp termination
- Designed for high-power, high-current applications
- Large pitch for automation equipment
- Available with 2 or 4 solder pins per pole
- 90° wire orientation

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	LU 10.16/2/90 2 PIN	GY	<b>1648310000</b>	2	LU 10.16/2/90 4 PIN	GY	<b>1636170000</b>
3	LU 10.16/3/90 2 PIN	GY	<b>1648300000</b>	3	LU 10.16/3/90 4 PIN	GY	<b>1636180000</b>



■ Screw Clamp

**APPLICATION NOTE:**  
Ideal for motor drives applications

### GSE 10

- Screw clamp termination
- 10.16 mm pitch
- Large pitch for automation equipment
- Features integrated test points
- 180° wire orientation

**APPLICATION NOTE:**  
Ideal for automation and high power equipment applications



Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	GSE 10/2/180	GY	<b>9954140000</b>	3	GSE 10/3/180	GY	<b>0478900000</b>
4	GSE 10/4/180	GY	<b>9954150000</b>	5	GSE 10/5/180	GY	<b>9958360000</b>
6	GSE 10/6/180	GY	<b>9954160000</b>	7	GSE 10/7/180	GY	<b>9958370000</b>
8	GSE 10/8/180	GY	<b>9954170000</b>	9	GSE 10/9/180	GY	<b>9958380000</b>
10	GSE 10/10/180	GY	<b>9954180000</b>				



■ Screw Clamp

### LX 15.00 SERIES

- Gas-tight screw clamp termination
- 15.00 mm pitch
- Rating of 600 V, 85 A per UL 1059
- Available with or without mounting flanges
- Features integrated test points and heat dissipation vents
- Accommodates up to 4 AWG wire



Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
1	LX 15.00/1/90	GY	<b>1783660000</b>	2	LXB 15.00/2/90	GY	<b>1783710000</b>
2	LX 15.00/2/90	GY	<b>1783670000</b>	3	LXB 15.00/3/90	GY	<b>1783720000</b>
3	LX 15.00/3/90	GY	<b>1783680000</b>	4	LXB 15.00/4/90	GY	<b>1783730000</b>
4	LX 15.00/4/90	GY	<b>1783690000</b>	1	LXBL 15.00/1/90	GY	<b>1783700000</b>



■ Screw Clamp

**APPLICATION NOTE:**  
Designed specifically for drives technology, frequency converters and power supply applications.

### GSF 5

- Push-on tab wire termination
- 5.00 mm pitch
- Dual solder pin per pole



Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	GSF5/2/90	OG	<b>0496760000</b>	2	GSF5/2/180	OG	<b>0490860000</b>
3	GSF5/3/90	OG	<b>0496860000</b>	3	GSF5/3/180	OG	<b>0490960000</b>



■ Push-on Tab Connection



# PCB Connectors

## Free Choice of:


### TERMINATION STYLES



■ Screw Clamp



■ Tension Clamp



■ TOP Clamp




■ Leaf Spring



■ IDC



■ Crimp Clamp



■ Spring Connection

### PITCHES (MM)

- 3.50     ■ 5.00     ■ 5.08
- 7.50     ■ 7.62

### CONFIGURATION

- Single-, as well as double-level for higher packaging density on PCBs

### ORIENTATIONS

- 90°     ■ 110°     ■ 135°
- 180°   ■ 225°     ■ 270°

### MOUNTING OPTIONS

- Through-Hole
- Surface Mount Compatible
- Through-Hole Reflow

### UNIQUE APPLICATIONS

- Board-to-Board
- Rail Mount
- Wire-to-Wire
- Through-Panel

### ACCESSORIES

- Marking Strips
- Locking Tabs
- Coding
- Mounting Hardware
- Separation Elements
- Disconnect Aid
- Release Levers
- LEDs
- Cover Hoods
- Strain Relief

### COLOR


- Orange
- Black

Check complete PCB Products Catalog for specific series color options and additional pole versions.

## MINIMATE SERIES

### B2L/S2L 3.5 SERIES—DOUBLE-DENSITY

- Two connection rows - doubles connection density of standard 3.5 mm pitch systems
- Takes up to 30% less space in front panel applications and 10% less PCB space than 2.5/2.54 mm connectors
- Self-adjusting tension clamp requires no special tools
- Tin- or gold-plated contacts available
- Release lever for easy disconnect
- Open, closed and locking versions available
- Offered in 6-36 pole versions



■ Tension Clamp

Poles	Description	Color	Part No.	Other	Poles	Description	Color	Part No.	Other
6	S2L 3.5/6/90	BK	1728310000	tin-plated	6	S2L 3.5/6/90G	BK	1755520000	gold-plated
8	S2L 3.5/8/90	BK	1728320000	tin-plated	8	S2L 3.5/8/90G	BK	1755530000	gold-plated
6	S2L 3.5/6/90G	BK	1727990000	tin-plated	6	S2L 3.5/6/180	BK	1756800000	gold-plated
8	S2L 3.5/8/90G	BK	1728000000	tin-plated	8	S2L 3.5/8/180	BK	1756810000	gold-plated
6	S2L 3.5/6/90F	BK	1728630000	tin-plated	6	B2L 3.5/6/180	BK	1727640000	tin-plated
8	S2L 3.5/8/90F	BK	1728640000	tin-plated	8	B2L 3.5/8/180	BK	1727650000	tin-plated
6	S2L 3.5/6/180	BK	1729270000	tin-plated	6	B2L 3.5/6/180F	BK	1748170000	tin-plated
8	S2L 3.5/8/180	BK	1729280000	tin-plated	8	B2L 3.5/8/180F	BK	1748180000	tin-plated
6	S2L 3.5/6/180G	BK	1728950000	tin-plated	6	B2L 3.5/6/180LH	BK	1748490000	tin-plated
8	S2L 3.5/8/180G	BK	1728960000	tin-plated	8	B2L 3.5/8/180LH	BK	1748450000	tin-plated
6	S2L 3.5/6/180F	BK	1729590000	tin-plated	6	B2L 3.5/6/180	BK	1757390000	gold-plated
8	S2L 3.5/8/180F	BK	1729600000	tin-plated	8	B2L 3.5/8/180	BK	1757400000	gold-plated

#### APPLICATION NOTE:

Uses 10% less PCB space and up to 30% less front panel space than 2.5/2.54 mm connection systems.


## OMNIMATE SERIES

## BL/SL 3.5 SERIES - SINGLE- AND DOUBLE-LEVEL

High density connection system with free choice of clamping style:

- BL 3.5 screw clamp
- BLZF 3.5 tension clamp
- BLIDC 3.5 insulation displacement clamp
- BLIDC B 3.5 Bus version insulation displacement clamp
- 2-24 pole versions available in most styles
- Offered in open, closed and locking versions

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	SL 3.5/2/90	BK	1614130000	2	BL 3.5/2/180	BK	1615670000
3	SL 3.5/3/90	BK	1615300000	3	BL 3.5/3/180	BK	1615680000
2	SL 3.5/2/90G	BK	1614160000	2	BLZF 3.5/2/180	BK	1690420000
3	SL 3.5/3/90G	BK	1615420000	3	BLZF 3.5/3/180	BK	1690430000
2	SL 3.5/2/110	BK	1644500000	2	BLIDC 3.5/2	BK	1770940000
3	SL 3.5/3/110	BK	1644510000	3	BLIDC 3.5/3	BK	1770950000
2	SL 3.5/2/135	BK	1643810000	2	BLIDCB 3.5/2 Bus	BK	1770670000
3	SL 3.5/3/135	BK	1643820000	3	BLIDCB 3.5/3 Bus	BK	1770680000
2	SL 3.5/2/180	BK	1614210000	2	BL 3.5/2/90	BK	1638780000
3	SL 3.5/3/180	BK	1615930000	3	BL 3.5/3/90	BK	1638790000
2	SL 3.5/2/180G	BK	1614240000	2	BL 3.5/2/270	BK	1639700000
3	SL 3.5/3/180G	BK	1616020000	3	BL 3.5/3/270	BK	1639710000



■ Tension Clamp



■ IDC



■ Screw Clamp

## OMNIMATE SERIES

## SL-SMT 3.5/5.00/5.08

## SMT COMPATIBLE THROUGH-HOLE REFLOW PIN HEADERS

- High temperature housing suitable for all SMT soldering processes
- THR design eliminates need for Wave or hand solder process, reducing costs up to 30%
- Three packaging types including cardboard box, anti-static tape-on-reel or tray packaging make them efficient for high volume production
- THR pins provide 10 times the mechanical strength of gull-wing SMT components
- THR pin design allows double-sided PCBs for high packaging density
- Can be fully integrated into automated assembly machines
- Free choice of connection side—mates with all Omnimate Series socket connectors
- Offered in open, closed and innovative solder flange versions

Poles	Type	Color	Part No.	Poles	Type	Color	Part No.
2	SL-SMT 3.5/2/90G	BK	1761542001	3	SL-SMT 5.08/3/90	BK	1774772001
2	SL-SMT 3.5/2/90G	BK	1761544001	3	SL-SMT 5.08/3/90	BK	1774774001
3	SL-SMT 3.5/3/90G	BK	1761552001	2	SL-SMT 5.08/2/90G	BK	1775002001
3	SL-SMT 3.5/3/90G	BK	1761554001	3	SL-SMT 5.08/3/90G	BK	1775012001
2	SL-SMT 3.5/2/90LF	BK	1762002001	2	SL-SMT 5.08/2/90LF	BK	1775232001
3	SL-SMT 3.5/3/90LF	BK	1762012001	3	SL-SMT 5.08/3/90LF	BK	1775242001
2	SL-SMT 3.5/2/180G	BK	1752982001	2	SL-SMT 5.08/2/180	BK	1775522001
3	SL-SMT 3.5/3/180G	BK	1752992001	3	SL-SMT 5.08/3/180	BK	1775572001
2	SL-SMT 3.5/2/180LF	BK	1760962001	2	SL-SMT 5.08/2/180G	BK	1775922001
3	SL-SMT 3.5/3/180LF	BK	1760972001	3	SL-SMT 5.08/3/180G	BK	1775932001
2	SL-SMT 5.08/2/90	BK	1774762001	2	SL-SMT 5.08/2/180LF	BK	1776362001
2	SL-SMT 5.08/2/90	BK	1774764001	3	SL-SMT 5.08/3/180LF	BK	1776372001

Part number suffix 2001 indicates box packaging.

Part number suffix 4001 indicates tape-on-reel packaging.




■ Surface Mount  
Through-Hole  
Reflow

**APPLICATION NOTE:**  
Reduced application time

## OMNIMATE SERIES

## BL I/O 3.5 - PLUGGABLE FIELD DEVICE CONNECTORS

- Spring connection—push-in technology, fingernail or screwdriver activated
- 3.50 mm pitch
- Single- and triple-row versions—10 or 30 poles
- Internal jumpering for power distribution
- Integrated LED module available
- Offers the functionality of an 8-channel I/O level with the simplicity and space savings of pluggable connectors



■ Spring Connection

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
30	BL-I/O 3.5/30/180F	BK	<b>1779920000</b>	10	BL-I/O 3.5/10/180F	BK	<b>1779880000</b>
30	BL-I/O 3.5/30/180F LED	BK	<b>1789110000</b>	10	BL-I/O 3.5/10/180F LED	BK	<b>1789090000</b>
30	BL-I/O 3.5/30/180FP	BK	<b>1779910000</b>	10	BL-I/O 3.5/10/180FP	BK	<b>1779870000</b>
30	BL-I/O 3.5/30/180FP LED	BK	<b>1789100000</b>	10	BL-I/O 3.5/10/180FP LED	BK	<b>1789080000</b>

## OMNIMATE SERIES

## BL/SL 5.00/5.08 SERIES - SINGLE- AND DOUBLE-LEVEL


- 5 orientations to offer more design flexibility
- High density single and double level connection system
- 2-24 pole versions available for most variations
- Offered in open, closed and locking versions
- Free choice of clamping style:
  - BLZ screw clamp
  - BL leaf spring
  - BLT TOP clamp
  - BLC crimp clamp
  - BL IDC insulation displacement clamp
  - BLZF tension clamp
  - BLDT double plug for bus wiring



■ Tension Clamp



■ IDC



■ Screw Clamp



■ TOP Clamp



■ Leaf Spring



■ Crimp Clamp

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	SL 5.00/2/90	BK	<b>1625990000</b>	2	SL 5.08/2/180	BK	<b>1521810000</b>
3	SL 5.00/3/90	BK	<b>1626000000</b>	3	SL 5.08/3/180	BK	<b>1521910000</b>
2	SL 5.00/2/180	BK	<b>1626390000</b>	2	BL 5.08/2/180	BK	<b>1716470000</b>
3	SL 5.00/3/180	BK	<b>1626400000</b>	3	BL 5.08/3/180	BK	<b>1716480000</b>
2	BL 5.00/2/180	BK	<b>1730700000</b>	2	BLZ 5.08/2/180	BK	<b>1526410000</b>
3	BL 5.00/3/180	BK	<b>1730710000</b>	3	BLZ 5.08/3/180	BK	<b>1526510000</b>
2	BLZ 5.00/2/180	BK	<b>1625610000</b>	2	BLT 5.08/2/180	BK	<b>1499510000</b>
3	BLZ 5.00/3/180	BK	<b>1625620000</b>	3	BLT 5.08/3/180	BK	<b>1499610000</b>
2	BLZF 5.00/2/180	BK	<b>1696600000</b>	2	BLIDC 5.08/2	BK	<b>1759390000</b>
3	BLZF 5.00/3/180	BK	<b>1696610000</b>	3	BLIDC 5.08/3	BK	<b>1759400000</b>
2	SL 5.08/2/90	BK	<b>1512610000</b>	2	BLC 5.08/2/180R	BK	<b>1711960000</b>
3	SL 5.08/3/90	BK	<b>1512710000</b>	3	BLC 5.08/3/180R	BK	<b>1711970000</b>

More products are available than shown.

Please contact us or visit our website: [www.weidmuller.com](http://www.weidmuller.com).

**OMNIMATE SERIES**

**BL/SL 7.50/7.62 SERIES - SINGLE LEVEL**

- Larger pitch offering available in 3 wire orientations
- Free choice of clamping style:
  - BL screw clamp
  - BLZF tension clamp



Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	SL 7.50/2/90	BK	1628690000	2	SL 7.62/2/90	BK	1623820000
3	SL 7.50/3/90	BK	1628700000	3	SL 7.62/3/90	BK	1623830000
2	SL 7.50/2/180	BK	1629350000	2	SL 7.62/2/180	BK	1624700000
3	SL 7.50/3/180	BK	1629360000	3	SL 7.62/3/180	BK	1624710000
2	BLZ 7.50/2/180	BK	1628030000	2	BLZ 7.62/2/180	BK	1623160000
3	BLZ 7.50/3/180	BK	1628040000	3	BLZ 7.62/3/180	BK	1623170000
2	BLZF 7.50/2/180	BK	1722940000	2	BLZF 7.62/2/180	BK	1722720000
3	BLZF 7.50/3/180	BK	1722950000	3	BLZF 7.62/3/180	BK	1722730000
2	BLZ 7.50/2/90	BK	1701900000	2	BLZ 7.62/2/90	BK	1702780000
3	BLZ 7.50/3/90	BK	1701910000	3	BLZ 7.62/3/90	BK	1702790000
2	BLZ 7.50/2/270	BK	1702340000	2	BLZ 7.62/2/270	BK	1703220000
3	BLZ 7.50/3/270	BK	1702350000	3	BLZ 7.62/3/270	BK	1703230000



■ Tension Clamp



■ Screw Clamp

**UNIQUE APPLICATION CONNECTORS**

- SLS and SLZF pin plugs for rail-mount or free-hanging wire-to-wire, as well as inverse wire-to-board applications
- BLL socket header for touch safe PCBs and board-to-board applications
- SLDF front panel header for through-panel applications




Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	BLZF 5.08/2/180	BK	1707690000	2	SLZF 5.08/2/180	BK	1709600000
3	BLZF 5.08/3/180	BK	1707700000	3	SLZF 5.08/3/180	BK	1709610000
2	BLZF 5.08/2/180B	BK	1708530000	2	SLZF 5.08/2/180B	BK	1710440000
3	BLZF 5.08/3/180B	BK	1708540000	3	SLZF 5.08/3/180B	BK	1710450000
2	BLZF 5.08/2/90	BK	1671020000	2	SLZF 5.08/2/90	BK	1673320000
3	BLZF 5.08/3/90	BK	1671030000	3	SLZF 5.08/3/90	BK	1673330000
2	BLZF 5.08/2/90B	BK	1671480000	2	SLZF 5.08/2/90B	BK	1669910000
3	BLZF 5.08/3/90B	BK	1671490000	3	SLZF 5.08/3/90B	BK	1669920000
2	BLZF 5.08/2/270	BK	1672170000	2	SLZF 5.08/2/270	BK	1688660000
3	BLZF 5.08/3/270	BK	1672180000	3	SLZF 5.08/3/270	BK	1688670000
2	BLZF 5.08/2/270B	BK	1672630000	2	SLZF 5.08/2/270B	BK	1706370000
3	BLZF 5.08/3/270B	BK	1672640000	3	SLZF 5.08/3/270B	BK	1706380000


  

Poles	Description	Color	Part No.	Poles	Description	Color	Part No.
2	BLL 5.08/2/90	BK	1646030000	3	BLL 5.08/3/180	BK	1646260000
3	BLL 5.08/3/90	BK	1646040000	2	BLL 5.08/2/180B	BK	1684230000
2	BLL 5.08/2/90B	BK	1684000000	3	BLL 5.08/3/180B	BK	1684240000
3	BLL 5.08/3/90B	BK	1684010000	2	SLDF 5.08/2	BK	1635740000
2	BLL 5.08/2/180	BK	1646250000	3	SLDF 5.08/3	BK	1635750000


**SPECIALTY APPLICATIONS:**




■ Board-to-Board



■ Through-Panel



■ Wire-to-Wire



■ Rail-Mount



# Tools

**For over 25 years, Weidmuller has been designing and manufacturing tools from the highest quality materials.** These tools

reduce fatigue in repetitive use and are precision-crafted and assembled for long tool life.

We feature a full range of heavy-duty tools designed for industrial use. Our wire and cable cutters, wire strippers and crimpers are capable of handling wires ranging in size from 26 AWG to 750 MCM.



## CUTTING TOOLS

- Accurately prepares cables and conductors for different types of connections
- Full product range—tools for small to large wire sizes
- Designed to produce a smooth, straight cut without distortion of the conductor
- Precisely cuts copper and aluminum cables

### KT 8

- Cuts copper and aluminum cables up to 8 mm (0.31 in) diameter or 6 AWG

### KT 36

- Cuts copper and aluminum cables up to 35 mm (1.38 in) diameter or 500 MCM
- Designed for one-hand operation
- Blade release in any position
- Ratchet mechanism

### KT 45

- Cuts copper and aluminum cables up to 45 mm (1.78 in) diameter or 600 MCM
- Designed for one-hand operation
- Blade release in any position
- Ratchet mechanism



KT 8



KT 45



KT 36

Description	Part No.	Description	Part No.
KT 8	9002650000	KT 45	9002000000
KT 36	9001090000		

More products are available than shown.

Please contact us or visit our website: [www.weidmuller.com](http://www.weidmuller.com).



**STRIPPING TOOLS - STRIPAX® AND STRIPAX® 16**

- Designed to ensure precise preparation of conductor for further processing or for crimping
- Long working life
- Improved ergonomic design
- Stripping length adjustable by setting wire stop
- Adjustable to different insulation thickness
- Precise, self-adjusting wire/cable cutter



STRIPAX®

**STRIPAX®**

- Stripping and cutting tool for flexible, stranded and solid conductors with PVC insulation for cross-sections 0.08...6 mm<sup>2</sup> (28...10 AWG)
- 32 self-adjusting stripping blades precisely cut the insulator without damage to the conductor

**STRIPAX® 16**

- Stripping and cutting tool for flexible, stranded and solid conductors with PVC insulation for cross-sections 6...16 mm<sup>2</sup> (10...6 AWG)



STRIPAX 16®

**AM 25/35**

- Stripping tools for round PVC cables
- AM 25 is for round cables 4.5...25 mm (0.18...0.98 in) diameter/AM 35 is for round cables 25...36 mm (0.98...1.42 in) diameter
- Laser trimmed blade (replaceable)
- Swivel blade for circular, longitudinal and spiral cuts
- Adjustable cutting depth for insulation up to 4.5 mm (0.18 in) thickness



AM 25/35

Description	Part No.	Description	Part No.
stripax®	<b>9005000000</b>	AM 25	<b>9001540000</b>
stripax®16	<b>9005610000</b>	AM 35	<b>9001080000</b>

**NEW GENERATION OF FERRULE CRIMPING TOOLS**

- High-quality and precise tools designed to create an electrically and mechanically secure connection
- Broad product offering for all application needs
- New handle contour for reduced fatigue and improved ergonomics
- Offers 20% greater crimping force with 20% less manual force
- Long working life
- Standardized results for global applications

**STRIPAX® PLUS 2.5**

- Cuts, strips, crimps
- Automatic transport of ferrules
- Ratchet for precise crimping
- Only one tool needed for wire preparation
- Wire inserted in front for stripping, wire inserted from the side for cutting and crimping

**PZ/HTF/HTG/CTX SERIES OF CRIMPERS**

- Ratchet for precise crimping
- Ratchet release option in case of incorrect operation
- Adjustable locator for exact positioning of contacts (HTF series)

**PZ 4**

- For crimping ferrules according to DIN 46228 parts 1 and 4 with and without plastic collars from 0.5...4 mm<sup>2</sup> (20...12 AWG)
- One crimping profile for entire wire range
- Ferrule insertion from the side

**PZ 6/5**

- For ferrules according to DIN 46228 parts 1 and 4 with and without plastic collars from 0.25...6 mm<sup>2</sup> (24...10 AWG)
- Crimp conforms to EN-60947-1
- Five crimping profiles for rated conductor cross-sections
- Ferrule insertion from the side

**PZ 3**

- For ferrules according to DIN 46228 parts 1 and 4 with and without plastic collars from 0.75...6 mm<sup>2</sup> (18...10 AWG)
- One profile for entire wire range
- Ferrule insertion from the front

**PZ 6 ROTO**

- For ferrules according to DIN 46228 parts 1 and 4 with and without plastic collars from 0.25...6 mm<sup>2</sup> (24...10 AWG)
- Unique OMEGA spring provides correct compression regardless of ferrule size
- One profile for entire wire range
- Rotatable crimp die for ferrule insertion from the front or the side



stripax® plus 2.5



PZ 3



PZ 4



PZ 6 roto



PZ 6/5

Description	Part No.	Description	Part No.
stripax® plus 2.5	902000000	PZ 6 roto	901435000
PZ 4	901250000	PZ 6/5	901146000
PZ 3	056730000		

## TOOLS

### CRIMPING TOOLS, CONTINUED (HDC Terminals)

#### HTF RSV SERIES

- For Weidmuller RSV and DSTV-HD contacts

#### HTF SERIES

- For receptacles with open or rolled crimp barrels

#### HTF SUB-D/HTF SUB-HD

- SUB-D and SUB-HD contacts with open crimp barrels

#### CTX CM SERIES

- For HE-Series pin and socket contacts

#### HTG/HTX AND CTX SERIES OF CRIMPERS

- For coaxial connectors such as BNC, TNC and N connectors with RG 58, RG 59, RG 62, RG 71 and other cables
- Crimping profiles for center contact and outer sleeve
- Ratchet for precise crimping
- Ratchet release option in case of incorrect operation



HTF Series



CTX CM Series



HTF SUB-D/HTF SUB-HD



HTG Series

#### MTR 35/MTR 110

- Fast ratchet action for easy connector centering and crimping
- Ratchet release option in case of incorrect operation
- Precision mechanism enables high crimping pressure with low manual force
- Purely mechanical function guarantees safe and easy handling under all conditions
- Comprehensive range of crimping die sets conforming to standards
- Customer-specific crimping die sets available on request
- Hinged head for easy removal of the crimped connector
- Lockable hand lever for easy transportation

#### MTR 35

- For connectors such as tube cable lugs 6...50 mm<sup>2</sup> (10...0 AWG) and ferrules 25...50 mm<sup>2</sup> (4...0 AWG)

#### MTR 110

- For connectors such as tube cable lugs 10...120 mm<sup>2</sup> (8 AWG...250 MCM) and ferrules 70...95 mm<sup>2</sup> (00...000 AWG)



MTR 35



MTR 110

Description	Part No.	Description	Part No.
HTF SUB-D	9013260000	MTF SUB-HD	9013530000
MTR 35	9017500000	MTR 110	9018020000

## FERRULES

### WIRE END FERRULES


- Designed to ensure long-term consistent quality of electrical connection
- Features secure gas-tight crimp connection
- Easy insertion
- Standardized color coded for instant identification
- Uninsulated and insulated versions

Description	Part No.	Description	Part No.
H 1/14 18 AWG Yellow	0463000000	H 0.5/14 20 AWG Orange	0690700000
H 1.5/14 16 AWG Red	0463100000	H 1.0/145* 18 AWG Yellow	9025970000
H 0.75/14 18 AWG White	0462900000	H 2.5/14 14 AWG Blue	9019160000

\* slightly larger plastic collar diameter



FERRULES



Ferrules with plastic collars

Nominal cross-section (mm <sup>2</sup> )	AWG	Dimensions (mm)				Stripping length (mm)	Qty.	
		L1	L2	D1	D2			
0.14	0.14	26	10	6	0.6	1.5	8	500
	0.14	26	12	8	0.6	1.5	10	500
0.25	0.25	24	10	6	0.8	1.8	8	500
	0.25	24	12	8	0.8	1.8	10	500
0.34	0.34	22	10	6	0.8	2	8	500
	0.34	22	12	8	0.8	2	10	500
0.5	0.5	20	10	6	1	2.6	8	500
	0.5	20	12	6	1	2.6	8	500
0.5	0.5	20	14	8	1	2.6	10	500
	0.5	20	14	8	1	2.6	10	5000
0.5	0.5	20	16	10	1	2.6	12	500
	0.5	20	16	10	1	2.6	12	5000
0.75	0.75	18	12	6	1.2	2.8	8	500
	0.75	18	14	8	1.2	2.8	10	500
0.75	0.75	18	14	8	1.2	2.8	10	5000
	0.75	18	16	10	1.2	2.8	12	500
0.75	0.75	18	18	12	1.2	2.8	14	500
	0.75	18	18	12	1.2	2.8	14	5000
1	1	17	12	6	1.4	3	8	500
	1	17	14	8	1.4	3	10	500
1	1	17	14	8	1.4	3	11	5000
	1	17	16	10	1.4	3	12	500
1	1	17	18	12	1.4	3	15	500
	1	17	18	12	1.4	3	15	5000
1.5	1.5	16	14	8	1.7	3.2	10	500
	1.5	16	14	8	1.7	3.2	10	5000
1.5	1.5	16	14	8	1.7	3.2	10	500
	1.5	16	16	10	1.7	3.5	12	500
1.5	1.5	16	18	12	1.7	3.5	15	500
	1.5	16	24	18	1.7	3.5	20	500
2.5	2.5	14	14	8	2.2	4.2	10	500
	2.5	14	14	8	2.2	4	11	3000
2.5	2.5	14	14	8	2.2	4	11	500
	2.5	14	18	12	2.2	4.2	14	500
2.5	2.5	14	24	18	2.2	4.2	20	500
	2.5	14	24	18	2.2	4.2	20	5000
4	4	12	17	10	2.8	4.8	12	500
	4	12	20	12	2.8	4.8	14	500
4	4	12	26	18	2.8	4.8	20	500
	4	12	26	18	2.8	4.8	20	5000
6	6	10	20	12	3.5	6.3	14	100
	6	10	26	18	3.5	6.3	20	100
10	10	7	22	12	4.5	7.6	15	100
	10	7	28	18	4.5	7.6	21	100
16	16	6	24	12	5.8	8.8	15	100
	16	6	28	18	5.8	8.8	21	100
25	25	3	30	16	7.3	11.2	18	50
	25	3	36	22	7.3	11.2	24	50
35	35	2	30	16	8.3	12.7	19	50
	35	2	30	18	8.3	12.7	21	50
35	35	2	39	25	8.3	12.7	28	50
	35	2	39	25	8.3	12.7	28	5000
50...	50	1	36	20	10.3	15	26	50
	50	1	40	25	10.3	15	31	50
70	70	2/0	37	20	12.7	16	26	25
	70	2/0	37	20	12.7	16	26	2500
95	95	3/0	44	25	14.7	18	31	25
	95	3/0	44	25	14.7	18	31	2500
120	120	4/0	50	30	16.5	21	36	25
	120	4/0	50	30	16.5	21	36	2500
150	150	300 MCM	54	32	18.5	23.5	38	25
	150	300 MCM	54	32	18.5	23.5	38	2500

Strip pack 5 x 100 ferrules  
\*5 x 50 ferrules

Weidmuller standard

Type	Color	Part No.	Strip pack Part No.	Ferrules in strip form Part No.	Ferrules on reel Part No.
H 0.14/10	gray		9005180000		
H 0.14/12	gray		9028240000		
H 0.25/10	light blue	9025740000	9026050000		
H 0.25/12	light blue	9025760000	9025780000		
H 0.34/10	turquoise	9025750000	9026030000		
H 0.34/12	turquoise	9025770000	9025790000		
H 0.34/12	turquoise				9004390000
H 0.5/10	orange		9028260000		
H 0.5/12	orange	0409500000			
H 0.5/14	orange	0690700000	9026060000	9004270000	
H 0.5/14	orange				9005810000
H 0.5/16	orange	9025870000	9028270000		
H 0.75/12	white	0409600000	9028280000		
H 0.75/14	white	0462900000	9026070000	9004290000	
H 0.75/14	white				9005820000
H 0.75/16	white	9025860000	9028290000		
H 0.75/18	white	9025910000	9028300000		
H 1/12	yellow	0409700000	9028310000		
H 1/14	yellow	0463000000	9026080000	9004320000	
H 1/14	yellow				9005830000
H 1/16	yellow	9025950000	9028320000		
H 1/18	yellow	9025930000	9028340000		
H 1.5/14	red	0463100000	9026090000		
H 1.5/14	red				9005840000
H 1.5/14	red			9004340000	
H 1.5/16	red	0635100000	9028350000		
H 1.5/24	red	0565600000			
H 2.5/14 D	blue	9019160000	9026100000		
H 2.5/14 D	blue				9005850000
H 2.5/14 D	blue			9004360000	
H 2.5/18 D	blue	9019170000			
H 2.5/24 D	blue	9019180000			
H 4/17 D	gray	9019190000	9026010000*		
H 4/20 D	gray	9019200000			
H 4/26 D	gray	9019210000			
H 6/20	black	0533500000			
H 6/26	black	0565700000			
H 10/22	ivory	0534200000			
H 10/28	ivory	0565800000			
H 16/24	green	0565900000			
H 16/28	green	0566000000			
H 25/30	brown	0317000000			
H 25/36	brown	0317100000			
H 35/30	beige	0317200000			
H 35/39	beige	0317300000			
H 50/36	olive	0444200000			
H 70/40	yellow	9028200000			
H 95/44	red	9028210000			
H 120/50	blue	9028220000			
H 150/54	yellow	9028230000			

More products are available than shown.  
Please contact us or visit our website: [www.weidmuller.com](http://www.weidmuller.com).

**AUTOMATIC MACHINES**

**CRIMPFIX "L"**

- Electronically controlled electrical/pneumatic driven stripping and crimping machine
- Fully automated
- 0.5...2.5 mm<sup>2</sup> (20...14 AWG) wire range
- Wire and ferrule size selector makes changing dies unnecessary
- Large capacity hopper holds 500-1000 loose ferrules, depending on ferrules size
- Accepts loose ferrules
- Completed crimping cycle is less than 2 seconds per crimp
- Two position selector switch for strip-only mode or strip and crimp mode
- Recommended for high-volume ferrule applications

**CUTFIX 8**

- Electrically driven cutting machine
- Cuts single/flexible wires up to 8 mm (.1 in.)
- Microprocessor controlled for precision cuts

**POWERSTRIPPER 6.0**

- Electrically driven stripper
- Strips flexible conductors DIN VDE 0295, KL. 5
- Full or partial stripping, the insulation hangs on end of conductor
- No tool change required for different size wires
- Easy and quick adjustment to conductor cross-section
- Stripping range 0.14...0.6 mm<sup>2</sup> (26...10 AWG)



Cutfix 8



Crimpfix L



Powerstripper 6.0

Description	Part No.	Description	Part No.
Cutfix 8 (120 V)	67602058	Powerstripper 6.0 (120 V)	9050180000
Crimpfix "L" (120 V)	9025290000		

**NEW**

**TORQUE SCREWDRIVERS**

- Used for screw connections and direct push-fit method
- Ergonomically designed for high efficiency

**DMS-M/DMSI-M**

- Compact and lightweight
- Standard slot, Pozidrive and Phillips bits available
- Easily adjustable to your specific torque range
- Integrated window for viewing the scale
- Ergonomic handle size to match the torque range
- Audible and physically noticeable "click" signaling the correct torque
- Exchangeable bits made from high grade abrasive resistant tool steel
- Accurate to +/- 6% of set value

**SDI/SD**

- VDE-insulated slot-head screwdrivers
- Designed to DIN and VDE standards for slotted and Phillips head screws
- Insulated handles and shafts for working on live systems
- Ergonomically designed to reduce fatigue



DMS-M and DMSI-M



SDI/SD

Description	Range	Part No.
DMS-M	0.5-1.7 Nm	9918370000
DMSI-M	2.0-8.0 Nm	9918390000


Description	Dimensions mm(in.)			Part No.
	A	B	C	
SDI	0.4 (0.016)	2.5 (0.10)	75(3.0)	9008370000
SDI	0.5 (0.020)	3.0 (0.12)	100(3.9)	9008380000
SDI	0.6 (0.024)	3.5 (0.14)	100(3.9)	9008390000
SDI	0.8 (0.030)	4.0 (0.16)	100(3.9)	9008400000
SDI	1.0 (0.040)	4.5 (0.18)	125(4.9)	9008910000
SDI	1.0 (0.040)	5.5 (0.22)	125(4.9)	9008410000
SDI	1.2 (0.050)	6.5 (0.25)	150(5.9)	9008420000
SDI	1.6 (0.062)	8.0 (0.30)	175(6.9)	9008430000



# Marking Systems Products

## MARKING SYSTEMS

- Products and complete systems that clearly and visibly identify all operational materials, such as cables, connectors, terminal blocks and equipment
- Markings based on a system of color codes or markings with the number of the connection
- Extensive range of marking systems for various application needs
- Multi-digit
- White or colored
- Ready-to-use markers pre-printed with the majority of commonly used numbers, letters and symbols used by electricians and systems integrators
- Ready-to-use custom-printed markers—easy to use, incur no storage costs and make the best use of materials
- Blank markers for inscription on-site deliver quick and professional results with our complete range of on-site machine-assisted hardware and software
- Individually printed marking or comprehensive group marking

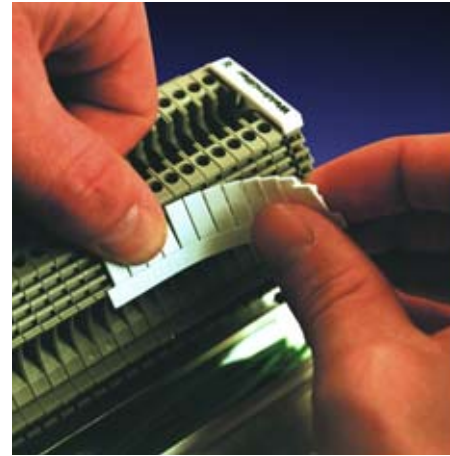

### TERMINAL MARKERS—PREPRINTED

#### DEKAFIX (DEK)

- Suitable for all Weidmuller wiring and plug-in connectors
- Intended for use with Weidmuller SAK-, W- and Z-Series
- Flush-fitting for optimal and secure fit
- Suitable for short sequences of numbers
- Strip assembly for rapid fit in one operation
- Available in all colors of international color code
- Also for individual printing



### TERMINAL MARKERS—CUSTOM PRINT

#### MULTICARD FOR PRINTJET/ PLOTTER MARKING

- Computer-based marking system that links M-Print software and IP 220 Plotter unit for terminal block tags, wire and cable markers and equipment identification
- Every MultiCard has the same external dimensions so that only one plotter frame is required
- Designed for Weidmuller terminals, 3rd party terminals, conductors, cables and equipment
- Easy sorting facilitates handling
- Tabs are easily separated
- Project description area can be produced above tags
- Single tags can be attached in strips to simplify marking
- Custom marked labels in strips will reduce marking cost



WS Strip Tab System



PrintJet

TERMINAL MARKERS—CUSTOM, CONTINUED

**DEK TABS IN MULTICARD FORMAT**

- Compact size enables them to be used with all Weidmuller terminals
- Suitable for short character sequences

**WS TABS IN MULTICARD FORMAT**

- Designed specifically for use with Weidmuller W-Series terminals
- Suitable for longer character sequences

**ZS TABS IN MULTICARD FORMAT**

- Suitable for use with the compact Z-Series terminals
- Feature a hinged carrier—tags can be folded upwards, if required, in order to access the cross-connections

**GWS TABS IN MULTICARD FORMAT**

- Suitable for use with all types of terminals supplied by Woertx and Allen-Bradley

**MULTIFIT TABS (THIRD PARTY MARKING)**

- Available in MultiCard format for in-house printing using the plotter system
- Offers a wide range of ready-to-use printed markers for non-Weidmuller terminals from Phoenix, Wago, Sprecher + Schuh, Wieland, Entrelec and Telemecanique
- One marker required for 6 suppliers saves on both storage space and costs
- Ready-to-use printed markers with standard print
- Ready-to-use individual markers, marked by Weidmuller in accordance with your CAD files or lists
- Project identifier section assigned to each strip



DEK Tabs in MultiCard Format



ZS Tabs in MultiCard Format



WS Tabs in MultiCard Format



GWS Tabs in MultiCard Format



Multifit Tabs (Third Party Marking)

Description	Part No.	Description	Part No.
Dekafix FS 6, vert. MKD 1-50	<b>468760001</b>	WS 12/5 Multi Card	<b>1609860000</b>
Dekafix FW 5, horz. MKD 1-50	<b>473460001</b>	WS 12/6 Multi Card	<b>1609900000</b>
Dekafix FS 5, vert. MKD 1-50	<b>473560001</b>	MF 10/6 Blank, White	<b>1677220000</b>

PCB CONNECTORS AND TERMINAL BLOCK MARKERS

**KSW MARKING STRIPS**

- Allows easy identification of specific termination points
- Features adhesive—may be affixed to printed circuit board terminal blocks to simplify field wiring and installation by clearly identifying circuits



## CABLE MARKER SYSTEM



- Marking systems for:
  - Full range of applications—from thin wires to heavy cables
  - Marking with numbers from a standard character set
  - The combination of individual pre-printed letters and numbers to customize one-of-a-kind printing
- Halogen-free and low-pollutant material



## SLIMFIX

- Wire marker
- 10 sizes for conductor cross-section from 0.25 mm<sup>2</sup>...16 mm<sup>2</sup> (24...6 AWG)
- 2 sleeve lengths: 21 mm and 12 mm (0.83 in and 0.47 in)
- Available in white, yellow, red and blue
- Tight fit on wire
- User-friendly and time-saving Multicard format inserts
- Project data can be printed on side of MultiCard for easy recognition after storing

## SLIMFIX CLIP

- Open and closed cable marker designed for flexibility and safety
- Tight fit on cable due to compression spring effect molded into marker
- Due to closing mechanism it is possible to attach marker after conductor is terminated

- User-friendly and time-saving Multicard format for standard and custom printing requirements
- Project data can be printed on Multicard borders for easy recognition after storing
- One size for conductor cross-section from 0.5 mm<sup>2</sup>...2.5 mm<sup>2</sup> (20...14 AWG)
- Marker length: 12 mm (0.47 in)

## PARTEX PA

- Marking system for non-terminated cables
- Sleeve form ensures a captive fit to cable
- 4 sizes for cable cross-section from 0.5 mm<sup>2</sup>...70 mm<sup>2</sup> (20...2/0 AWG)

## PK

- Flexible fitting with cable ties for large cross-sections
- Sleeves will be combined on PKH retaining strip



SlimFix



partex PA




SlimFix Clip



PK

## EQUIPMENT MARKER SYSTEM

- Offers the classical adhesive method and the quick slot-in method with true-to-original plates
- Inscribe manually or utilize our software for use on a printer or plotter system
- Available as ready-to-use markers
- Bar code or graphics can be printed for special applications

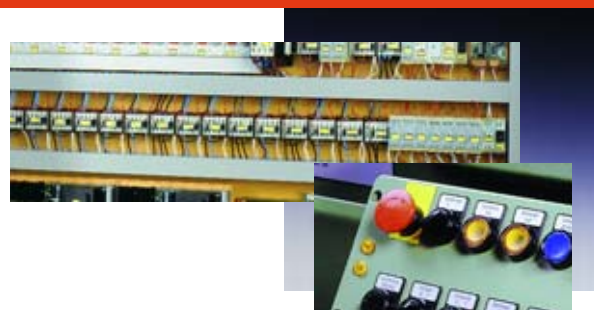






# Marking Systems Products

## MARKING EQUIPMENT

- An effective combination of efficient hardware and user-friendly software
- Designed to produce terminal, conductor and equipment markers quickly and cost-effectively
- Integrates order information—project, customer and batch—with the basic marking data to create an optimally coordinated process

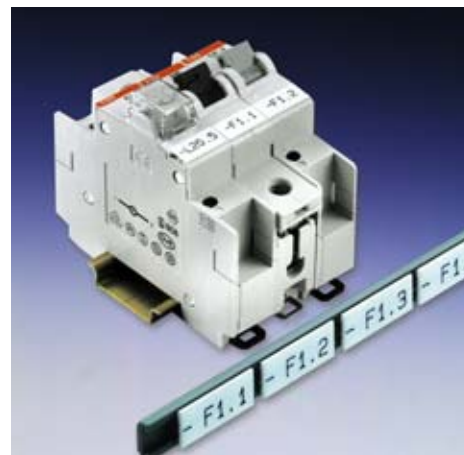

## PRINTJET II PRINTER

The only system of its kind on the market today, the exceptional print quality of the PrintJet II raises the bar of conventional inkjet performance to a higher level. The PrintJet II is a remarkable and innovative tool for marking terminal block tags, wire and cable markers and equipment markers—surpassing every print system for tags and markers in the market of equal price with its flexibility, speed and print quality.



PrintJet II Printer

- EASY TO USE
- Inkjet technology
- Same self-contained, disposable cartridges used in standard inkjet printers
- Cartridge prints 200,000 characters (Arial, 6 pt)
- Unique thermal heating process for smear/smudge resistant print
- Markers are ready-to-use—no waiting for ink to dry or cure
- Photo quality—up to 2880 dpi
- Prints up to 200 tags per minute
- Designed to work with Weidmuller's full line of MultiCard markers
- Optional MultiCard magazine—holds 5-20 cards
- Uses M-Print marking software—included
- Hardware/software compatible with all Windows operating systems

Description	Part No.
PrintJet II Printer	<b>1858980000</b>



# Marking Systems Solutions

When it comes to marking solutions, Weidmuller has a one-system approach that's right on the money. We can mark up to 95% of the products in your panel. Weidmuller is with you from start to finish, reducing your total costs through faster, more efficient products and services.

Weidmuller is your "one-stop shop" with a hardware/software marking solution for every need.

## MARKING SOFTWARE & SERVICES

- Produce your own markers or choose to have them made by Weidmuller's trained specialists
- Programs include various import functions enabling the easy transfer of data directly from your CAD system
- Utilize simple Windows® features such as 'copy' and 'paste' or Windows® Clipboard to assist in exchanging data with other Windows® programs such as Word and Excel
- Enter data manually or with an automatic numbering function—permits simple production of labels, consecutive numbers and repetitive sequences
- User-friendly features such as structured menu prompting and detailed online help
- WYSIWYG display (what you see is what you get) of the tag or label prevents misalignments or offset printing
- Can be used with Windows® 95/98, 2000, NT and XP operating systems
- Software is provided on CD-ROM, available in English, German and Spanish



### M-PRINT


- Software solution for the printing of terminal block tags, wire and cable markers and equipment labels
- Use with PrintJet Printer or IP-220 plotter to print on all MultiCard formats
- Database contains all Weidmuller terminal blocks, most competitors' terminal blocks and a complete assortment of labels for wire and cable marking—printable on laser and dot matrix printers
- Software updates are available free of charge at [www.weidmuller.com](http://www.weidmuller.com)

### M-LABEL

- Software solution for the printing of labels containing a number of different field types
- Prints multiple fonts, sizes, shapes, graphics, barcodes and logos
- Over 100 pre-defined label styles in database
- Includes special electro-industry-specific character file
- Expandable database—add other labels or customize
- Supports all Windows®-installed printers and true-type fonts
- Text data can be input manually or with an automatic numbering function



M-Print



M-Label



M-COMM 2

## CUSTOM SERVICES

Weidmuller technicians will provide custom marking solutions for your assemblies, terminals, equipment, cables and wires.













Table with 4 columns: Description, Part No., Page No., and Description. It lists various electronic components and their specifications in three columns. The items include sensors, diodes, capacitors, and other electronic parts with their respective part numbers and page references.





Argentina  
Australia  
Austria  
Bahrain  
Belarus  
Belgium  
Brazil  
Bulgaria  
Canada  
Chile  
China  
Colombia  
Croatia  
Czech Republic  
Denmark  
Estonia  
Finland  
France  
Germany  
Greece  
Hong Kong  
Hungary  
India  
Indonesia  
Iran  
Ireland  
Israel  
Italy  
Japan  
Korea  
Luxembourg

Malaysia  
Mexico  
Morocco  
Netherlands  
New Zealand  
Norway  
Pakistan  
Peru  
Philippines  
Poland  
Portugal  
Romania  
Russia  
Saudi Arabia  
Singapore  
Slovakia  
Slovenia  
South Africa  
Spain  
Sweden  
Switzerland  
Taiwan  
Thailand  
Turkey  
Ukraine  
United Arab Emirates  
United Kingdom  
USA  
Vietnam



[www.weidmuller.com](http://www.weidmuller.com) [www.weidmuller.com](http://www.weidmuller.com)  
**[www.weidmuller.com](http://www.weidmuller.com)**

**W Interconnections, Inc.**

821 Southlake Blvd., Richmond, Virginia 23236

Telephone: (800) 849-9343 Facsimile: (804) 379-2593

Email: [info@weidmuller.com](mailto:info@weidmuller.com) Website: [www.weidmuller.com](http://www.weidmuller.com)

**W Interconnections Canada, Inc.**

10 Spy Court, Markham, Ontario L3R5H6

Telephone: (800) 268-4080 Facsimile: (905) 475-2798

Email: [info1@weidmuller.ca](mailto:info1@weidmuller.ca) Website: [www.weidmuller.ca](http://www.weidmuller.ca)

**W Interconnections, SA de CV**

Ave. Ing. Civiles 204-B Conjunto Ind. Chachapa

Chachapa Puebla

Telephone: 01 222 2866246/47/48 ext. 103 Facsimile: 01 222 2866242

Email: [clientes@weidmuller.com.mx](mailto:clientes@weidmuller.com.mx) Website: [www.weidmuller.com.mx](http://www.weidmuller.com.mx)