

15

1532 02




## Jack connectors



Jack plug according to JEITA RC-5325A JC35P4, 3.5 mm, 4 poles/stereo, straight version, with bend protection and solder terminals

15

1532 02

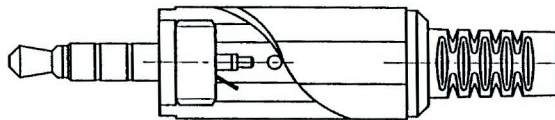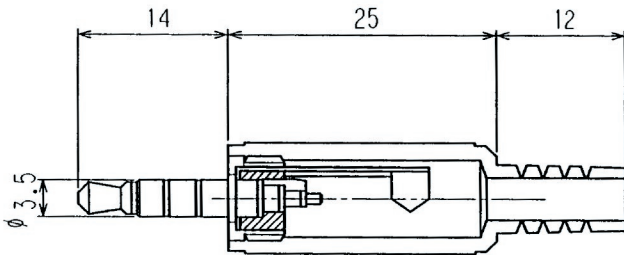

#### Environmental conditions

Temperature range -20 °C/+70 °C

#### Materials

Insulating body	PBT GF
Contact	CuZn/steel, nickel-plated
Insulation	POM
Housing	PE

#### Connectable conductors for solder area

Cable diameter 4 mm

#### Electrical data (at T<sub>amb</sub> 20 °C)

Contact resistance	≤ 50 mΩ
Rated current	1 A
Rated voltage	34 V AC/DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

#### Associated products

Counterparts		
☞ 1502 02	☞ 1503 10	☞ 1503 13
☞ 1503 15	☞ 1503 16	☞ 1503 19
☞ 1503 20	☞ 1503 26	☞ 1503 28

15

1532 02

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
1532 02	4	100	300

**Packaging:**

in bulk, in a cardboard box or a plastic bag