
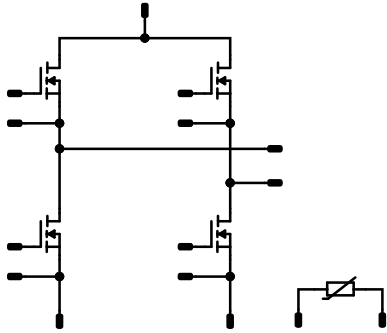




<b>fastPACK E1 SiC</b>		<b>1200 V / 16 mΩ</b>	
<b>Features</b>		<b>flow E1 12 mm housing</b>	
<ul style="list-style-type: none"><li>• Compact and low inductive design</li><li>• High frequency SiC MOSFET</li><li>• Integrated NTC</li></ul>			
<b>Target applications</b>		<b>Schematic</b>	
<ul style="list-style-type: none"><li>• Charging Stations</li><li>• Power Supply</li></ul>			
<b>Types</b>			
<ul style="list-style-type: none"><li>• 10-EZ124PA016ME-LQ18F18T</li></ul>			



Vincotech

## Maximum Ratings

$T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
<b>H-Bridge Switch</b>				
Drain-source voltage	$V_{DS}$		1200	V
Drain current (DC current)	$I_D$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	71	A
Peak drain current	$I_{DM}$	$t_p$ limited by $T_{jmax}$	240	A
Total power dissipation	$P_{tot}$	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	138	W
Gate-source voltage	$V_{GS}$		-4 / 15	V
		dynamic	-8 / 19	
Maximum Junction Temperature	$T_{jmax}$		175	°C

## Module Properties

### Thermal Properties

Storage temperature	$T_{stg}$		-40...+125	°C
Operation temperature under switching condition	$T_{jop}$		-40...+( $T_{jmax} - 25$ )	°C

### Isolation Properties

Isolation voltage	$V_{isol}$	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	$V_{isol}$	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			>12,7	mm
Clearance			8.62	mm
Comparative Tracking Index	CTI		≥ 600	

\*100 % tested in production



Vincotech

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		

### H-Bridge Switch

#### Static

Drain-source on-state resistance	$r_{DS(on)}$		15		80	25 125 150	11,2	19 24 27	20,8 <sup>(1)</sup>	mΩ
Gate-source threshold voltage	$V_{GS(th)}$		0		0,023	25	1,8	2,5	3,6	V
Gate to Source Leakage Current	$I_{GSS}$		15	0		25		20	500	nA
Zero Gate Voltage Drain Current	$I_{DSS}$		0	1200		25		2	38	μA
Internal gate resistance	$r_g$							0,85		Ω
Gate charge	$Q_g$		-4/15	800	80	25		236		nC
Short-circuit input capacitance	$C_{iss}$	$f = 100$ kHz	0	1000	0	25		6714		pF
Short-circuit output capacitance	$C_{oss}$							258		
Reverse transfer capacitance	$C_{rss}$							16		
Diode forward voltage	$V_{SD}$		0		40	25		4,6		V

#### Thermal

Thermal resistance junction to sink <sup>(2)</sup>	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						0,69		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----



Vincotech

10-EZ124PA016ME-LQ18F18T  
datasheet

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GE}$ [V] $V_{GS}$ [V]	$V_{CE}$ [V] $V_{DS}$ [V] $V_F$ [V]	$I_C$ [A] $I_D$ [A] $I_F$ [A]	$T_j$ [°C]	Min	Typ	Max		
<b>Dynamic</b>										
Turn-on delay time	$t_{d(on)}$					25 125 150		25,6 22,09 21,41		ns
Rise time	$t_r$	$R_{gon} = 4 \Omega$ $R_{goff} = 4 \Omega$				25 125 150		24,6 17,55 16,69		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		78,37 90,37 93,73		ns
Fall time	$t_f$				25 125 150		15,63 15,96 15,43		ns	
Turn-on energy (per pulse)	$E_{on}$	$Q_{rFWD}=0,397 \mu C$ $Q_{tFWD}=0,627 \mu C$ $Q_{rFWD}=0,801 \mu C$				25 125 150		1,24 1,11 1,15		mWs
Turn-off energy (per pulse)	$E_{off}$		0/15	600	65	25 125 150		0,521 0,54 0,545		mWs
Peak recovery current	$I_{RRM}$					25 125 150		30,95 37,59 44,44		A
Reverse recovery time	$t_{rr}$					25 125 150		22,14 26,55 28,1		ns
Recovered charge	$Q_r$	$di/dt=2925 A/\mu s$ $di/dt=3363 A/\mu s$ $di/dt=3914 A/\mu s$				25 125 150		0,397 0,627 0,801		$\mu C$
Reverse recovered energy	$E_{rec}$					25 125 150		0,074 0,148 0,203		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		3542,81 4190,14 6670,98		A/ $\mu s$



Vincotech

### Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		$V_{GS}$ [V]	$V_{GE}$ [V]	$V_{DS}$ [V]	$V_{CE}$ [V]	$T_j$ [°C]	Min	Typ	Max	

### Thermistor

#### Static

Rated resistance	$R$					25		5		kΩ
Deviation of $R_{100}$	$A_{R/R}$	$R_{100} = 493 \Omega$				100	-5		5	%
Power dissipation	$P$							245		mW
Power dissipation constant	$d$					25		1,4		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 2 \%$						3375		K
B-value	$B_{(25/100)}$	Tol. $\pm 2 \%$						3437		K
Vincotech Thermistor Reference									K	

<sup>(1)</sup> Value at chip level

<sup>(2)</sup> Only valid with pre-applied Vincotech thermal interface material.




## H-Bridge Switch Characteristics

**figure 1.** MOSFET

Typical output characteristics

$$I_D = f(V_{DS})$$

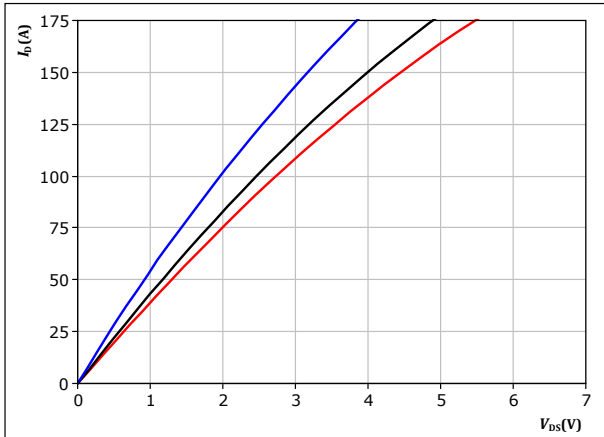


$t_p = 250 \mu s$   
 $V_{GS} = 15 V$   
 $T_j:$  25 °C, 125 °C, 150 °C

**figure 2.** MOSFET

Typical output characteristics

$$I_D = f(V_{DS})$$

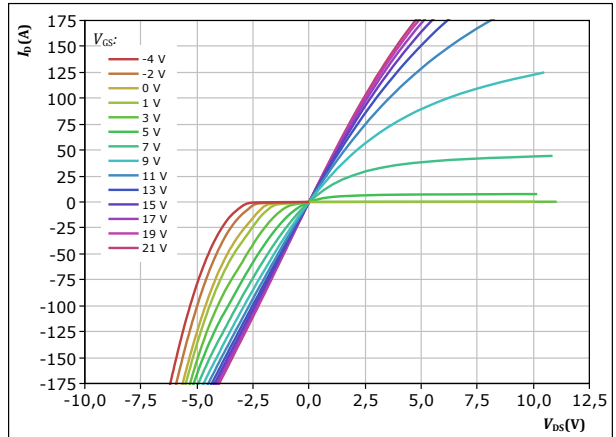


$t_p = 250 \mu s$   
 $T_j = 150 \text{ }^\circ\text{C}$   
 $V_{GS}$  from -4 V to 21 V in steps of 2 V

**figure 3.** MOSFET

Typical transfer characteristics

$$I_D = f(V_{GS})$$

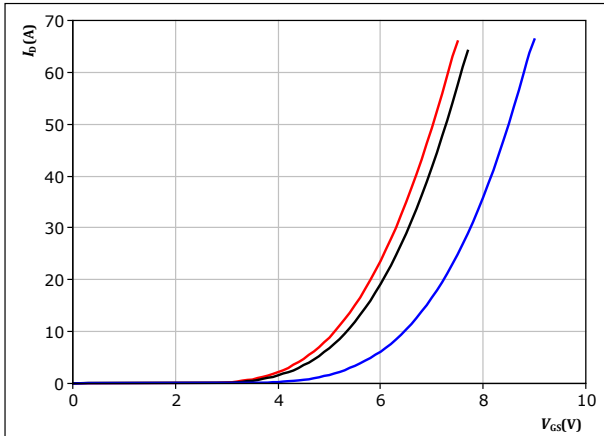


$t_p = 250 \mu s$   
 $V_{DS} = 10 V$   
 $T_j:$  25 °C, 125 °C, 150 °C

**figure 4.** MOSFET

Transient thermal impedance as a function of pulse width

$$Z_{th(j-s)} = f(t_p)$$

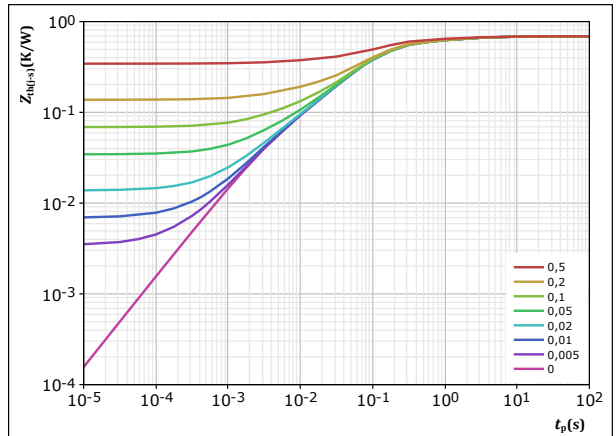

$D = t_p / T$   
 $R_{th(j-s)} = 0,688 \text{ K/W}$   
MOSFET thermal model values  

$R$ (K/W)	$\tau$ (s)
4,41E-02	4,42E+00
9,61E-02	8,00E-01
3,95E-01	1,19E-01
1,14E-01	4,07E-02
3,83E-02	4,09E-03




Vincotech

## H-Bridge Switch Characteristics

figure 5. MOSFET

Safe operating area

$$I_D = f(V_{DS})$$

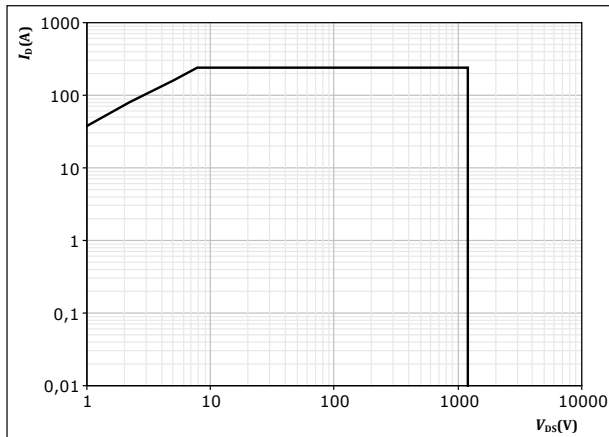

$D =$  single pulse  
 $T_s = 80$  °C  
 $V_{GS} = 15$  V  
 $T_j = T_{jmax}$




## Thermistor Characteristics

figure 6. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

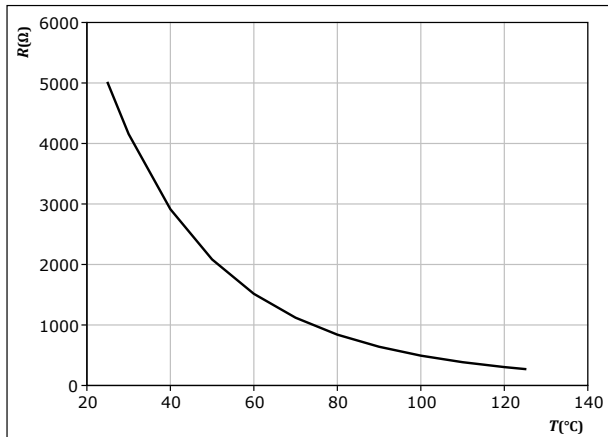






## H-Bridge Switching Characteristics

**figure 7.** MOSFET

Typical switching energy losses as a function of drain current  
 $E = f(I_D)$

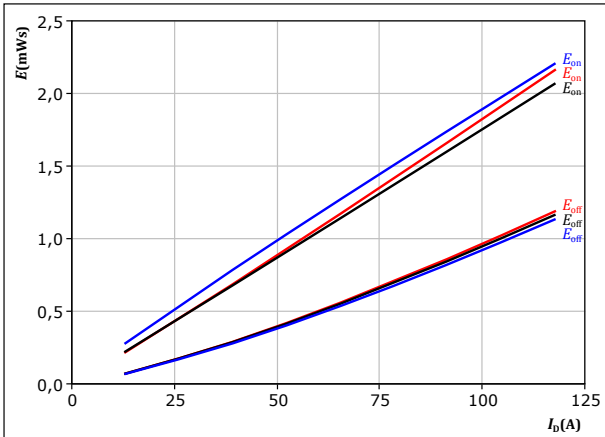


With an inductive load at

$V_{DS} =$	600	V	$T_j:$	25 °C
$V_{GS} =$	0/15	V		125 °C
$R_{gon} =$	4	$\Omega$		150 °C
$R_{goff} =$	4	$\Omega$		

**figure 8.** MOSFET

Typical switching energy losses as a function of gate resistor  
 $E = f(R_g)$

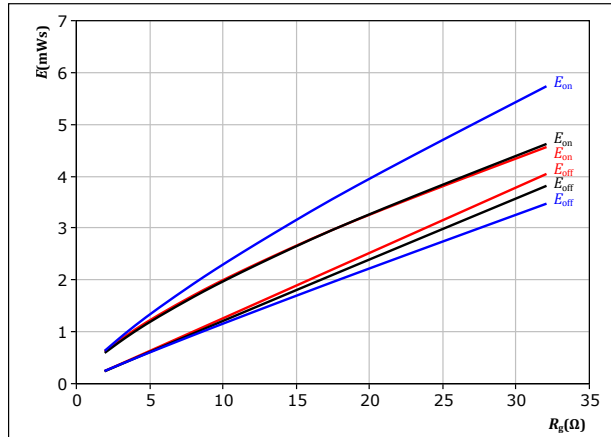


With an inductive load at

$V_{DS} =$	600	V	$T_j:$	25 °C
$V_{GS} =$	0/15	V		125 °C
$I_D =$	65	A		150 °C

**figure 9.** MOSFET

Typical reverse recovered energy loss as a function of drain current  
 $E_{rec} = f(I_D)$

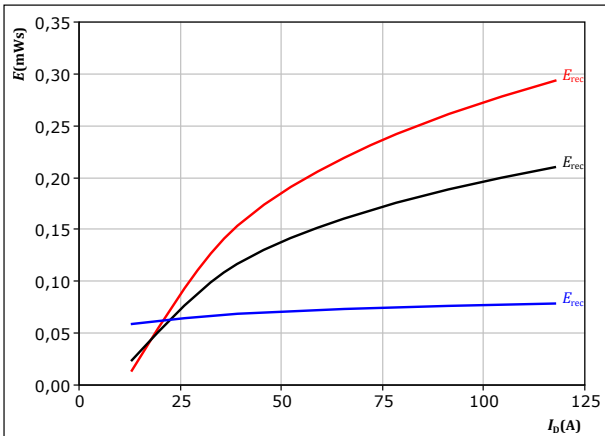


With an inductive load at

$V_{DS} =$	600	V	$T_j:$	25 °C
$V_{GS} =$	0/15	V		125 °C
$R_{gon} =$	4	$\Omega$		150 °C

**figure 10.** MOSFET

Typical reverse recovered energy loss as a function of gate resistor  
 $E_{rec} = f(R_g)$

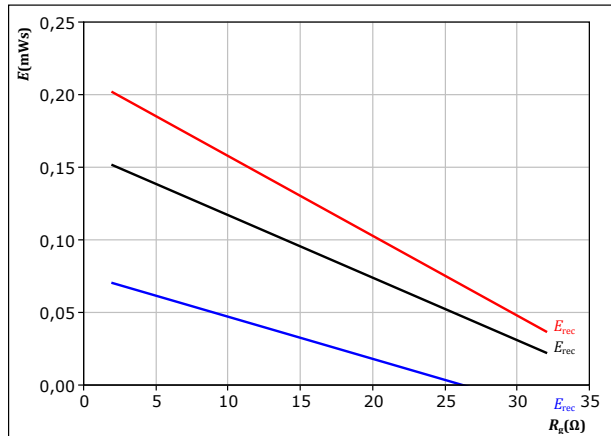

With an inductive load at


$V_{DS} =$	600	V	$T_j:$	25 °C
$V_{GS} =$	0/15	V		125 °C
$I_D =$	65	A		150 °C



## H-Bridge Switching Characteristics

**figure 11.** MOSFET


Typical switching times as a function of drain current  
 $t = f(I_D)$

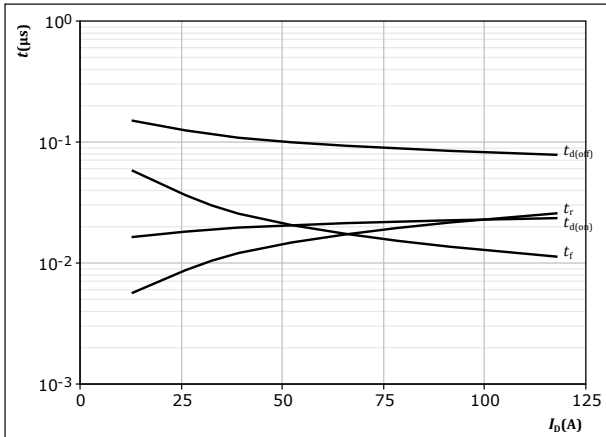

With an inductive load at  
 $T_j = 150 \text{ }^\circ\text{C}$   
 $V_{DS} = 600 \text{ V}$   
 $V_{GS} = 0/15 \text{ V}$   
 $R_{g(on)} = 4 \text{ } \Omega$   
 $R_{g(off)} = 4 \text{ } \Omega$

**figure 12.** MOSFET


Typical switching times as a function of gate resistor  
 $t = f(R_g)$

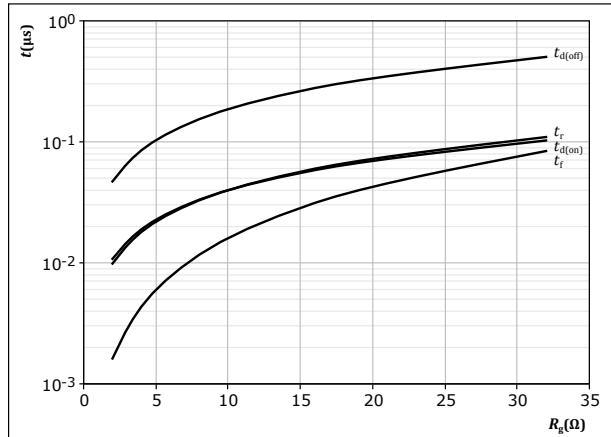

With an inductive load at  
 $T_j = 150 \text{ }^\circ\text{C}$   
 $V_{DS} = 600 \text{ V}$   
 $V_{GS} = 0/15 \text{ V}$   
 $I_D = 65 \text{ A}$

**figure 13.** MOSFET


Typical reverse recovery time as a function of drain current  
 $t_{rr} = f(I_D)$

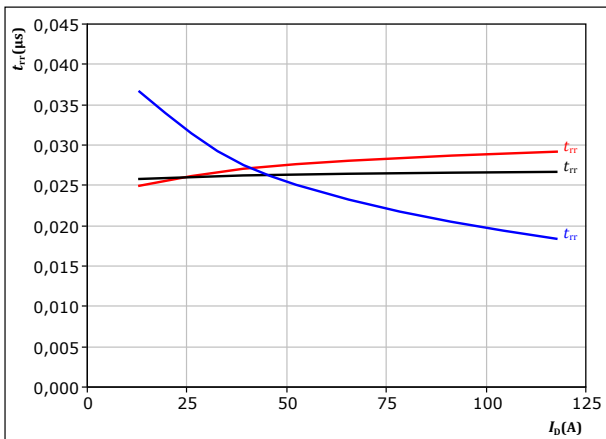

At  $V_{DS} = 600 \text{ V}$   
 $V_{GS} = 0/15 \text{ V}$   
 $R_{g(on)} = 4 \text{ } \Omega$   
 $T_j:$  — 25 °C  
 — 125 °C  
 — 150 °C

**figure 14.** MOSFET

Typical reverse recovery time as a function of turn off gate resistor  
 $t_{rr} = f(R_{g(off)})$

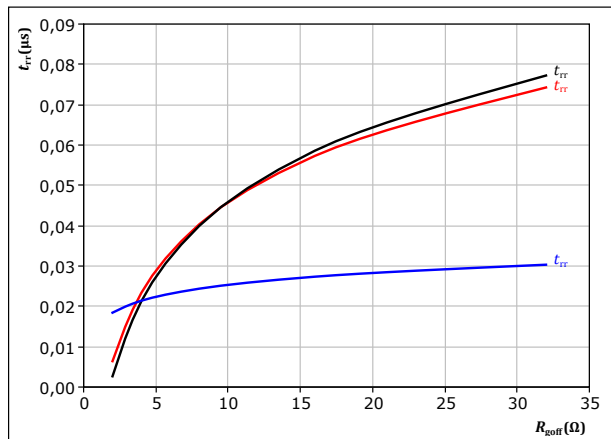

At  $V_{DS} = 600 \text{ V}$   
 $V_{GS} = 0/15 \text{ V}$   
 $I_D = 65 \text{ A}$   
 $T_j:$  — 25 °C  
 — 125 °C  
 — 150 °C




## H-Bridge Switching Characteristics

**figure 15.** MOSFET

Typical recovered charge as a function of drain current

$$Q_r = f(I_D)$$

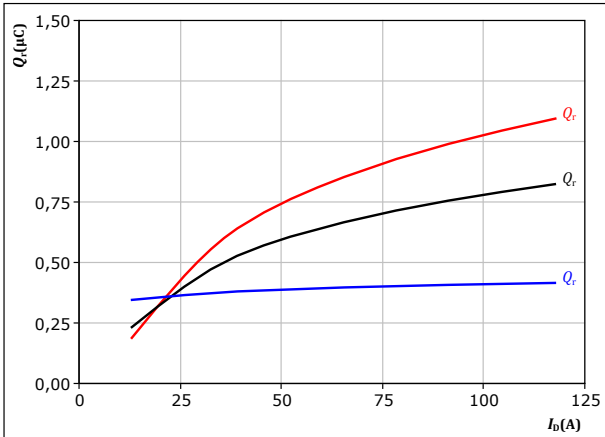


At  $V_{DS} = 600$  V  
 $V_{GS} = 0/15$  V  
 $R_{goff} = 4$   $\Omega$

$T_j$ : — 25 °C  
 — 125 °C  
 — 150 °C

**figure 16.** MOSFET

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

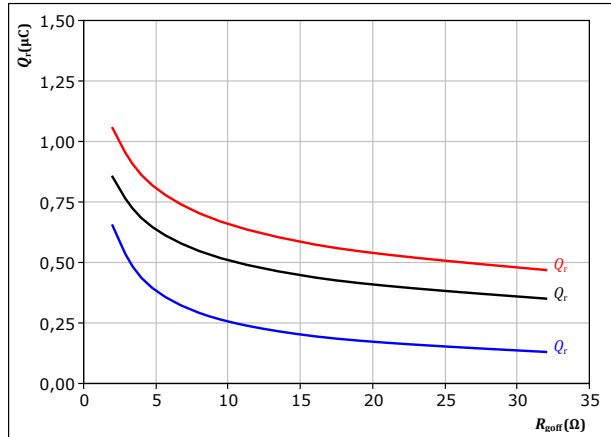


At  $V_{DS} = 600$  V  
 $V_{GS} = 0/15$  V  
 $I_D = 65$  A

$T_j$ : — 25 °C  
 — 125 °C  
 — 150 °C

**figure 17.** MOSFET

Typical peak reverse recovery current as a function of drain current

$$I_{RM} = f(I_D)$$

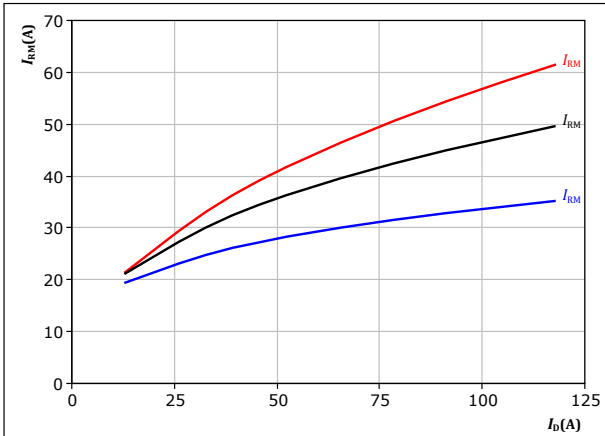


At  $V_{DS} = 600$  V  
 $V_{GS} = 0/15$  V  
 $R_{goff} = 4$   $\Omega$

$T_j$ : — 25 °C  
 — 125 °C  
 — 150 °C

**figure 18.** MOSFET

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

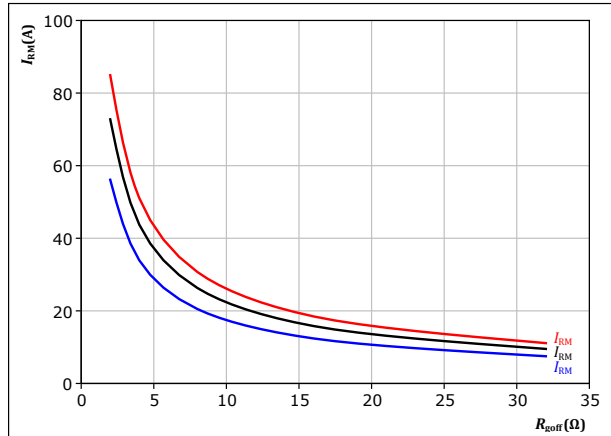

At  $V_{DS} = 600$  V  
 $V_{GS} = 0/15$  V  
 $I_D = 65$  A


$T_j$ : — 25 °C  
 — 125 °C  
 — 150 °C



## H-Bridge Switching Characteristics

**figure 19.** MOSFET

Typical rate of fall of forward and reverse recovery current as a function of drain current  
 $di_f/dt, di_r/dt = f(I_D)$

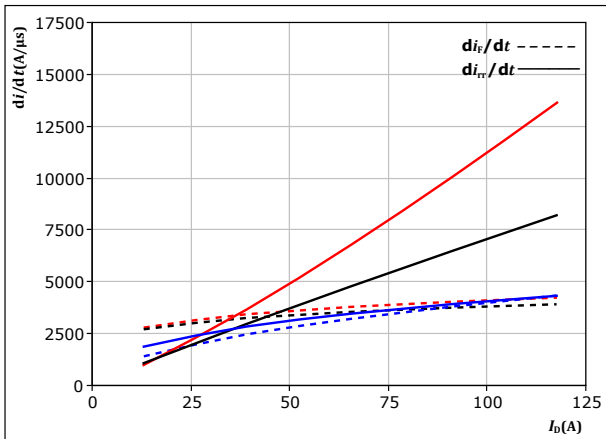


At  $V_{DS} = 600$  V  
 $V_{GS} = 0/15$  V  
 $R_{goff} = 4$   $\Omega$

$T_j$ : 25 °C  
 125 °C  
 150 °C

**figure 20.** MOSFET

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor  
 $di_f/dt, di_r/dt = f(R_{goff})$

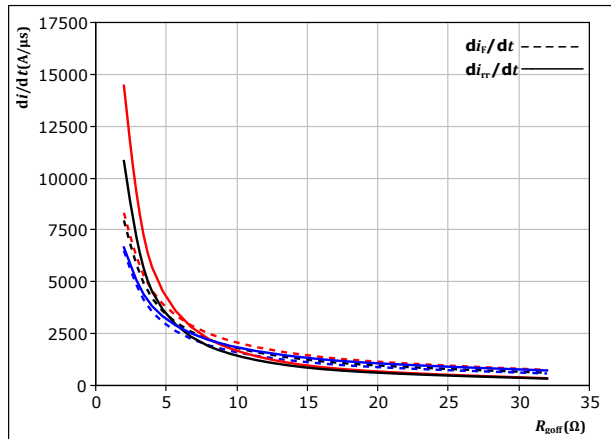


At  $V_{DS} = 600$  V  
 $V_{GS} = 0/15$  V  
 $I_D = 65$  A

$T_j$ : 25 °C  
 125 °C  
 150 °C

**figure 21.** MOSFET

Reverse bias safe operating area

$I_D = f(V_{DS})$

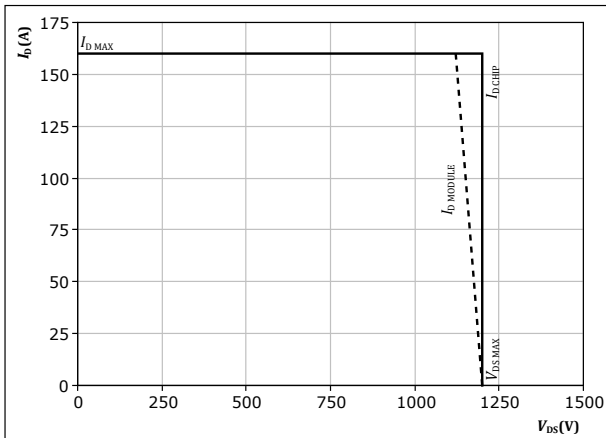


At  $T_j = 150$  °C  
 $R_{goff} = 4$   $\Omega$   
 $R_{goff} = 4$   $\Omega$



## H-Bridge Switching Definitions


**figure 22.** MOSFET

Turn-off Switching Waveforms & definition of  $t_{doff}$ ,  $t_{Eoff}$  ( $t_{Eoff}$  = integrating time for  $E_{off}$ )

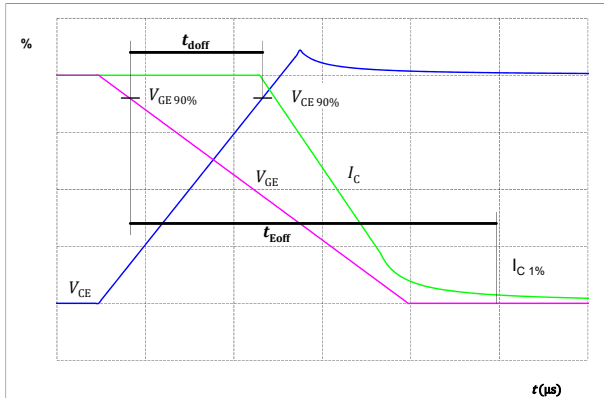


**figure 23.** MOSFET

Turn-on Switching Waveforms & definition of  $t_{don}$ ,  $t_{Eon}$  ( $t_{Eon}$  = integrating time for  $E_{on}$ )

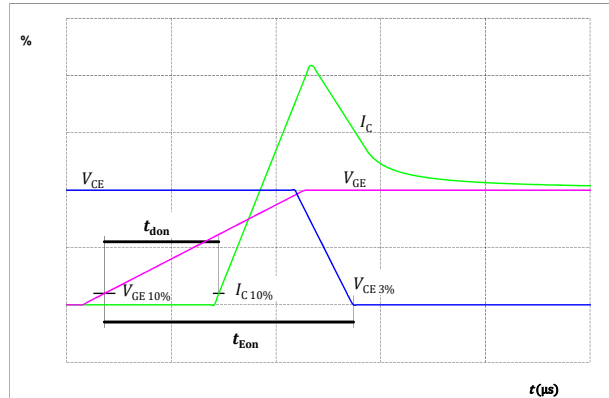


**figure 24.** MOSFET

Turn-off Switching Waveforms & definition of  $t_f$

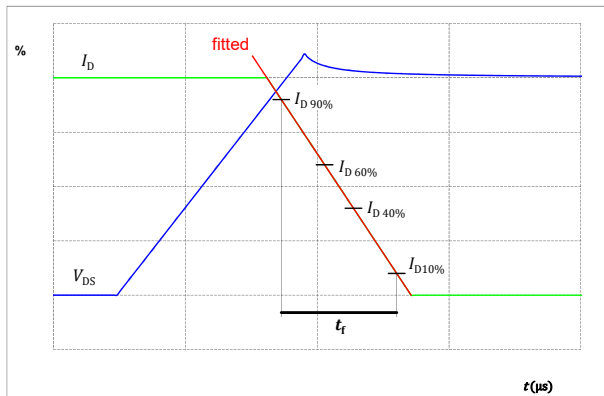

**figure 25.** MOSFET

Turn-on Switching Waveforms & definition of  $t_r$

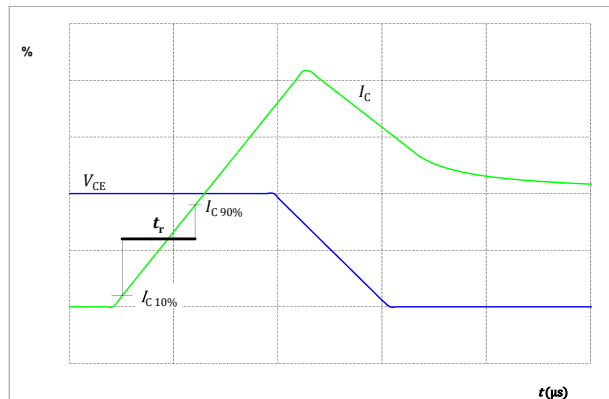



## H-Bridge Switching Definitions

figure 26. FWD

Turn-off Switching Waveforms & definition of  $t_{tr}$

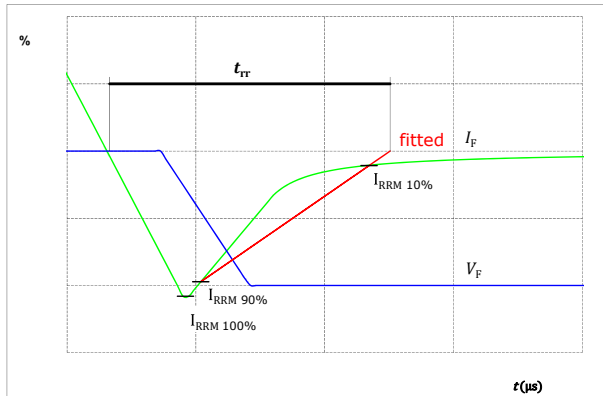


figure 27. FWD

Turn-on Switching Waveforms & definition of  $t_{Qr}$  ( $t_{Qr}$  = integrating time for  $Q_r$ )


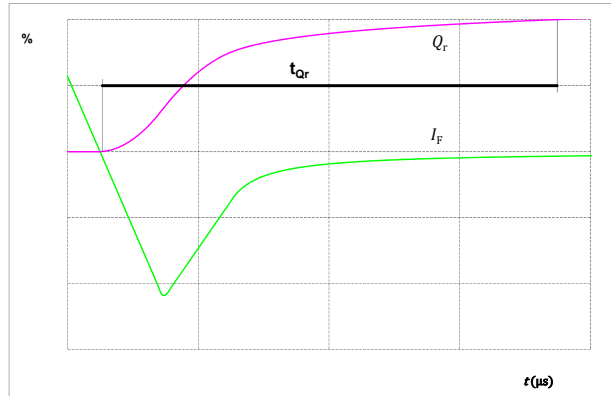


figure 28. FWD


Turn-on Switching Waveforms & definition of  $t_{Erec}$  ( $t_{Erec}$  = integrating time for  $E_{rec}$ )





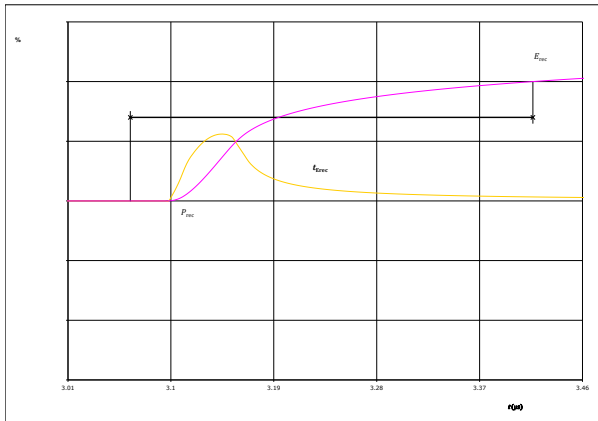

Vincotech

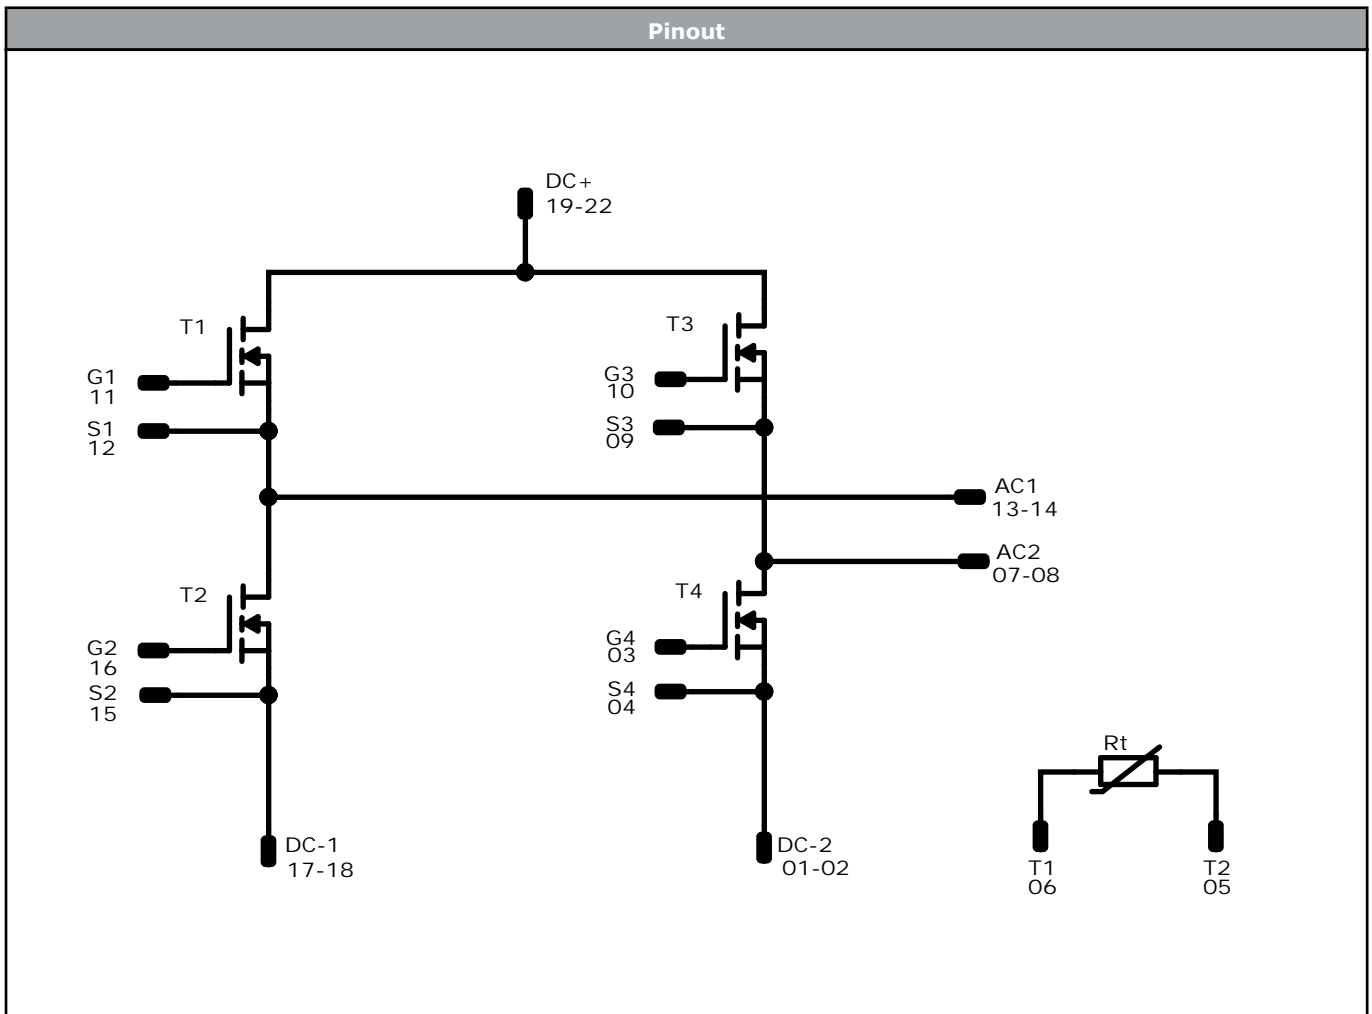

Identification					
ID	Component	Voltage	Current	Function	Comment
T2, T1, T4, T3	MOSFET	1200 V	16 mΩ	H-Bridge Switch	
Rt	Thermistor			Thermistor	






Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow</i> E1 packages see vincotech.com website.

Package data
Package data for <i>flow</i> E1 packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
10-EZ124PA016ME-LQ18F18T-D1-14	4 Nov. 2021	Initial Release	

**DISCLAIMER**

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

**LIFE SUPPORT POLICY**

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.