



flowPACK 1 SiC

900 V / 35 mΩ

Features

- Wolfspeed(Cree)TM Silicon Carbide Power MOSFET,
- C3MTM MOSFET Technology
- Sixpack with three separated legs
- Solderless Press-fit Mounting Technology


Target applications

- Power Supply


Types

- 10-PY096PA035ME-L224F18Y

flow 1 12 mm housing



Schematic

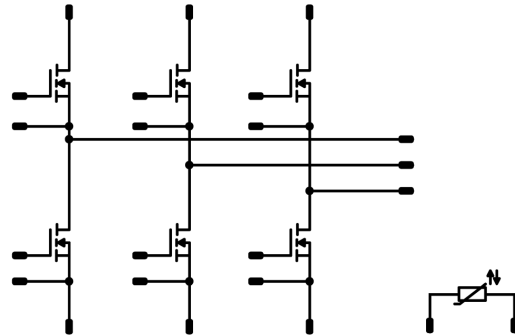



Vincotech

10-PY096PA035ME-L224F18Y
datasheet

Maximum Ratings

$T_j = 25\text{ °C}$, unless otherwise specified

Parameter	Symbol	Conditions	Value	Unit
Inverter Switch				
Drain-source voltage	V_{DS}		900	V
Drain current (DC current)	I_D	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	41	A
Peak drain current	I_{DM}	t_p limited by T_{jmax}	180	A
Total power dissipation	P_{tot}	$T_j = T_{jmax}$ $T_s = 80\text{ °C}$	76	W
Gate-source voltage	V_{GS}		-4 / 15	V
		dynamic	-8 / 19	
Maximum Junction Temperature	T_{jmax}		175	°C

Module Properties

Thermal Properties

Storage temperature	T_{stg}		-40...+125	°C
Operation temperature under switching condition	T_{jop}		-40...+($T_{jmax} - 25$)	°C

Isolation Properties

Isolation voltage	V_{isol}	DC Test Voltage* $t_p = 2\text{ s}$	6000	V
Isolation voltage	V_{isol}	AC Voltage $t_p = 1\text{ min}$	2500	V
Creepage distance			>12,7	mm
Clearance			11,83	mm
Comparative Tracking Index	CTI		≥ 200	

*100 % tested in production



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		

Inverter Switch

Static

Drain-source on-state resistance	$r_{DS(on)}$		15		40	25 125 150		32 39 43	39 ⁽¹⁾	mΩ
Gate-source threshold voltage	$V_{GS(th)}$		0		0,01	25	1,7	2,4	3,5	V
Gate to Source Leakage Current	I_{GSS}		15	0		25		20	500	nA
Zero Gate Voltage Drain Current	I_{DSS}		0	900		25		2	200	μA
Internal gate resistance	r_g							2,35		Ω
Gate charge	Q_g							60,8		nC
Gate to source charge	Q_{GS}		-4/15	400	40	25		15		
Gate to drain charge	Q_{GD}							24		
Short-circuit input capacitance	C_{iss}							1320		pF
Short-circuit output capacitance	C_{oss}	$f = 1$ Mhz	0	600	0	25		120		
Reverse transfer capacitance	C_{rss}							8		
Diode forward voltage	V_{SD}		0		0	25		4,8		V

Thermal

Thermal resistance junction to sink ⁽²⁾	$R_{th(j-s)}$	$\lambda_{paste} = 3,4$ W/mK (PSX)						1,25		K/W
--	---------------	---------------------------------------	--	--	--	--	--	------	--	-----



Vincotech

10-PY096PA035ME-L224F18Y
datasheet

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GE} [V] V_{GS} [V]	V_{CE} [V] V_{DS} [V] V_F [V]	I_C [A] I_D [A] I_F [A]	T_j [°C]	Min	Typ	Max		
Dynamic										
Turn-on delay time	$t_{d(on)}$					25 125 150		12,8 12,8 13,6		ns
Rise time	t_r	$R_{gon} = 4 \Omega$ $R_{goff} = 4 \Omega$				25 125 150		5,4 5 5		ns
Turn-off delay time	$t_{d(off)}$					25 125 150		42,6 42,8 43,4		ns
Fall time	t_f				25 125 150		10,9 11,7 10,8		ns	
Turn-on energy (per pulse)	E_{on}	$Q_{rFWD}=0,455 \mu C$ $Q_{tFWD}=0,875 \mu C$ $Q_{rFWD}=0,825 \mu C$				25 125 150		0,459 0,447 0,471		mWs
Turn-off energy (per pulse)	E_{off}		-5/15	600	40	25 125 150		0,082 0,055 0,048		mWs
Peak recovery current	I_{RRM}					25 125 150		53,52 58,36 62,77		A
Reverse recovery time	t_{rr}					25 125 150		14,5 14,6 15,4		ns
Recovered charge	Q_r	$di/dt=7340 A/\mu s$ $di/dt=7860 A/\mu s$ $di/dt=8440 A/\mu s$				25 125 150		0,455 0,875 0,825		μC
Reverse recovered energy	E_{rec}					25 125 150		0,028 0,196 0,106		mWs
Peak rate of fall of recovery current	$(di_{rr}/dt)_{max}$					25 125 150		11000 13700 15900		A/ μs



Vincotech

Characteristic Values

Parameter	Symbol	Conditions					Values			Unit
		V_{GS} [V]	V_{GE} [V]	V_{DS} [V]	V_{CE} [V]	T_j [°C]	Min	Typ	Max	

Thermistor

Static

Rated resistance	R					25		22		kΩ
Deviation of R_{100}	$A_{R/R}$	$R_{100} = 1484 \Omega$				100	-5		5	%
Power dissipation	P					25		130		mW
Power dissipation constant	d					25		1,5		mW/K
B-value	$B_{(25/50)}$	Tol. $\pm 1 \%$						3962		K
B-value	$B_{(25/100)}$	Tol. $\pm 1 \%$						4000		K
Vincotech Thermistor Reference									I	

⁽¹⁾ Value at chip level

⁽²⁾ Only valid with pre-applied Vincotech thermal interface material.



Inverter Switch Characteristics

figure 1. MOSFET

Typical output characteristics
 $I_D = f(V_{DS})$

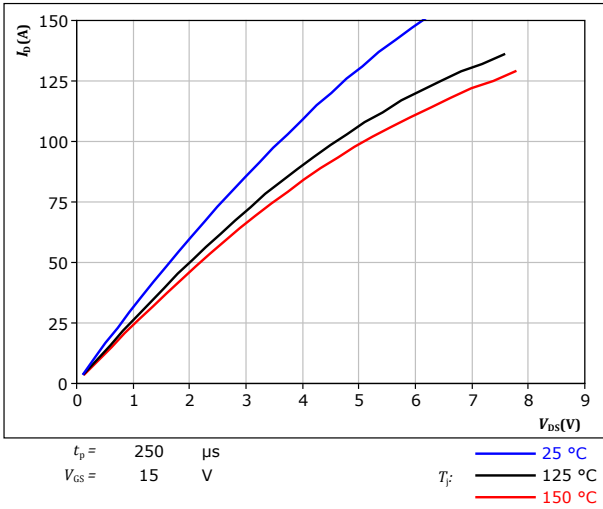


figure 2. MOSFET

Typical output characteristics
 $I_D = f(V_{DS})$

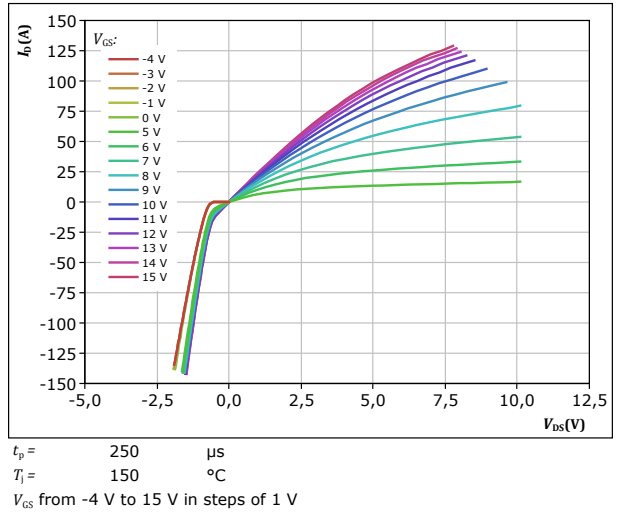


figure 3. MOSFET

Typical transfer characteristics
 $I_D = f(V_{GS})$


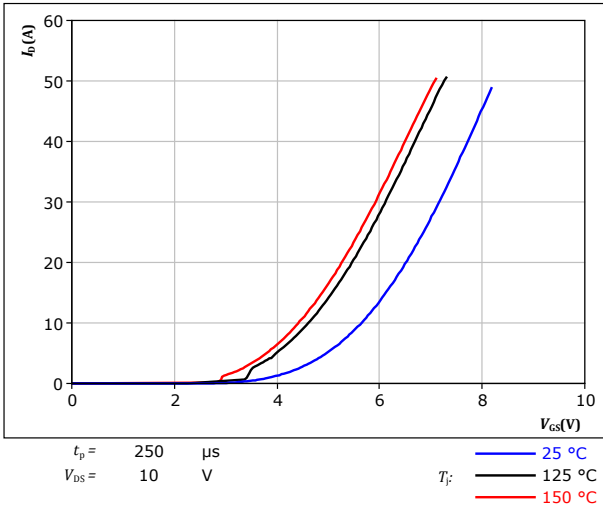


figure 4. MOSFET

Transient thermal impedance as a function of pulse width
 $Z_{th(j-s)} = f(t_p)$

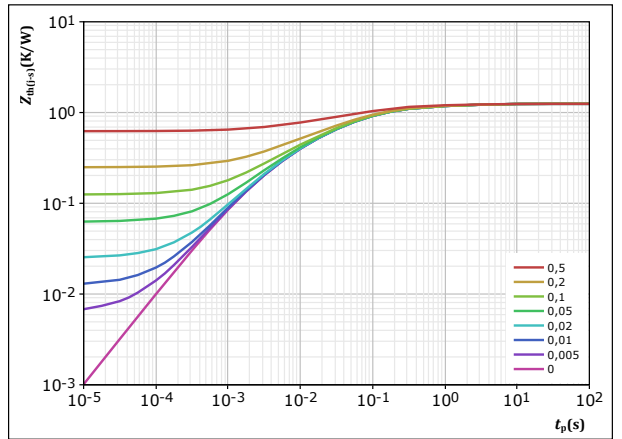

MOSFET thermal model values


R (K/W)	τ (s)
6,45E-02	3,56E+00
1,36E-01	5,08E-01
4,22E-01	9,62E-02
3,45E-01	2,46E-02
2,11E-01	5,94E-03
6,79E-02	1,44E-03



Inverter Switch Characteristics

figure 5. MOSFET


Safe operating area
 $I_D = f(V_{DS})$

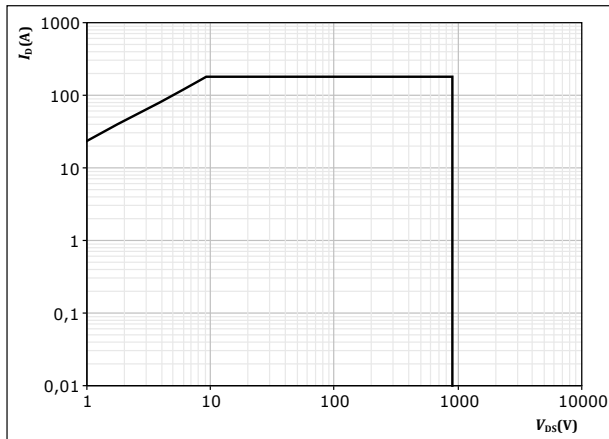

$D =$ single pulse
 $T_s = 80$ °C
 $V_{GS} = 15$ V
 $T_j = T_{jmax}$

figure 6. MOSFET

Gate voltage vs gate charge
 $V_{GS} = f(Q_g)$

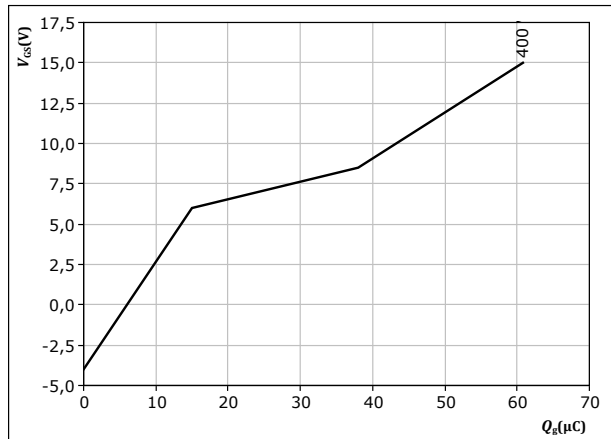

$I_D = 20$ A
 $T_j = 25$ °C




Thermistor Characteristics

figure 7. Thermistor

Typical NTC characteristic as function of temperature

$$R_T = f(T)$$

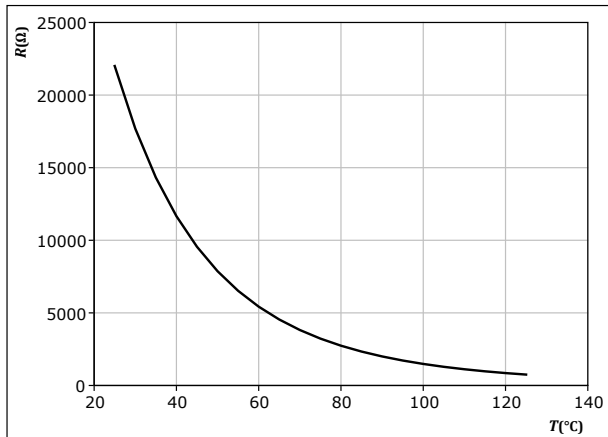




Inverter Switching Characteristics

figure 8. MOSFET

Typical switching energy losses as a function of drain current
 $E = f(I_D)$

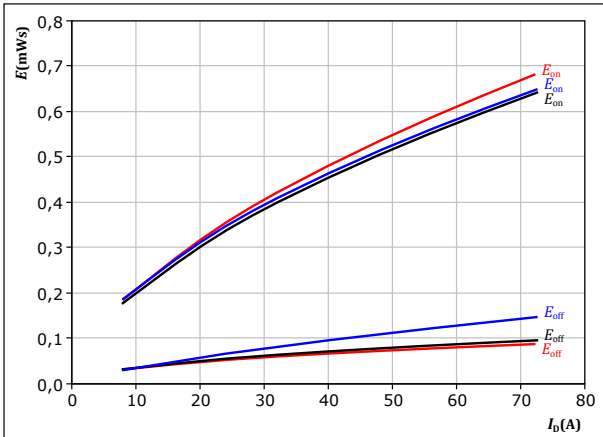


With an inductive load at

$V_{DS} =$	600	V	$T_j:$	— 25 °C
$V_{GS} =$	-5/15	V		— 125 °C
$R_{gon} =$	4	Ω		— 150 °C
$R_{goff} =$	4	Ω		

figure 9. MOSFET

Typical switching energy losses as a function of gate resistor
 $E = f(R_g)$

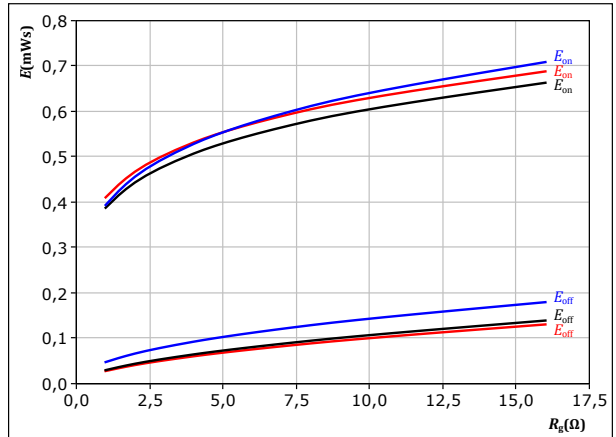


With an inductive load at

$V_{DS} =$	600	V	$T_j:$	— 25 °C
$V_{GS} =$	-5/15	V		— 125 °C
$I_D =$	40	A		— 150 °C

figure 10. MOSFET

Typical reverse recovered energy loss as a function of drain current
 $E_{rec} = f(I_D)$

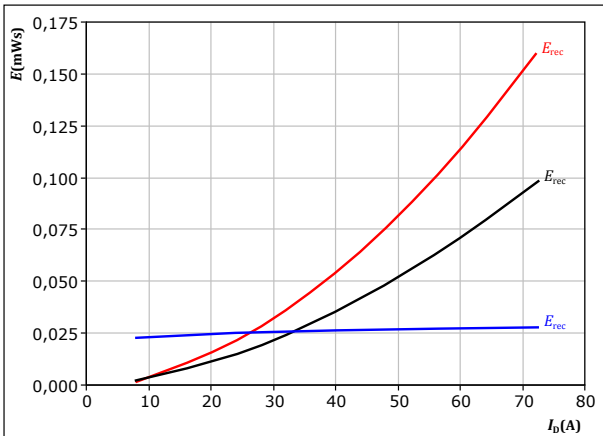


With an inductive load at

$V_{DS} =$	600	V	$T_j:$	— 25 °C
$V_{GS} =$	-5/15	V		— 125 °C
$R_{gon} =$	4	Ω		— 150 °C

figure 11. MOSFET

Typical reverse recovered energy loss as a function of gate resistor
 $E_{rec} = f(R_g)$

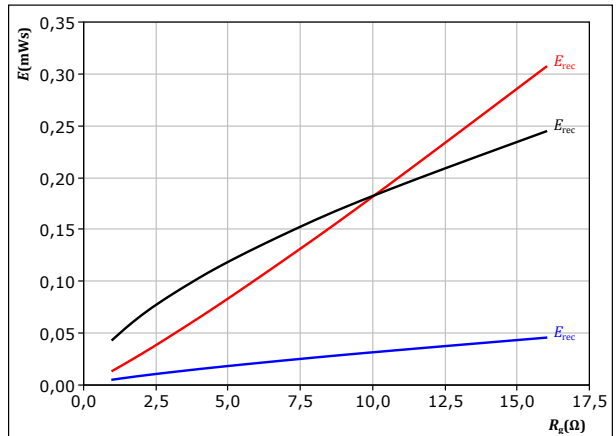

With an inductive load at


$V_{DS} =$	600	V	$T_j:$	— 25 °C
$V_{GS} =$	-5/15	V		— 125 °C
$I_D =$	40	A		— 150 °C



Inverter Switching Characteristics

figure 12. MOSFET


Typical switching times as a function of drain current
 $t = f(I_D)$

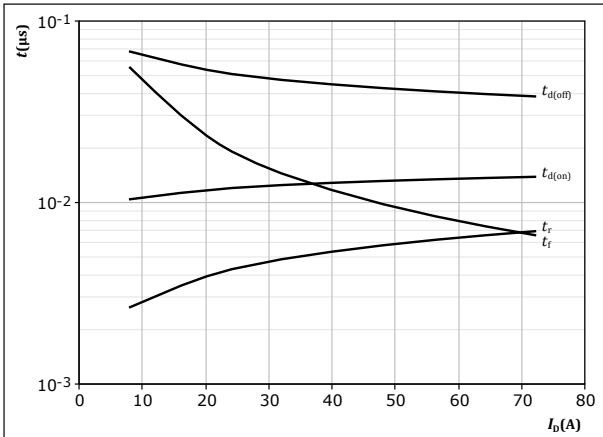

With an inductive load at
 $T_j = 150 \text{ }^\circ\text{C}$
 $V_{DS} = 600 \text{ V}$
 $V_{GS} = -5/15 \text{ V}$
 $R_{g(on)} = 4 \text{ } \Omega$
 $R_{g(off)} = 4 \text{ } \Omega$

figure 13. MOSFET


Typical switching times as a function of gate resistor
 $t = f(R_g)$

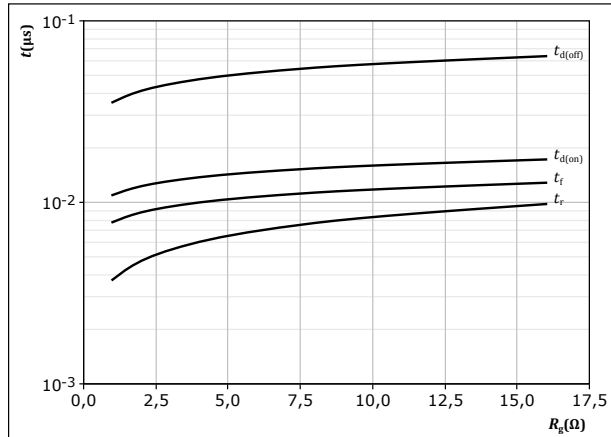

With an inductive load at
 $T_j = 150 \text{ }^\circ\text{C}$
 $V_{DS} = 600 \text{ V}$
 $V_{GS} = -5/15 \text{ V}$
 $I_D = 40 \text{ A}$

figure 14. MOSFET


Typical reverse recovery time as a function of drain current
 $t_{rr} = f(I_D)$

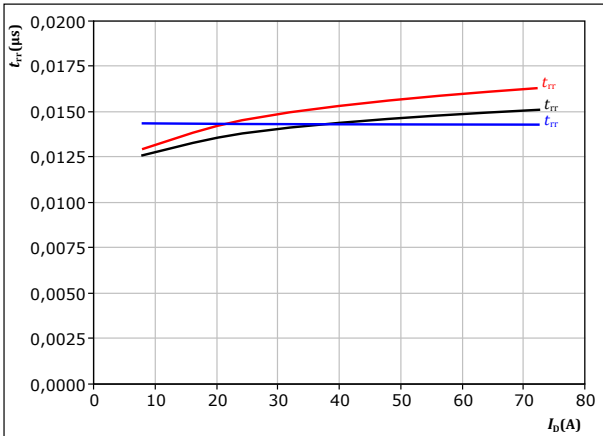

At $V_{DS} = 600 \text{ V}$
 $V_{GS} = -5/15 \text{ V}$
 $R_{g(on)} = 4 \text{ } \Omega$
 $T_j: 25 \text{ }^\circ\text{C}$
 $125 \text{ }^\circ\text{C}$
 $150 \text{ }^\circ\text{C}$

figure 15. MOSFET

Typical reverse recovery time as a function of turn off gate resistor
 $t_{rr} = f(R_{g(off)})$

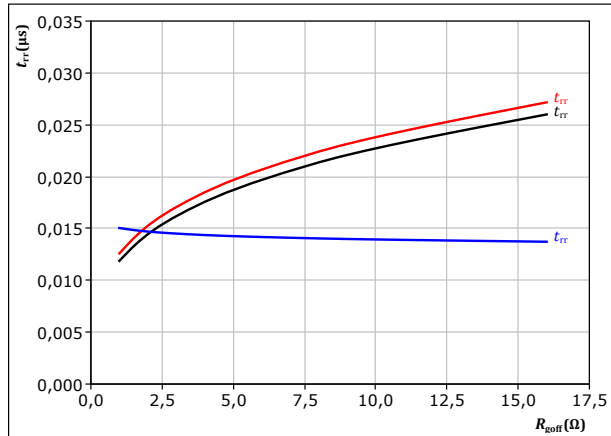

At $V_{DS} = 600 \text{ V}$
 $V_{GS} = -5/15 \text{ V}$
 $I_D = 40 \text{ A}$
 $T_j: 25 \text{ }^\circ\text{C}$
 $125 \text{ }^\circ\text{C}$
 $150 \text{ }^\circ\text{C}$




Inverter Switching Characteristics

figure 16. MOSFET

Typical recovered charge as a function of drain current

$$Q_r = f(I_D)$$

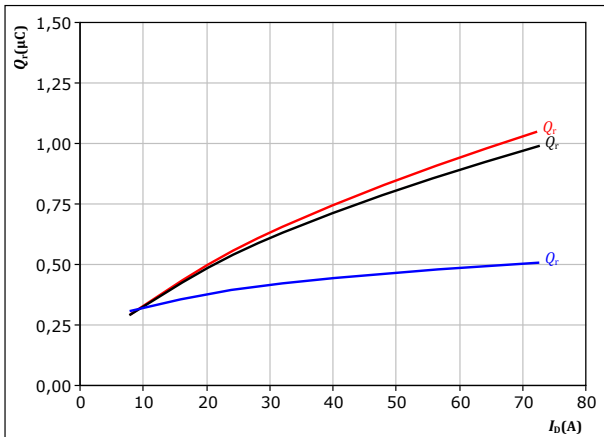


At $V_{DS} = 600$ V
 $V_{GS} = -5/15$ V
 $R_{goff} = 4$ Ω

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 17. MOSFET

Typical recovered charge as a function of turn off gate resistor

$$Q_r = f(R_{goff})$$

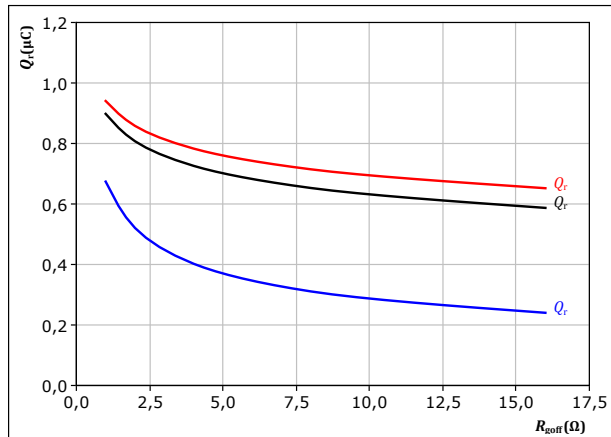


At $V_{DS} = 600$ V
 $V_{GS} = -5/15$ V
 $I_D = 40$ A

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 18. MOSFET

Typical peak reverse recovery current as a function of drain current

$$I_{RM} = f(I_D)$$

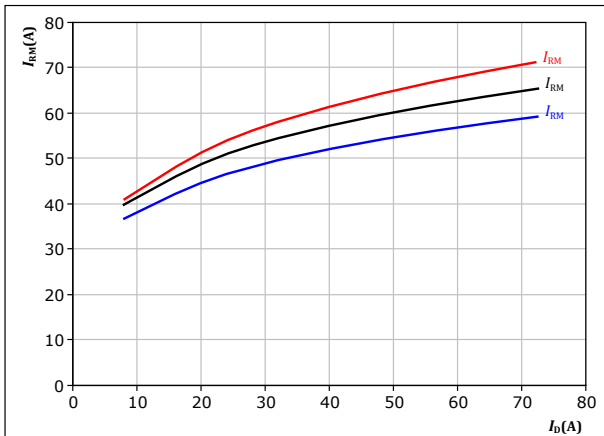


At $V_{DS} = 600$ V
 $V_{GS} = -5/15$ V
 $R_{goff} = 4$ Ω

T_j : — 25 °C
 — 125 °C
 — 150 °C

figure 19. MOSFET

Typical peak reverse recovery current as a function of turn off gate resistor

$$I_{RM} = f(R_{goff})$$

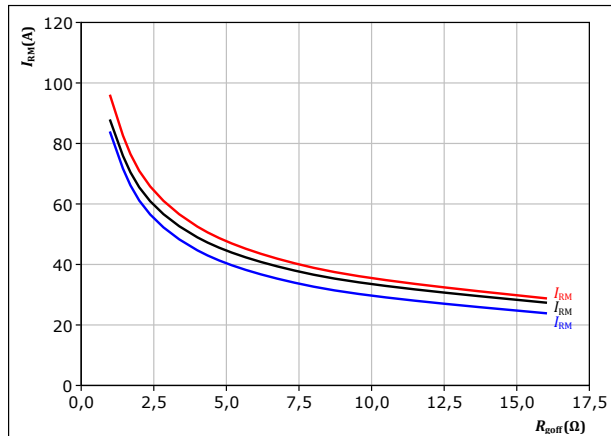

At $V_{DS} = 600$ V
 $V_{GS} = -5/15$ V
 $I_D = 40$ A


T_j : — 25 °C
 — 125 °C
 — 150 °C



Inverter Switching Characteristics

figure 20. MOSFET

Typical rate of fall of forward and reverse recovery current as a function of drain current
 $di_f/dt, di_{rr}/dt = f(I_D)$

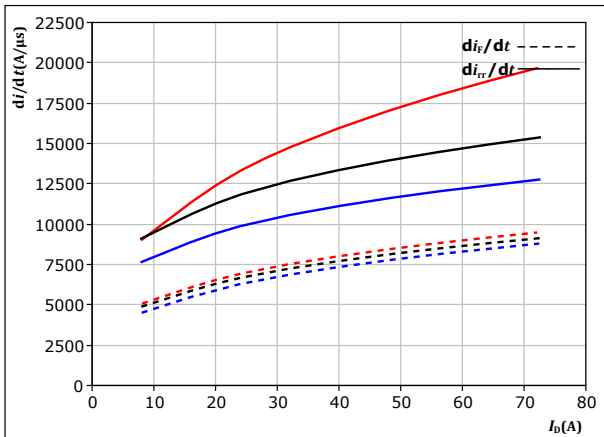


At $V_{DS} = 600$ V
 $V_{GS} = -5/15$ V
 $R_{g(on)} = 4$ Ω

$T_j = 25$ °C
 $T_j = 125$ °C
 $T_j = 150$ °C

figure 21. MOSFET

Typical rate of fall of forward and reverse recovery current as a function of turn off gate resistor
 $di_f/dt, di_{rr}/dt = f(R_{g(off)})$

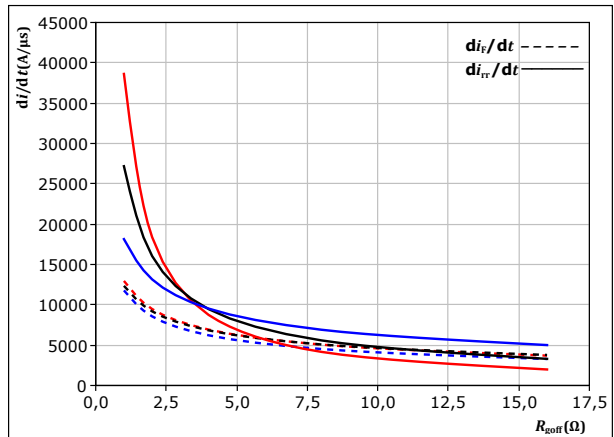


At $V_{DS} = 600$ V
 $V_{GS} = -5/15$ V
 $I_D = 40$ A

$T_j = 25$ °C
 $T_j = 125$ °C
 $T_j = 150$ °C

figure 22. MOSFET

Reverse bias safe operating area
 $I_D = f(V_{DS})$

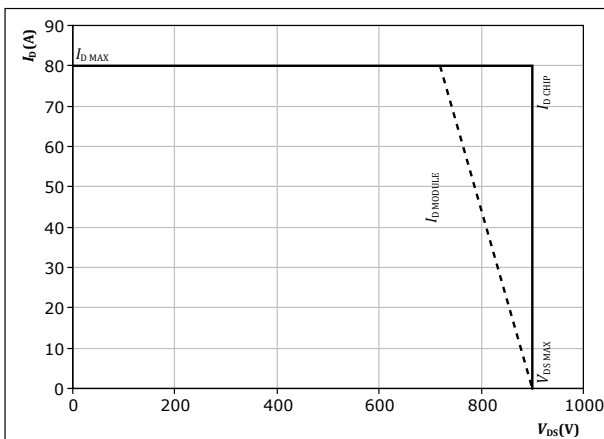

At $T_j = 150$ °C
 $R_{g(on)} = 4$ Ω
 $R_{g(off)} = 4$ Ω



Inverter Switching Definitions

figure 23. MOSFET

Turn-off Switching Waveforms & definition of t_{doff} , t_{Eoff} (t_{Eoff} = integrating time for E_{off})

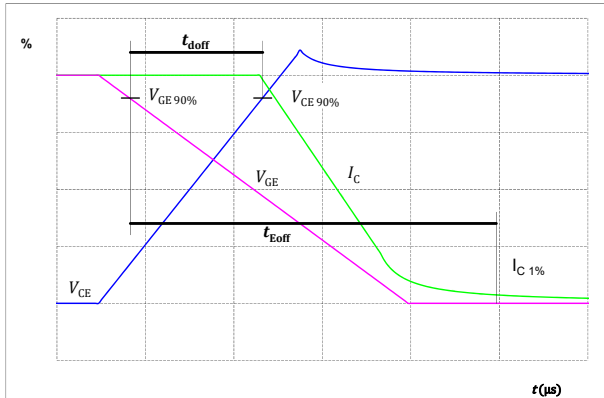


figure 24. MOSFET

Turn-on Switching Waveforms & definition of t_{don} , t_{Eon} (t_{Eon} = integrating time for E_{on})

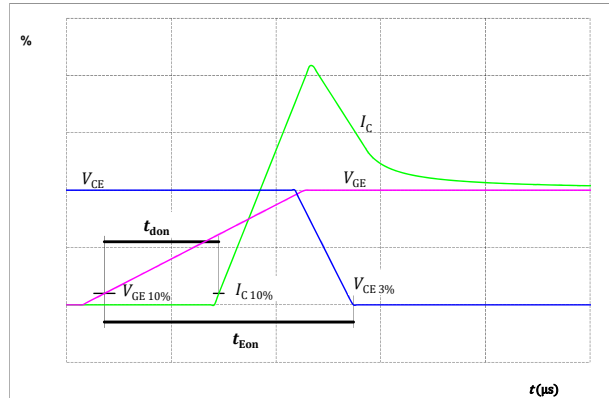


figure 25. MOSFET

Turn-off Switching Waveforms & definition of t_f


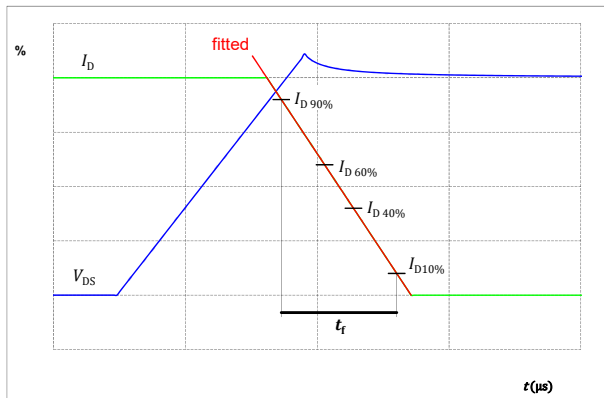


figure 26. MOSFET

Turn-on Switching Waveforms & definition of t_r



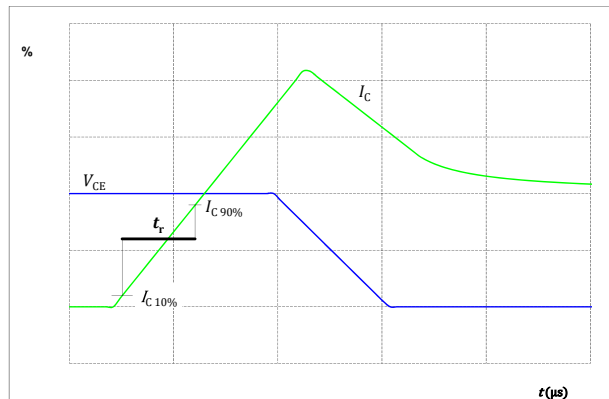

Inverter Switching Definitions

figure 27. FWD

Turn-off Switching Waveforms & definition of t_{tr}

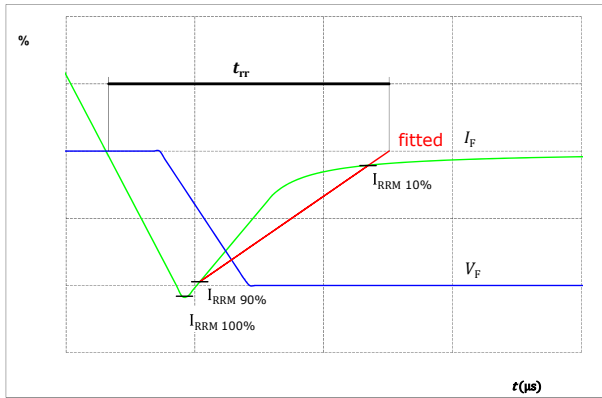


figure 28. FWD

Turn-on Switching Waveforms & definition of t_{Qr} (t_{Qr} = integrating time for Q_r)


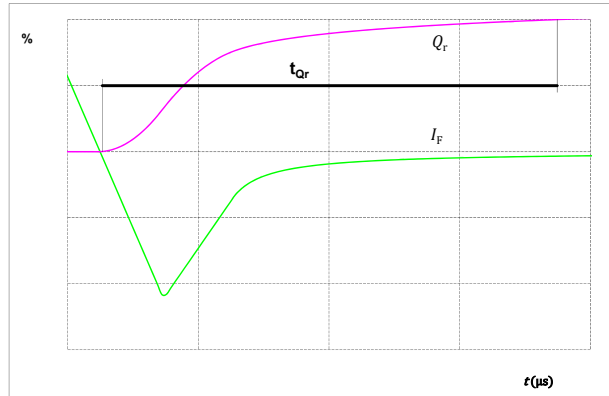



figure 29. FWD

Turn-on Switching Waveforms & definition of t_{Erec} (t_{Erec} = integrating time for E_{rec})



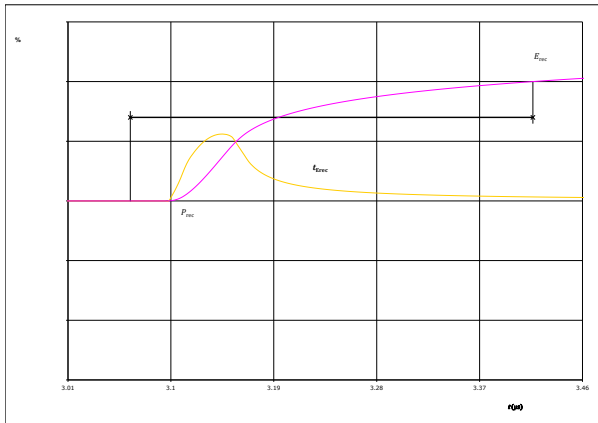

Vincotech

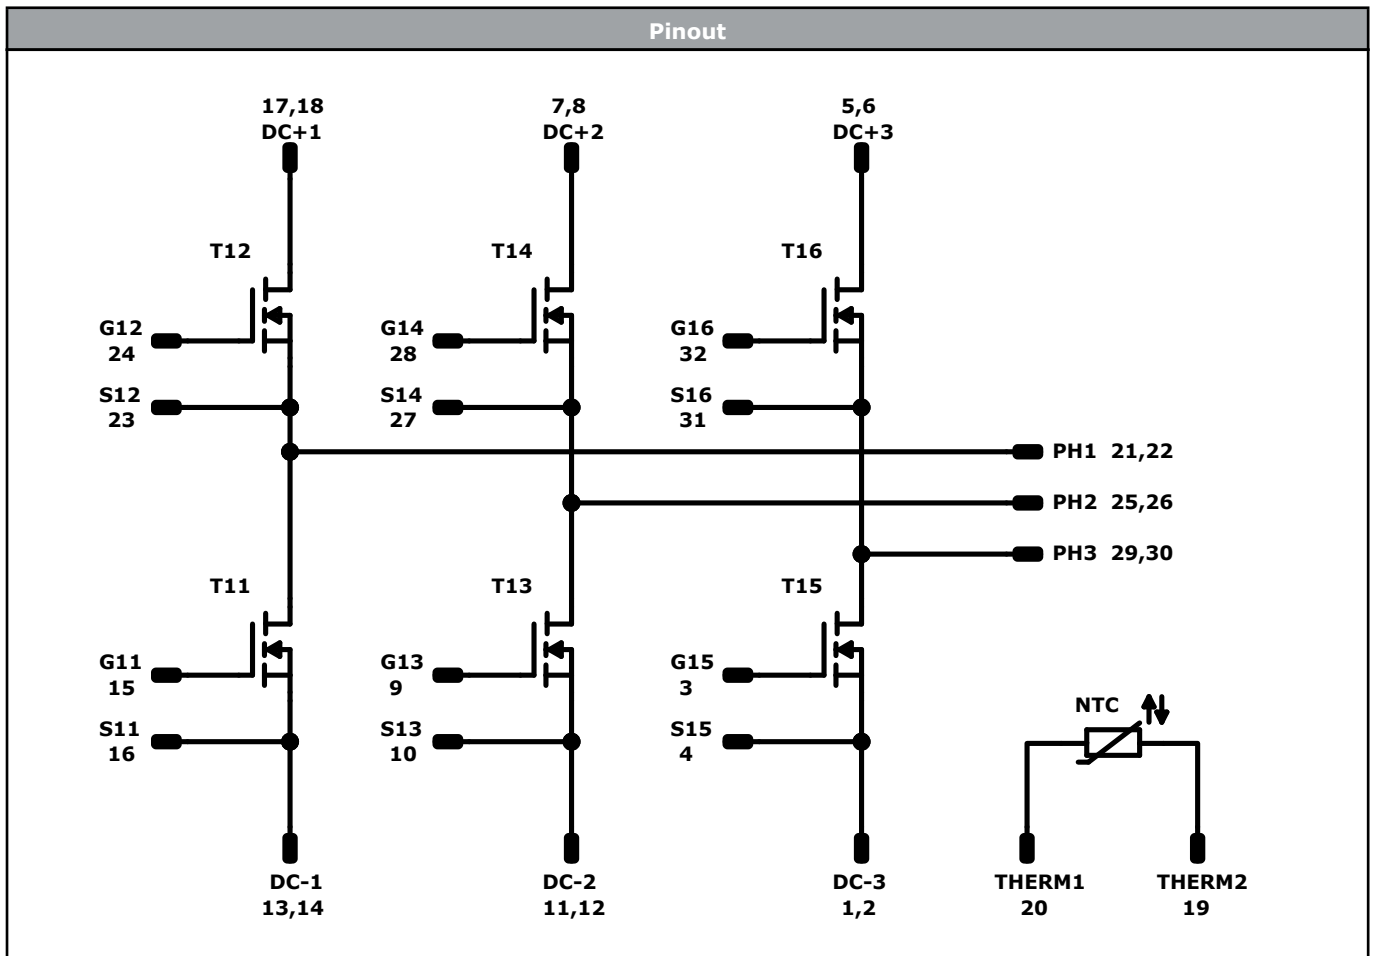

Identification					
ID	Component	Voltage	Current	Function	Comment
T11, T12, T13, T14, T15, T16	MOSFET	900 V	32,5 mΩ	Inverter Switch	
NTC	NTC			Thermistor	




Vincotech

Packaging instruction				
Standard packaging quantity (SPQ) 100	>SPQ	Standard	<SPQ	Sample

Handling instruction
Handling instructions for <i>flow 1</i> packages see vincotech.com website.

Package data
Package data for <i>flow 1</i> packages see vincotech.com website.

Vincotech thermistor reference
See Vincotech thermistor reference table at vincotech.com website.

UL recognition and file number
This device is certified according to UL 1557 standard, UL file number E192116. For more information see vincotech.com website. 

Document No.:	Date:	Modification:	Pages
10-PY096PA035ME-L224F18Y-D2-14	30 Nov. 2021	Static and thermal characteristics are updated New datasheet format, module is unchanged	

DISCLAIMER

The information, specifications, procedures, methods and recommendations herein (together "information") are presented by Vincotech to reader in good faith, are believed to be accurate and reliable, but may well be incomplete and/or not applicable to all conditions or situations that may exist or occur. Vincotech reserves the right to make any changes without further notice to any products to improve reliability, function or design. No representation, guarantee or warranty is made to reader as to the accuracy, reliability or completeness of said information or that the application or use of any of the same will avoid hazards, accidents, losses, damages or injury of any kind to persons or property or that the same will not infringe third parties rights or give desired results. It is reader's sole responsibility to test and determine the suitability of the information and the product for reader's intended use.

LIFE SUPPORT POLICY

Vincotech products are not authorised for use as critical components in life support devices or systems without the express written approval of Vincotech.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in labelling can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.