



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2022/03/10




SPECIFICATION:

1. Contact Resistance: 50mΩ
2. Contact Force: 70g±20g at 1.0 working stroke
3. Durability: 50,000 Cycle Min.
4. Operating Temperature Range: -30°C~+60°C
3. Soldering by manual only



303D-L380F04	2A	12VDC	200g
Match P/N	Current	Voltage	Magnetic Adsorption Force

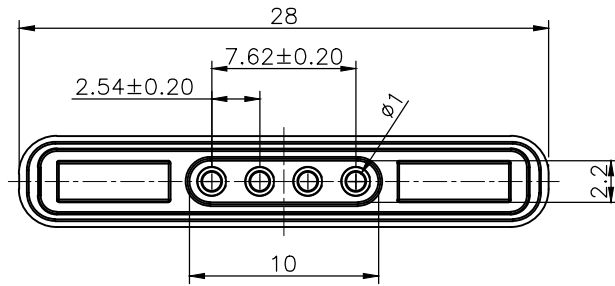


fluttering of pin axis

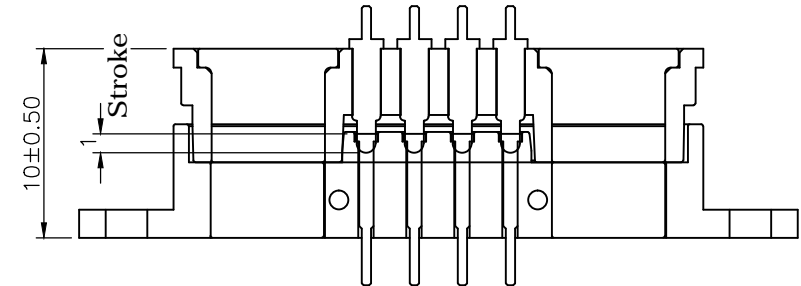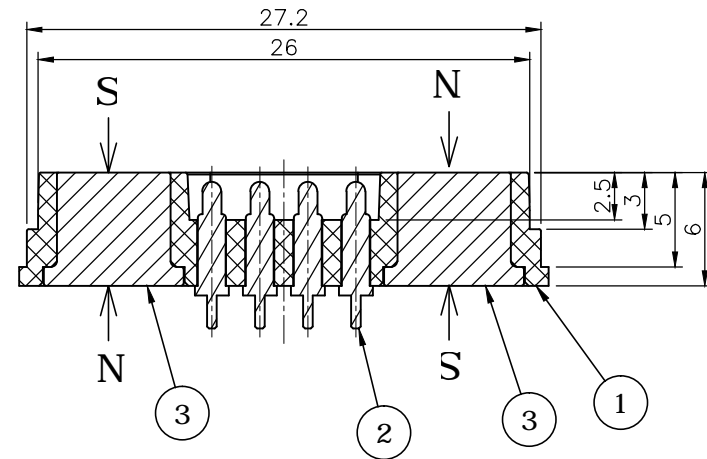

ASSEMBLY

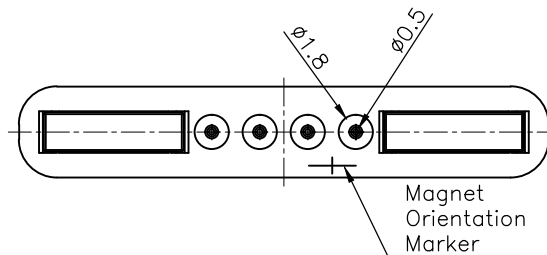

Recommended layout
General tolerance: ±0.05mm

4	GLUE	LSR-67			
3	MAGNET	N52 NdFeB, Nickel plating			
2	POGO PIN	Lead Free Brass, 5u" Gold plating over Nickel			
1	HOUSING	HTN, UL94V-0, Black			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	SIZE	LINEAR	ANGLES		
	mm	0~6	±0.1	±2°	
		6~30	±0.2		
30~150	±0.3				
DRAWN		Fros	2022/03/10	 www.attend.com.tw DRAWN NAME: Pogo Pin Magnet Type, 4P 28.0x4.8x6h, 5u", 500g, 2A, black	
CHECKED		Tim	2022/03/10		
APPROVED		Ken	2022/03/10		
SCALE		2.5	SHEET 1/1		PRODUCT NO. 303D-L280M04
SIZE		A4			FILE NAME 303D-L280M04_B_1