



GNSS PASSIVE ANTENNA LINEAR POLARIZATION - SMA MOUNT





Technical Data Sheet

GNSS PASSIVE ANTENNA LINEAR POLARIZATION - SMA MOUNT

SERIES PAGE **2/3** ISSUE 30-10-18B PART NUMBER R380300035 **ANTENNA**

ELECTRICAL CHARACTERISTICS

GALILEO E1 - GPS L1 (1559-1591) MHz Frequencies Range: MHz

GLONASS (1597-1607)

Nominal Impedance: 50 Ω VSWR: 2.5:1 Тур.

Typical gain: -3 dBic

Dipolar Radiation pattern

Polarization: Linear vertical

Male SMA Connector type:

MECHANICAL CHARACTERISTICS

Antenna color: **BLACK**

Radome material: **Ultem 1000**

Radome texture: Charmille 27-30

Overall length: 44.5 mm

Weight 10 g

ENVIRONMENTAL CHARACTERISTICS

° C Operating -40/+71 MIL-STD-810G, Methods temperature:

501.5 & 502.5, Proc. II -40/+85 ° C Storage

MIL-STD-810G, Methods temperature:

501.5 & 502.5, Proc. I

Humidity

Relative Through Op. Temp range MIL-STD-810G, Meth 507.5 Humidity (Non-condensing):

Proc. II

Immersion (mated)

Hours 1120 W/m²

Solar Radiation MIL-STD-810G, Meth 505.5, Procedures II

MIL-STD-810G, Meth 509.5

4 x 24 h

Salt Fog





PAGE 3/3 ISSUE 30-10-18B SERIES PART NUMBER R380300035

ELECTRICAL PERFORMANCES

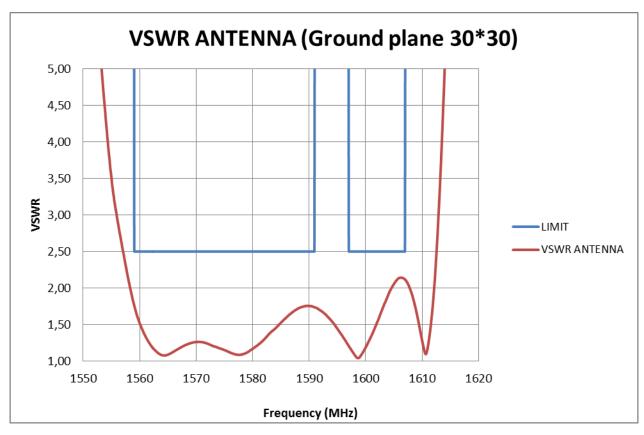


Figure 1: VSWR

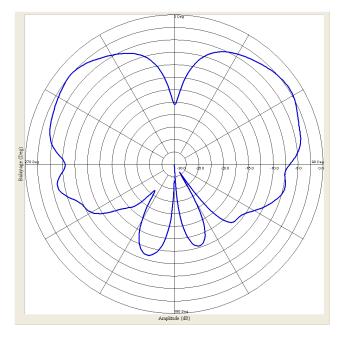


Figure 2: Radiation pattern on ground plane at 1575 MHz (RHCP)