


TITLE: 12 W 18GHZ SMA/fem COAXIAL TERMINATION

LTR. B

DRAWING

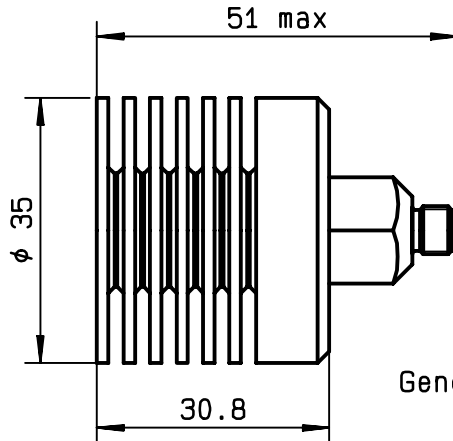

General tolerances: +/- 0.5 mm

ELECTRICAL CHARACTERISTICS


FREQUENCY RANGE	: DC - 18GHz
IMPEDANCE	: 50 Ohms
DC RESISTANCE	: 50 Ohms ± 5 %
AVERAGE POWER HANDLING	: 12 W at 75°C
PEAK POWER HANDLING	: 300 W (1 μs, 1%.) at 25°C
V.S.W.R :	DC - 4 GHz : ≤ 1.15
	4 - 8 GHz : ≤ 1.20
	8 - 12.4 GHz : ≤ 1.25
	12.4 - 18 GHz : ≤ 1.30

MECHANICAL CHARACTERISTICS

CONNECTOR	: SMA female per MIL C 39012
MAXIMUM WEIGHT	: 75 grams

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C)	: -55 , +125
STORAGE TEMPERATURE RANGE (°C)	: -55 , +125

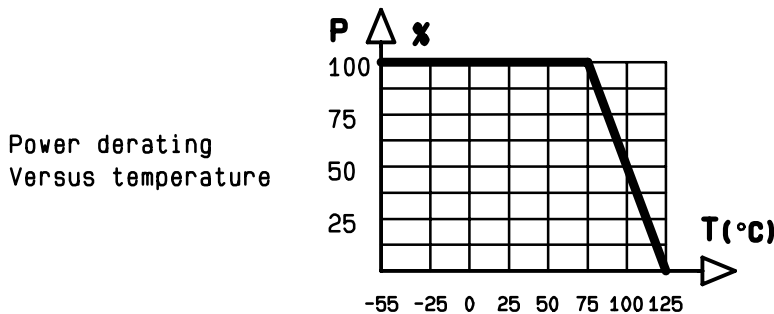

Tentative data subject to change without notice

PEN CAT	QUALITY Dpt App.					
			B	New format	29.10.92	PG
PAGE 1 / 1	DATE 30.01.90	NAME DP	B	new model	30.01.90	KL
LTR	REVISIONS			DATE	APP.	