


Datamate L-Tek Connectors

Male Crimp Kit

- Part numbers are for a complete kit of a housing and the applicable number of contacts.
- Contacts are rear insertable.
- Spare contacts are available - see the following page.
- Back potting & cable assembly service available, contact cables@harwin.com.

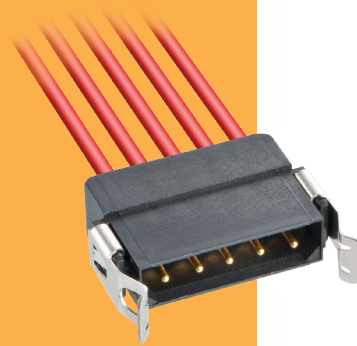

DATAMATE L-TEK

SINGLE ROW	CALCULATION	DOUBLE ROW	CALCULATION
	A B + 5.6		A B + 5.6
Latches (when fitted) add 0.5mm to overall length 'A'	B (Total no. of contacts - 1) x 2	Latches (when fitted) add 0.5mm to overall length 'A'	B Total no. of contacts - 2

TOOLS	WIRE STRIPPING DETAILS
<p>Recommended Crimp Tool - M22520/2-01</p> <p>Positioner - T5747</p> <p>Contact Insertion/Removal Tool - Z80-280</p> <ul style="list-style-type: none"> Spare contacts shown on following page. Instruction sheets available at www.harwin.com/instructions. 	

HOW TO ORDER

M80 - 8XX XX 05

SERIES CODE

SINGLE ROW	DOUBLE ROW	
806	810	Small Bore (24-28 AWG), No Latches
807	811	Large Bore (22 AWG), No Latches
808	812	Small Bore (24-28 AWG), Locking Latch
809	813	Large Bore (22 AWG), Locking Latch

FINISH

05 Gold

TOTAL NO. OF CONTACTS

02, 03, 04, 05, 06, 07	Single Row
04, 06, 08, 10, 12	Double Row

All dimensions in mm.