


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

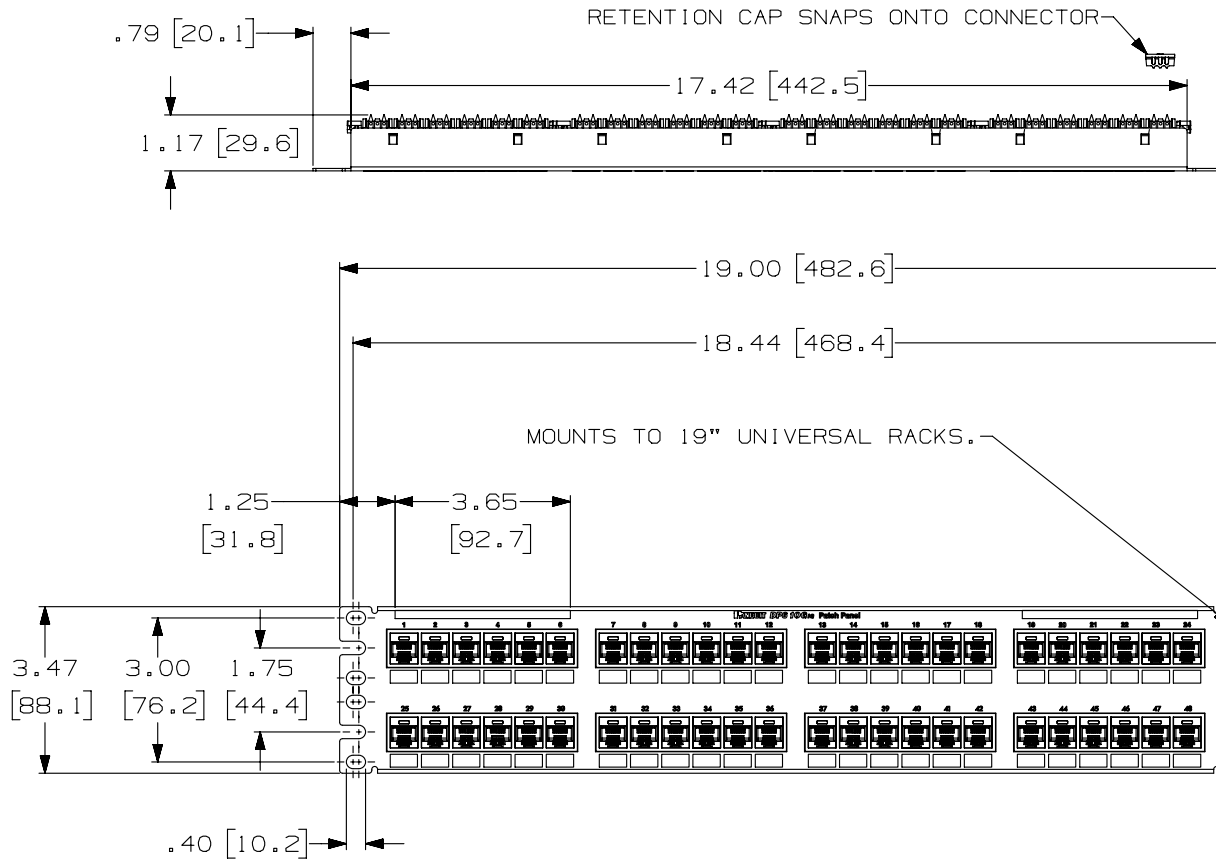

PANDUIT PART NO.	WEIGHT (APPOX.)
DP486X88TGY	2.2 lb (997.9 g)

- NOTES:
- SEE CURRENT CATALOG FOR VARIOUS APPLICATIONS AS WELL AS OPTIONAL ICONS.
  - MATERIAL:  
 PANEL HOUSING: STEEL  
 RJ45 MODULES: THERMOPLASTIC RESIN UL94V-0  
 PUNCHDOWN BLOCKS: THERMOPLASTIC RESIN UL94V-0  
 BEZEL ASSEMBLY: THERMOPLASTIC RESIN UL94H-B  
 RETENTION CAP: THERMOPLASTIC RESIN UL94V-0
  - 48 PORT PATCH PANEL 8 POSITION 8 WIRE.
  - THE PATCH PANEL IS DESIGNED FOR MOUNTING TO 19" UNIVERSAL RACKS.
  - FOUR (4) 12-24 X 1/2" ROUND HEAD SCREWS AND (4) M6x1x15MM METRIC SCREWS ARE PROVIDED FOR FASTENING TO RACKS.
  - DIMENSIONS IN BRACKETS ARE IN METRIC.
  - USE 110 STYLE TERMINATION TOOL FOR PUNCHDOWN.
  - RETENTION CAPS (ONE PER CONNECTOR) PROVIDED FOR SNAP-IN ON TERMINATED CONNECTORS.

PART NUMBER		DP486X88TGY	
TITLE			
DP6A 10GIG 48 PORT PATCH PANEL			
CUSTOMER DRAWING			
ITEM REVISION NAME		M02479JA/01	
DATASET FILE NAME		M02479JA_DC237/01A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x ±		.xxx ± .010 (.3)	
.xx ± .03 (.8)		ANGLES ±	
DRAWING NUMBER:		02479-237	
THIRD ANGLE PROJECTION	SEE NOTE 2		
THIRD ANGLE PROJECTION	DRAWING NUMBER:		
DRAWN BY		LZ	
DATE		3-4-06	
CHK		CEF	
SCALE		.25-1	
SHT 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
2	5-22-14	MDJR	REFR	EJH	A. UPDATED TITLE BLOCK. REMOVED PREVIOUS REVISIONS FOR CLARITY.	02479-237

D10100DA/14

2

1

2

1