

NOTES:

1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 12.4 GHz
- 1.2 ATTENUATION VALUES AND ACCURACY:
  - 1.2.1 0 dB +0.3 dB
  - 1.2.2 1 to 10 dB ±0.3 dB
  - 1.2.3 11 to 20 dB ±0.5 dB
  - 1.2.4 21 to 40 dB ±1.0 dB
  - 1.2.5 41 to 60 dB ±1.5 dB

1.3 VSWR: 1.07 + .015f (GHz)

2.0 MAXIMUM INPUT POWER:

2 WATTS AVERAGE AT +25°C DERATED LINEARLY  
TO 0.5 WATTS AT +125°C


3.0 OPERATING TEMPERATURE RANGE: -65°C TO +125°C

4.0 MARKING: MARK UNIT AS SHOWN.

(REF.: INK-03805-27-XX)

5.0 DIMENSIONS IN PARENTHESIS ARE  
IN MILLIMETERS.

MODEL NUMBER  
ATT-0205-XX-SMA-02  
REV.  
G1

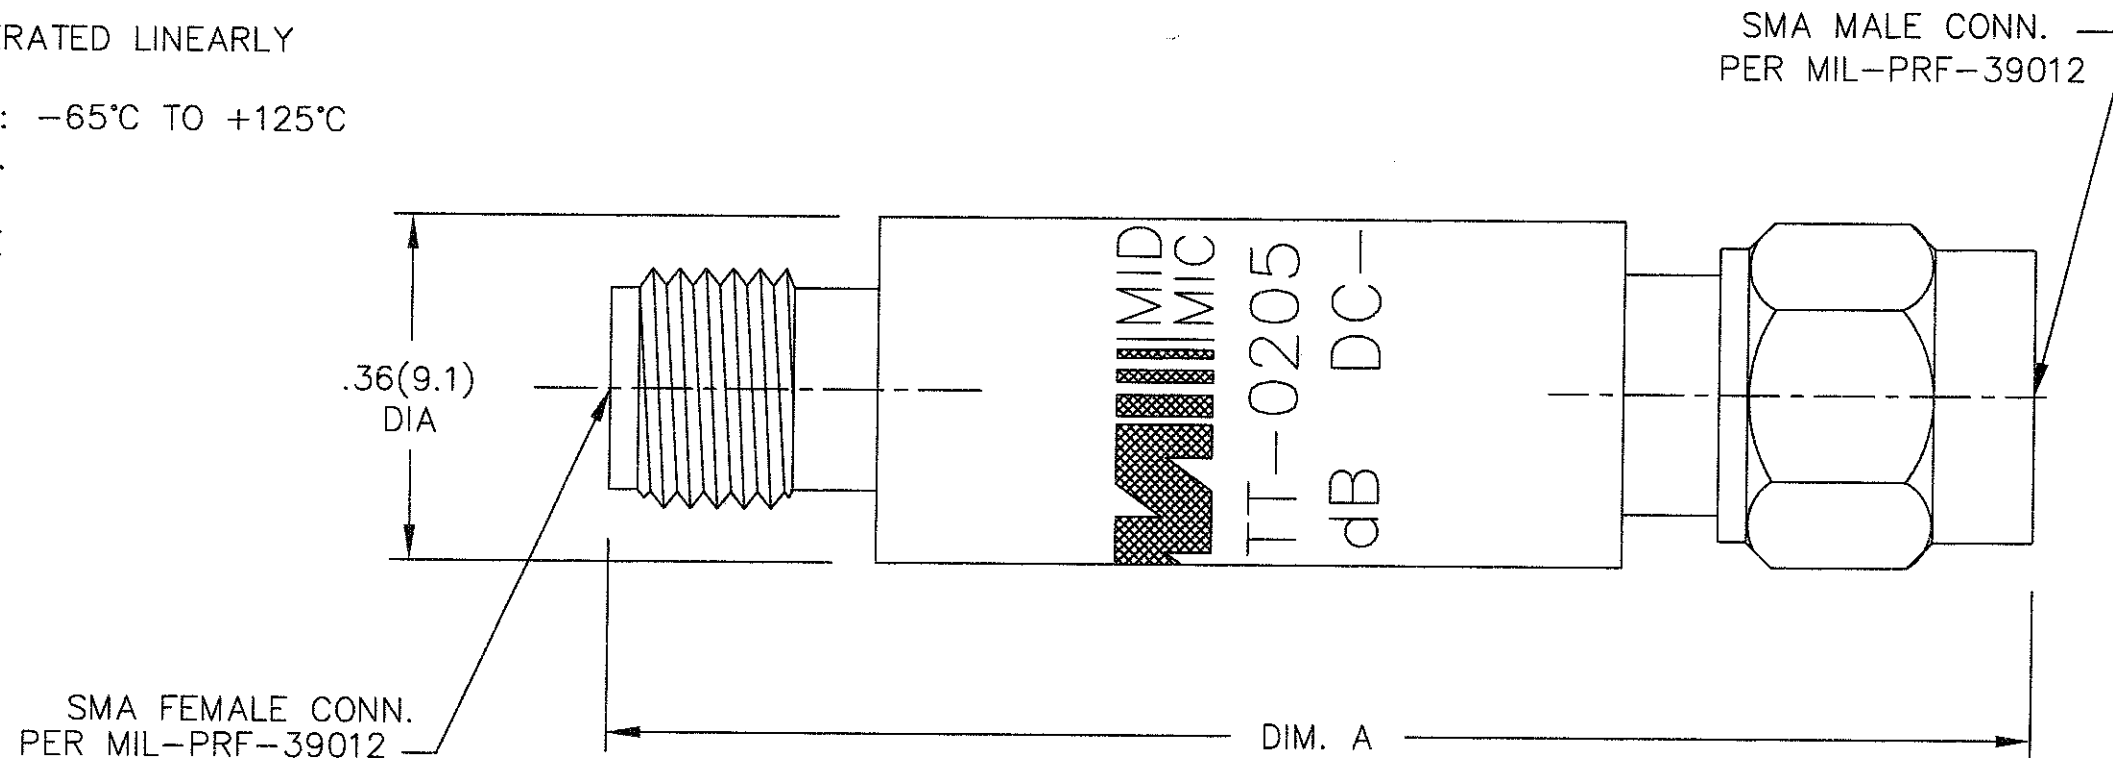

WAS DWG. 02332-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	3/28/91
A	ECR 3656	6/17/85
B	ECR 4003	11/1/85
C	ECR 4689	7/24/86
D	ECR 6545	7/20/89
E	ECR 6933	8/17/90
F	ECN 11565	3/3/92
G	ECN 20115	10/5/04
G1	ADDED TITLEBLOCK	11/17/05

21 to 60 dB	1.49(37.8)
0 to 20 dB	1.20(30.5)
-XX- ATTENUATION VALUE	LENGTH A

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:		FSCM NO. <b>34078</b>		<b>MIDWEST MICROWAVE</b>	
3 PLACE DECIMALS ±.005		NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE  MINIATURE ATTENUATOR	
2 PLACE DECIMALS ±.02					
FRACTIONS ±1/64					
PARALLELITY: T.I.R. _____					
FLATNESS: T.I.R. _____		DRAWN/DATE D.ESTY 8/17/90	ENG./DATE G.KOZAK 3/27/91	DRAWING NUMBER ATT-0205-XX-SMA-02	
CONCENTRICITY: T.I.R. _____		CHECKED/DATE A.BEATTY 3/26/91	APPROVED/DATE	SCALE: 5=1	
ANGLES AND PERPENDICULARITY: ±1°				SHEET 1 of 1	