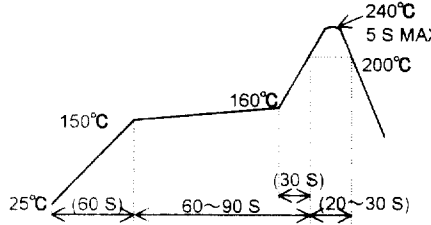


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	
△					△					
△					△					
APPLICATION STANDARD										
RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C			STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C				
	VOLTAGE	AC 50 V			OPERATING HUMIDITY RANGE	RELATIVE HUMIDITY : 95 % MAX (NO DEW CONDENSATION IS PERMITTED)				
	CURRENT	0.3 A								
SPECIFICATIONS										
ITEM	TEST METHOD				REQUIREMENT				QT	AT
CONSTRUCTION										
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.			ACCORDING TO DRAWING				X	X
MARKING		CONFIRMED VISUALLY.							X	X
ELECTRICAL CHARACTERISTICS										
CONTACT RESISTANCE		100 mA (DC OR 1000 Hz).			70 mΩ MAX.				X	X
INSULATION RESISTANCE		100 V DC.			100 MΩ MIN.				X	-
VOLTAGE PROOF		150 V AC FOR 1 min.			NO FLASHOVER OR BREAKDOWN.				X	X
MECHANICAL CHARACTERISTICS										
INSERTION AND WITHDRAWAL FORCES		MEASURED BY APPLICABLE CONNECTOR.			INSERTION FORCE: 60 N MAX WITHDRAWAL FORCE: 2.5 N MIN.				X	-
MECHANICAL OPERATION		50 TIMES INSERTION AND EXTRACTIONS.			1)CONTACT RESISTANCE: 80 mΩ MAX. 2) NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	-
VIBRATION		FREQUENCY: 10 TO 55 Hz SINGLE AMPLITUDE: 0.75 mm. — m/s ² AT 10 CYCLES FOR 3 DIRECTIONS.			1)NO ELECTRICAL DISCONTINUITY OF 1 μs MIN. 2)NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	-
SHOCK		490 m/s ² DURATION OF PULSE 11 ms AT 3 TIMES FOR 3 DIRECTIONS.							X	-
ENVIRONMENTAL CHARACTERISTICS										
DAMP HEAT (STEADY STATE)		EXPOSED AT 40±2 °C, 90~95 %, 96 h.			1)CONTACT RESISTANCE: 80 mΩ MAX. 2)INSULATION RESISTANCE: 100 MΩ MIN.				X	-
RAPID CHAGE OF TEMPERTURE		TEMPERTURE -55→15~35→ 85→15~35°C TIME 30→ 2~ 3→ 30→ 2~ 3min. UNDER 5 CYCLES.			3)NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	-
DRY HEAT		EXPOSED AT 85 °C, 96 h.			1)CONTACT RESISTANCE: 80 mΩ MAX.				X	-
COLD		EXPOSED AT -55 °C, 96 h.			2)NO DAMAGE, CRACK AND LOOSENESS OF PART.				X	-
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.			NO HEAVY CORROSION.				X	-
SULPHUR DIOXIDE		EXPOSED IN 10 PPM FOR 96 h. (TEST STANDARD:JIS C 0090)			1)CONTACT RESISTANCE: 80 mΩ MAX. 2)NO HEAVY CORROSION.				X	-
RESISTANCE TO SOLDERING HEAT		REFLOW RECOMMENDED TEMPERATURE PROFILE  25°C (60 S) 150°C 160°C 240°C 5 S MAX 200°C (30 S) (20~30 S) TO BE TESTED UNDER THE ABOVE CONDITIONS			NO MELTING OF RESIN WHICH AFFECTS THE PERFORMANCE OF COMPONENT				X	-
SOLDRABILITY		SOLDERED AT SOLDER TEMPERATURE. 235 °C FOR IMMERSION DURATION, 2 s.			NO PINHOLE OR DEWETTING ON SOLDERED SURFACE.				X	-
REMARKS					DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED	
					<i>J. Matsukawa</i>	<i>J. Matsukawa</i>	<i>M. Ishida</i>	<i>T. Yoshimura</i>		
UNLESS OTERWISE SPECIFIED, REFER TO JIS C 5402.					00.01.15	00.01.15	00.01.17	00.01.17		
NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST										
HRS HIROSE ELECTRIC CO., LTD.					SPECIFICATION SHEET			PART NO. FX11A - 100P - SV (22)		
CODE NO.(OLD) CL			DRAWING NO ELC4 - 152606 - 02			CODE NO. CL 573 - 0543 - 7 - 22			1 1	

TO
PCK