


## Specification Sheet

Part Number: 596-00257

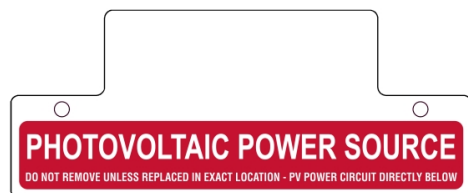

Solar Marker, Reflective, Non-Adhesive, PV POWER SOURCE, 6.75" x 2.75", VL, Red, 1/pkg

Article Number

596-00257

Type

PVPSRTM

Color

Red (RD)

### Features & Benefits

- Pre-Printed Solar Labels are made using high performance UV stable materials and adhesives for long outdoor life.
- Designed to meet NEC and IFC standards for PV installation labeling, the pre-printed Solar labels come printed with the most common legends required by the AHJ (Authority Having Jurisdiction) used on large utility and scaled projects to ensure code compliance during inspection.
- Labels are UV stable and made with special high bond adhesives to stick to both powder coat painted surfaces and baked enamel surfaces found on most disconnect switches and breaker boxes.
- The printed inks meet the fire safety standards of the IFC (International Fire Code) and also meet the requirements of UL969 for high reflectivity and durability.

Quantity Per

EA

**Product Description**

Designed to meet NEC2014 and NEC2017 Section 690.4(F) as interpreted by the International Association of Electrical Inspectors (IAEI,) HellermannTyton offers an aluminum and vinyl label designed for use on almost any type of roof shingle. Mount via a pre-cut aluminum plate with aluminum clips (both supplied with label) to standard tar shingles; or bend, shape and fasten with construction adhesive or grommet screws on composite or wooden roofing. Label text is reflective to meet IFC requirements.

**Short Description**

Solar Marker, Reflective, Non-Adhesive, PV POWER SOURCE, 6.75" x 2.75", VL, Red, 1/pkg

**Global Part Name**

PVPSRTM-242/552-RD

**Technical Description**

Pre-Printed Solar Label, Reflective, Roof Top Label, 6.75" X 2.75", PV POWER SOURCE, Red

**Local Order Number 2**

Spanish Version: 596-00822

**Length L (Imperial)**

6.75

**Length L (Metric)**

171.4

**Width W (Imperial)**

6.75

**Width W (Metric)**

171.4

**Height H (Imperial)**

2.75

**Height H (Metric)**

69.85

**Material**

Type 242/552, UV Stable Reflective Vinyl w/Acrylic Laminate

**Material Shortcut**

242/552

<b>Adhesive</b>	Acrylic
<b>Halogen free</b>	Yes
<b>Adhesive Operating Temperature</b>	-40°F to +302°F (-40°C to +150°C)
<b>Operating Temperature (Metric)</b>	-40°F to +174°F (-40°C to +79°C)
<b>ROHS Complaint</b>	Yes
<b>Certification/Specification WEB</b>	NEC2011 IFC 2012 UL 969
<b>Warranty (US)</b>	Yes
<b>UL Recognized (US)</b>	Yes
<b>Package Quantity(Imperial)</b>	1
<b>Package Quantity (Metric)</b>	1
<b>Customs Number</b>	3919905060
<b>Labels per Column</b>	1
<b>Labels per Row</b>	1