
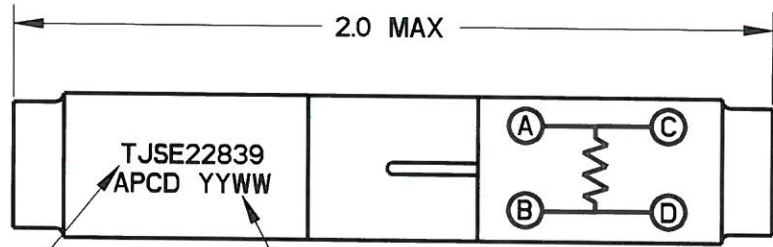


REV	ECN	APP'D
-	6582	<i>JT 9/10/10</i>



WHITE MARKING
.06 HT

DATE CODE

- NOTES:
- MATERIALS:
HOUSING: POLYETHERIMIDE, COLOR BLACK
GROMMET: SILICONE ELASTOMER, COLOR BLUE
INTERNAL CONTACT: COPPER ALLOY, GOLD PLATED, PER MIL-DTL-45204, TYPE I, GRADE C, CLASS I 50 MICROINCH MIN. OVER NICKEL PER SAE-AMS-QQ-N-290, CLASS 1, 50/30 MICROINCH MIN.
CONTACT RETAINER: STAINLESS STEEL
 - SPLICE ACCEPTS (4) MATING M39029/1-100 CONTACTS (INCLUDED)
 - PART COMPLIES TO ALL REQUIREMENTS PER SAE-AS8174.
 - RESISTOR: 4.99Ω , 1/4W, $\pm 1\%$, RLR07C4R99FM

DIMENSIONS ANSI Y14.5M UNITS: INCHES Pro/E FILE	TOLERANCES .XX ± 0.01 .XXX ± 0.005 ANGLES $\pm 2.0^\circ$	PROJECTION 	Amphenol Pcd SPECIFICATION DRAWING		TITLE WIRE SPLICE, ELECTRONIC RESISTOR, 4.99Ω , 1/4W, 1% SIZE 22		
			ENGR M. DiGIACOMO 08/12/09		SIZE	DWG NO.	REV
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA	CHKD <i>Rid Nunn 9/10/10</i>	A	TJSE22839_C			
		APPD <i>Jarl to 9/10/10</i>	CODE: 58982	SCALE: 2:1	SHEET 1 OF 1		