

NOTES:


1.0 ELECTRICAL SPECIFICATIONS:

- 1.1 FREQUENCY RANGE: DC to 26.5 GHz
- 1.2 MAXIMUM INPUT POWER: 2 WATT AVG. @ +25°C  
DERATED LINEARLY TO 1 WATT @ +125°C
- 1.3 TEMPERATURE RANGE:  
OPERATING: -65°C to +125°C  
STORAGE: -65°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: DC to 18GHz: 1.05 +0.008f(GHz) MAX.  
18.0 to 26.5GHz: 1.30:1 MAX.
- 1.6 WEIGHT: 0.12 Oz. (3.4 GRAMS)

2.0 MARKING:

MARK UNIT AS SHOWN  
(REF: INK-02639-27-34)

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

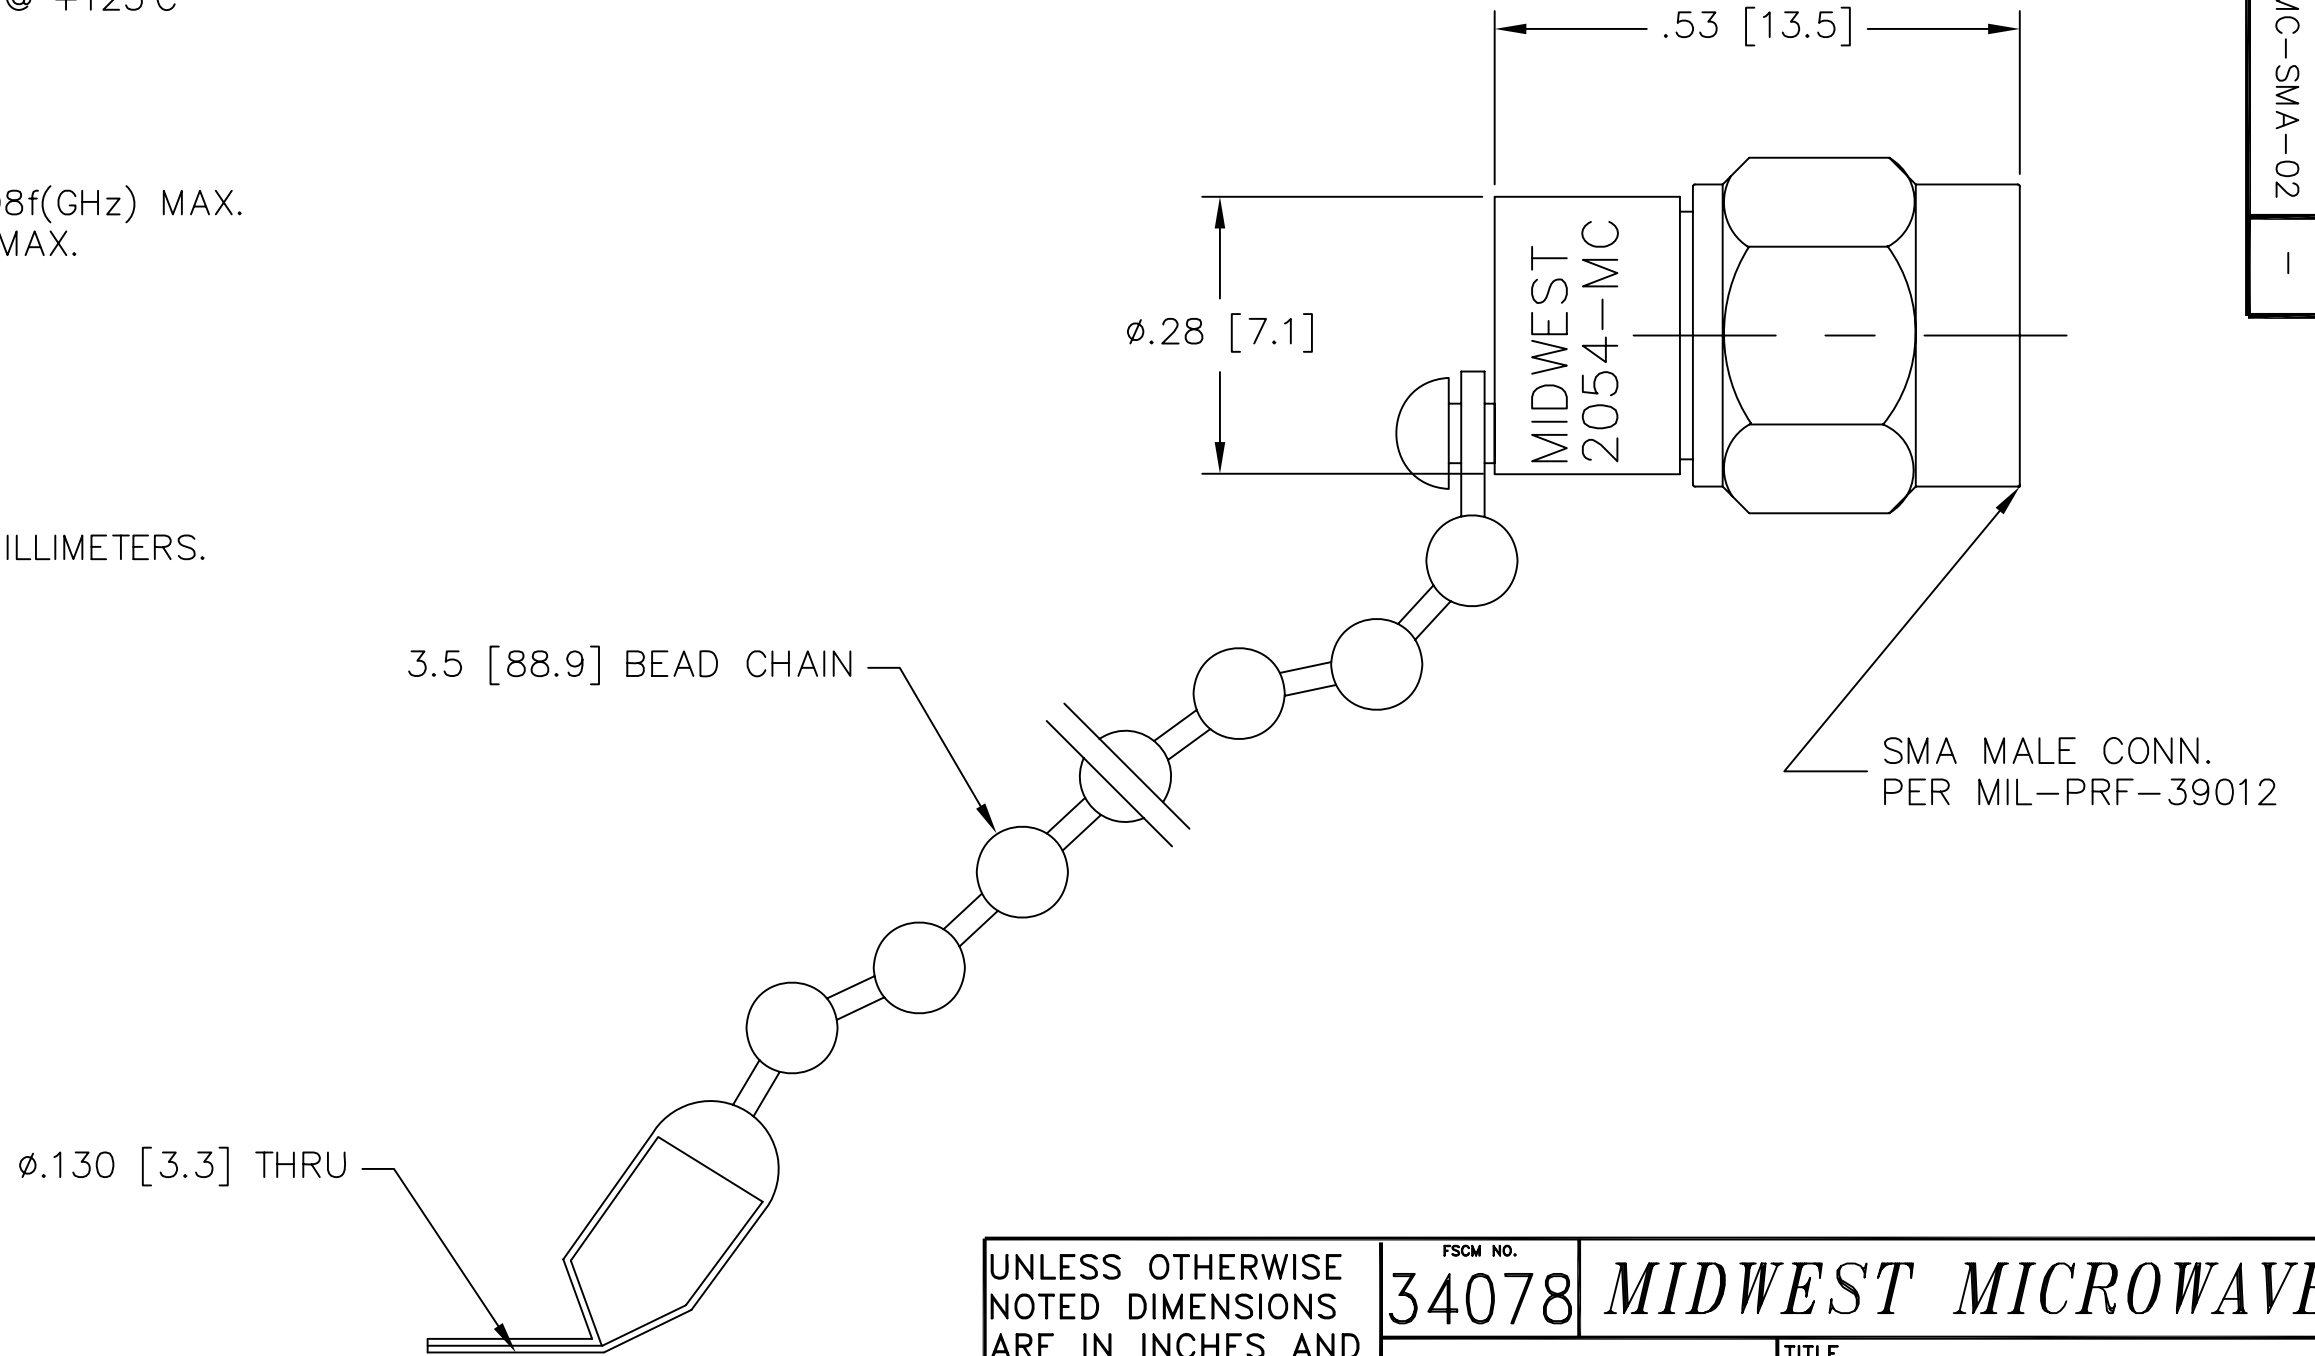

MODEL NUMBER  
TRM-2054-MC-SMA-02  
REV.  
-

REV.	-	DATE	11/26/03
DESCRIPTION	RELEASED		

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:  3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'	FSCM NO. <b>34078</b>	<b>MIDWEST MICROWAVE</b>	
	NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Midwest Microwave		TITLE TERMINATION
DRAWN/DATE S.ORLOV 11/26/03	ENG./DATE G.KOZAK 11/26/03	DRAWING NUMBER TRM-2054-MC-SMA-02	
CHECKED/DATE	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1