
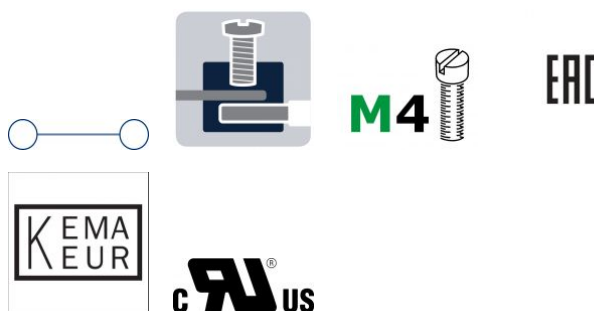


1138.3

TK 10 OG

TK 10 OG

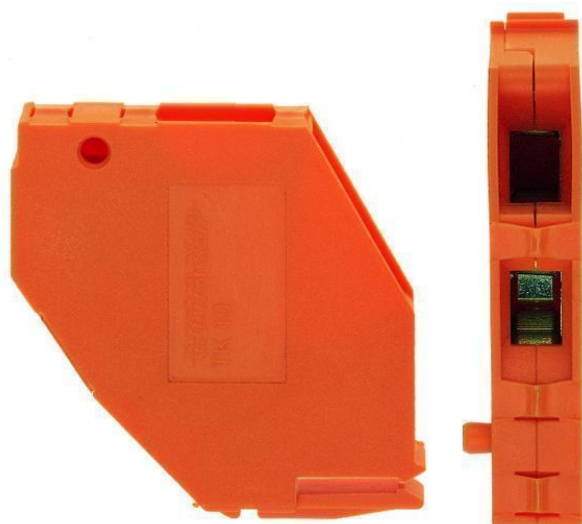

Transformer terminal, Screw connection, Mounting type: Custom profile, Rated cross-section: 4 mm², Width: 9 mm, Colour: Orange

Business data

Product description	Transformer terminal
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	15.2
Weight per piece (including packaging)	15.34
Unit of weight	G
Customs number	85369010
Country of origin	DE

1138.3

TK 10 OG

TK 10 OG

Technical Data

Dimensions

Length	40.5 mm
--------	---------

Width	9 mm
-------	------

Height	41 mm
--------	-------

Ratings

Rated voltage	800 V
---------------	-------

Rated current	32 A
---------------	------

Rated cross-section	4 mm ²
---------------------	-------------------

Rated impulse voltage	8 kV
-----------------------	------

Overvoltage category	III
----------------------	-----

Contamination degree	3
----------------------	---

1138.3

TK 10 OG

TK 10 OG

Technical Data

Connection data

Connection principle	Screw connection
Connections	2
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	10 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	10 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	10 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	10
Stripping length	12 mm
Screw head	Slotted
Screw threading	M 4
Tightening torque, min.	1.2 Nm
Tightening torque, max.	2 Nm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0

1138.3

TK 10 OG

TK 10 OG

Technical Data

Materials

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Custom profile
---------------	----------------

Gauge plug acc. to EN 60 947-1	A5
--------------------------------	----

1138.3

TK 10 OG

TK 10 OG

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

cUL Recognized

cUL Recognized	C22.2 No 158
----------------	--------------

cUL Recognized	✓
----------------	---

cUL Usegroup B: rated voltage	600 V
-------------------------------	-------

cUL Usegroup B: rated current	65 A
-------------------------------	------

cUL Usegroup C: rated voltage	600 V
-------------------------------	-------

cUL Usegroup C: rated current	65 A
-------------------------------	------

cUL wire cross-section single-core (rigid) AWG, min.	22
--	----

cUL wire cross-section single-core (rigid) AWG, max.	6
--	---

cUL wire cross-section stranded AWG, min.	22
---	----

cUL wire cross-section stranded AWG, max.	6
---	---

cUL torque	12 Nm
------------	-------

cUL wire material	Cu
-------------------	----

1138.3

TK 10 OG

TK 10 OG

Approvals

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	800 V
KEMA rated current	57 A
KEMA rated impulse voltage (fuse holder without electrical components)	8 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	10 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	10 mm ²
KEMA torque, min.	1.2 Nm
KEMA torque, max.	2 Nm

1138.3

TK 10 OG

TK 10 OG

Approvals

UL Recognized


UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	65 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	65 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	6
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	6
UL torque, max.	12 Lb In.
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

1138.3

TK 10 OG

TK 10 OG

Media



M4



EAC



1138.3

TK 10 OG

TK 10 OG

Accessories


Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 7.5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3327.7	PMC SB 7,5/40 So WH	4044211128845	400 PC



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 7.5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9326.7	PMC SB 7,5/40 WH	4044211157784	400 PC

1138.3

TK 10 OG

TK 10 OG

Accessories

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 PC
