


1338.2

BKA 2,5/4 e.B. BG

BKA 2,5/4 e.B. BG

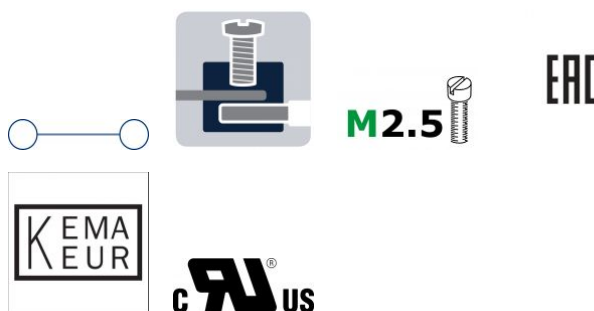

Feed-through terminal for direct mount, Screw connection, Mounting type: Mounting surface, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Beige

## Business data

Product description	Feed-through terminal for direct mount
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	19.8
Weight per piece (including packaging)	20.74
Unit of weight	G
Customs number	85369010
Country of origin	DE

**1338.2**

**BKA 2,5/4 e.B. BG**

**BKA 2,5/4 e.B. BG**

## Technical Data

---

### Dimensions

---

Length	34.6 mm
Height	23 mm
Hole spacing (mid-point to mid-point)	27.5 mm
Pitch	5 mm

### Ratings

---

Rated voltage	400 V
Rated current	24 A
Rated cross-section	2.5 mm <sup>2</sup>
Rated impulse voltage	6 kV
Overvoltage category	III
Contamination degree	3

1338.2

BKA 2,5/4 e.B. BG

BKA 2,5/4 e.B. BG

## Technical Data

---

### Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	8
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	12
Stripping length	7 mm
Screw head	Slotted
Screw threading	M 2,5
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.8 Nm

1338.2

BKA 2,5/4 e.B. BG

BKA 2,5/4 e.B. BG

## Technical Data

---

### Materials

---

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------

### Further technical data

---

Mounting type	Mounting face
---------------	---------------

Gauge plug acc. to EN 60 947-1	A3
--------------------------------	----

End plate required	✓
--------------------	---

1338.2

BKA 2,5/4 e.B. BG

BKA 2,5/4 e.B. BG

## Approvals

---

### Standards and regulations

---

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

### cUL Recognized

---

cUL Recognized	C22.2 No 158
----------------	--------------

cUL Recognized	✓
----------------	---

cUL Usegroup B: rated voltage	300 V
-------------------------------	-------

cUL Usegroup B: rated current	20 A
-------------------------------	------

cUL Usegroup C: rated voltage	300 V
-------------------------------	-------

cUL Usegroup C: rated current	20 A
-------------------------------	------

cUL wire cross-section single-core (rigid) AWG, min.	22
--	----

cUL wire cross-section single-core (rigid) AWG, max.	12
--	----

cUL wire cross-section stranded AWG, min.	22
---	----

cUL wire cross-section stranded AWG, max.	12
---	----

cUL torque	5.3 Nm
------------	--------

cUL wire material	Cu
-------------------	----

1338.2

BKA 2,5/4 e.B. BG

BKA 2,5/4 e.B. BG

## Approvals

---

### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	400 V
KEMA rated current	24 A
KEMA rated impulse voltage	6 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	4 mm <sup>2</sup>
KEMA torque, min.	0.4 Nm
KEMA torque, max.	0.8 Nm

1338.2

BKA 2,5/4 e.B. BG

BKA 2,5/4 e.B. BG

## Approvals

---

### UL Recognized

UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	300 V
UL Usegroup B: rated current	20 A
UL Usegroup C: rated voltage	300 V
UL Usegroup C: rated current	20 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	12
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	12
UL torque	5.3 Lb In
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓


1338.2

BKA 2,5/4 e.B. BG

BKA 2,5/4 e.B. BG

Media

---



**M2.5**



**EAC**





1338.2

BKA 2,5/4 e.B. BG


BKA 2,5/4 e.B. BG

## Accessories

---

### External insulated cross-connector

---

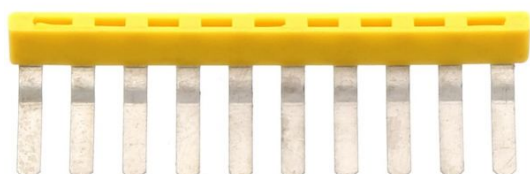

External insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 50.1 mm, Rated current: 27 A; Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2045.0	AQI 10/5/11	4044211048501	10 PC

---



External insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 9.26 mm, Rated current: 27 A; Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2032.0	AQI 2/5/11	4044211048341	50 PC

---

1338.2

BKA 2,5/4 e.B. BG


BKA 2,5/4 e.B. BG

## Accessories

---

### External insulated cross-connector

---




External insulated cross-connector, No. of poles: 3,  
Mounting type: Plug in, Width: 14.36 mm, Rated  
current: 27 A; Colour: Yellow

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2033.0	AQI 3/5/11	4044211048358	50 PC

---



External insulated cross-connector, No. of poles: 4,  
Mounting type: Plug in, Width: 19.46 mm, Rated  
current: 27 A; Colour: Yellow

---

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2044.0	AQI 4/5/11	4044211048495	50 PC

---

1338.2

BKA 2,5/4 e.B. BG


BKA 2,5/4 e.B. BG

## Accessories

---

### Quick-marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm,  
Width: 5 mm, Colour: White

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

---

### Screw driver

---



Screwdriver with bare blade, Colour: Black-grey

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 PC

---