



## 15292.2 SD-S9C SD-S9C

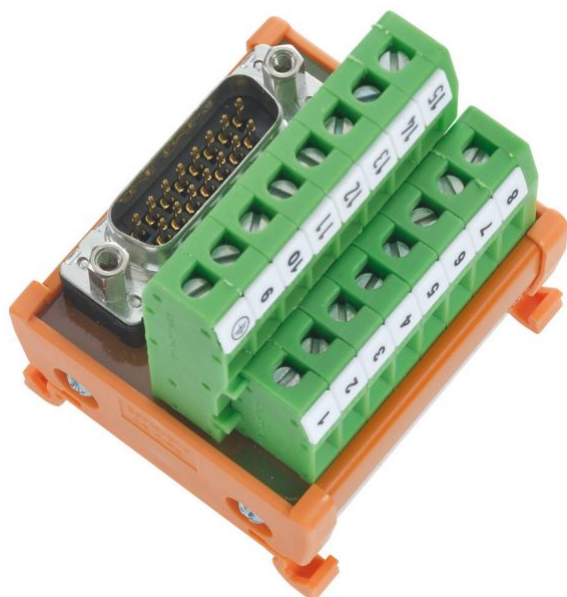

Interface module for D-SUB, Screw connection and male D-SUB plug-in connector, Mounting type: Mounting rail TS 35, No. of poles: 9

### Business data

Product description	Interface module
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	50.1
Weight per piece (including packaging)	93.8
Unit of weight	G
Customs number	85369010
Country of origin	EEC

## 15292.2 SD-S9C SD-S9C

### Technical Data

---

#### Dimensions

---

Length	47 mm
Width	37 mm
Height TS 35/7.5	61 mm

#### Ratings

---

Overvoltage category	III
Contamination degree	2

#### Connection data

---

Connection principle	Screw connection
Number of connections	1
No. of poles	9
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>

**15292.2**  
**SD-S9C**  
**SD-S9C**

## Technical Data

---

### Connection data

---

Stripping length	7 mm
Torque	0.6 Nm

### Input data

---

Max. operating voltage AC/DC	125 V
Current load per channel, max.	1,5 A

### Materials

---

Working temperature, min.	-20 °C
Working temperature, max.	50 °C

### Further technical data

---

Connector type	D-sub male plug
Test voltage	0.67 kV
Shielded	✓

15292.2

SD-S9C

SD-S9C

## Approvals

---

## Standards and regulations

---

Standards / specifications

DIN VDE 0110 / EN 50178

---

15292.2

SD-S9C

SD-S9C

## Media

---

