


28635.4

KES 20/24 BK

KES 20/24 BK

---



Cable entry with membrane for unassembled cables, Mounting type: Screw, Length: 147 mm, Width: 58 mm, IP66, Colour: Black

RAL: 9005

## Business data

---

Product description	Cable Entry
Packaging unit	10
Quantity unit	PC
Weight per piece (not including packaging)	108.1
Weight per piece (including packaging)	115.1
Unit of weight	G
Customs number	39259020
Country of origin	DE

28635.4

KES 20/24 BK

KES 20/24 BK

## Technical Data

---

### Dimensions

---

Length	149.6 mm
Length of wall cutout	112 mm
Width	58 mm
Width of wall cutout	36 mm
Installation height	14.5 mm
Diameter of the screw holes	5.5 mm

### Materials

---

Material	Polyamide 6.6
Glass-fibre reinforced	✓
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	90 °C
Sealing material	TPE
Halogen-free	✓
Silicone-free	✓

28635.4

KES 20/24 BK

KES 20/24 BK

## Technical Data

---

### Further technical data

---

Mounting type	Screws
Protection	IP66
NEMA Type	4x
Number of screw holes	4
Fixing screws	M5 (ISO 4762 / DIN 912)
Torque of the fixing screws	3 Nm
Number of wires	20
Number of cables for cable diameters 3.2 - 6.3 mm	12
Number of cables for cable diameters 5.5 - 10.5 mm	8


28635.4

KES 20/24 BK

KES 20/24 BK

Media

---

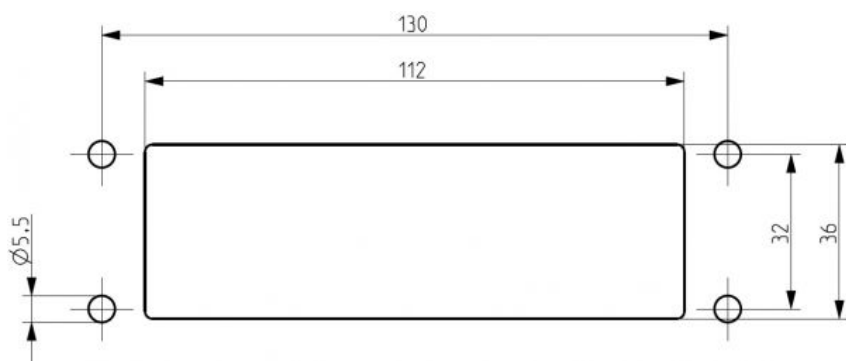

28635.4

KES 20/24 BK

KES 20/24 BK

## Accessories

---

### EMV-Bügel

---



Shield-connection rail enabling mounting of shield connection clips directly on cable entry system KDS and KES, Mounting type: Screw, Length: 35,3 mm, Width: 140 mm, Height: 16 mm, Profile: 10x3 mm

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
28626.0	KDS-EMV-SAB 10/24	4044211219659	1 PC

---

### Blechlocher

---



#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
28752.0	BL-VA KES	4044211221935	1 PC

---

28635.4

KES 20/24 BK

KES 20/24 BK

## Accessories

---

## Blechlocher

---



## In general

Order number	Article designation	GTIN (EAN)	Packaging unit
28744.0	BL KES	4044211221942	1 PC

---