HFA

1/4″ x 1 1/4″ in-line water-resistant fuse holder

RoHS

Product features

- For 1/4" x 1-1/4" (6.35mm x 31.8mm) fuses
- IP54 rating for exposed locations
- Accepts #16 to #12 copper wire
- Copper crimp lead material
- Recommended crimp tools:
  - Thomas & Betts – ERG4002
  - Channellock No. 909
  - Thomas & Betts WT-112M
- High temperature, flame retardant, phenolic meets UL 94 HB
- Crimp or 1/4" quick connect terminals
- In-line connection

Agency information

- UL Recognized: (IZLT2, E14853) HFA recognized with use of No. 12 AWG copper conductors secured with Thomas & Betts crimping tool WT-112M
- HFA-HH not UL Recognized

Ordering
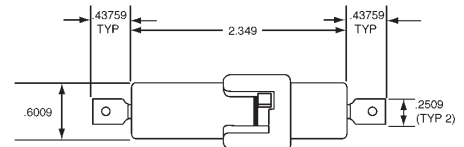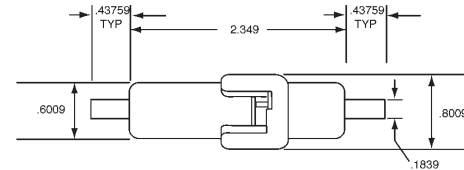
- Specify packaging, product, and option code

General specifications

- Temperature Rating (RTI): +150 °C
- IP54 rating for exposed locations

SPECIFICATIONS			
Product code	Voltage rating	Current rating	Terminal
HFA	250 V	20 A	crimp
HFA-HH	250 V	20 A	1/4 Quick connect

Dimensions-inches

Drawing not to scale

Component	Material
Body	Phenolic
crimp	Copper, tin-plated

PACKAGING CODE	
Packaging Code	Description
Blank	10 pieces of fuseholders packed into a carton
BK	20 pieces of fuseholders packed into a carton

OPTION CODE	
Option Code	Description
-R	RoHS compliant version

F·A·T·N
Powering Business Worldwide

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.